GREAT BRITAIN
D7553.1
#266,528

# PATENT SPECIFICATION

Application Date: Feb. 9, 1926. No. 3744/26.

266,528

Complete Left: Sept. 20, 1926.

Complete Accepted: March 3, 1927.

## PROVISIONAL SPECIFICATION.

### A Device for Holding a Tea-cup and Light Refreshments.

We, CUBE TEAPOTS LIMITED, British company, and ROBERT CRAWFORD JOHNSON, British subject, both of Campbell Yard, Leicester, in the County of Leicester, do hereby declare the nature of this invention to be as follows:—

This invention relates to a device for holding a tea-cup and light refreshments and has for its object to overcome the difficulty experienced when no table is provided and the tea-cup and plate have to be held in the hand.

To this end according to the invention the device comprises a palette having suitable depressions or recesses therein for supporting a tea-cup and light refreshments such as a piece of cake or biscuit respectively. For gripping the palette a hole may be provided of suitable shape for the insertion of the thumb, in the same form as is used for the ordinary artist's palette.

The device may be made of any suitable material, but preferably of earthenware or porcelain.

Dated the 28th day of January, 1926.

G. F. REDFERN & Co.,
15, South Street, Finsbury, E.C. 2,
Agents for the Applicants.

## COMPLETE SPECIFICATION.

### A Device for Holding a Tea-cup and Light Refreshments.

We, CUBE TEAPOTS LIMITED, a British company, and ROBERT CRAWFORD JOHNSON, British subject, both of Campbell Yard, Leicester, in the County of Leicester, do hereby declare the nature of this invention and in what manner the same is to be performed, to be particularly described and ascertained in and by the following statement:—

This invention relates to a device for holding a tea-cup and light refreshments and has for its object to overcome the difficulty experienced when no table is provided and the tea-cup and plate have to be held in the hand.

To this end according to the invention the device comprises a palette or plate having suitable depressions or recesses therein for supporting a tea-cup and light refreshments such as a piece of cake or biscuit respectively. For gripping the palette a hole is provided of suitable shape for the insertion of the thumb, in the same form as is used for the ordinary artist's palette.

The device may be made of any suitable material, but preferably of earthenware or porcelain.

To enable the invention to be fully understood I will describe it by reference to the accompanying drawing, in which:—

Figure 1 is a plan view of a palette or plate constructed in accordance with the invention for supporting a cup for tea or other beverages and light edible refreshments.

Figures 2 and 3 are, respectively, sections on the lines 2—2 and 3—3, Figure 1.

*a* is the palette or plate made of any suitable material, but preferably earthenware or porcelain, and *b*, *c* the respective depressions therein for receiving a

[Price 1/-]

266,528 COMPLETE SPECIFICATION 1 SHEET

[This Drawing is a reproduction of the Original on a reduced scale]

Fig. 2.

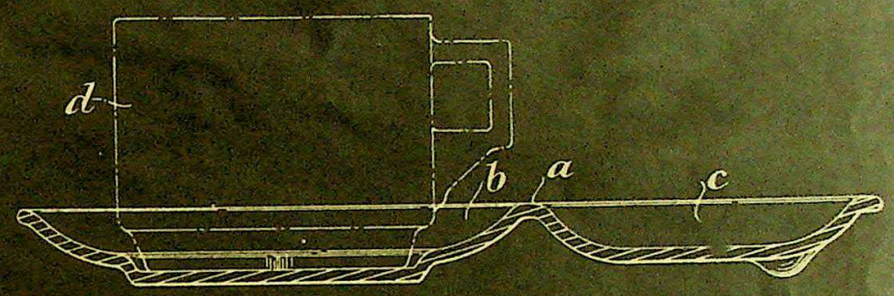


Fig. 1.

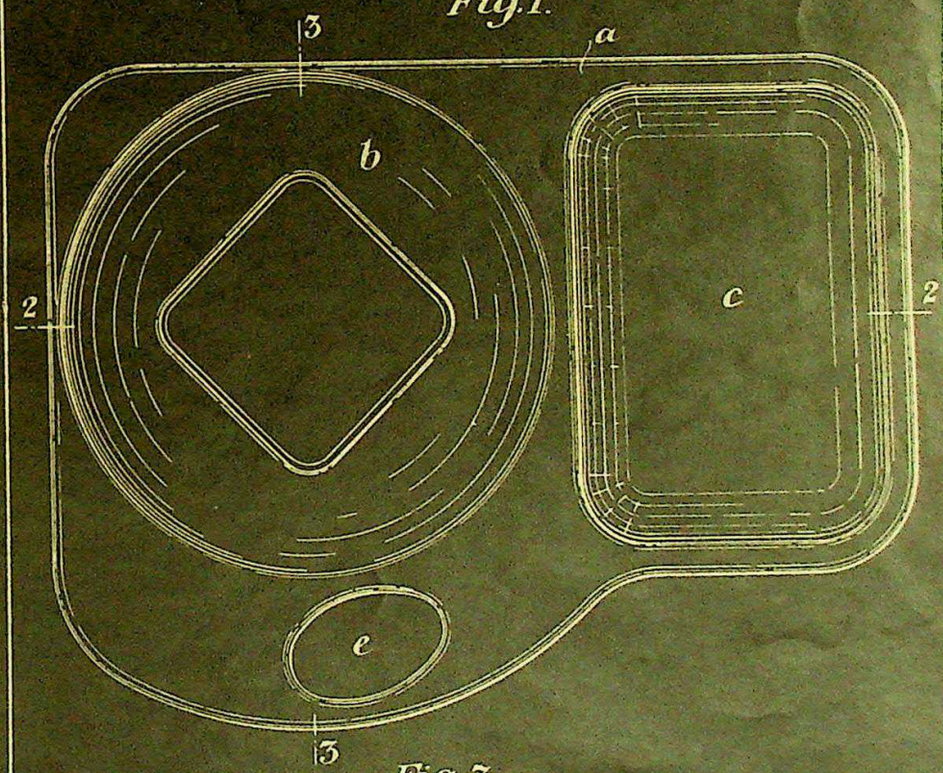


Fig. 3.

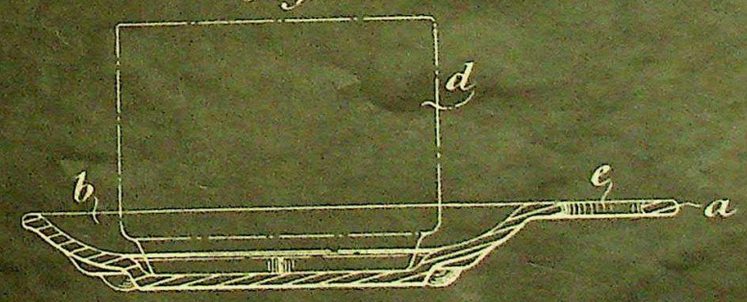


Charles & Read Ltd Photo Litho

cup, indicated by dotted lines at *d*, Figures 2 and 3, for containing tea, coffee, or other beverage, and at *c* for a piece of cake, biscuit, bread and butter or other edible, the said palette therefore functioning as a combined saucer for a beverage cup and a plate for edibles. *e* is the hole which may be provided in the palette *a* for the insertion of the thumb to enable the palette to be supported by the hand in the same way as an artist's palette.

Having now particularly described and ascertained the nature of our said invention and in what manner the same is to be performed, we declare that what we claim is:—

1. A device for holding a cup and light refreshments, comprising a palette or plate provided with recesses for respectively supporting the cup and edibles and with a hole for the insertion of the thumb to enable the palette to be supported by hand in the same way as an artist's palette.

2. The device functioning as a combined saucer for a beverage cup and plate for edibles as hereinbefore described and illustrated in the accompanying drawing.

Dated the 20th day of September, 1926.

G. F. REDFERN & Co.,
15, South Street, Finsbury, E.C. 2,
Agents for the Applicants.

Reference has been directed, in pursuance of Section 7, Sub-section 4, of the Patents and Designs Acts, 1907 and 1919, to Specification No. 15,022 of 1900, and, in pursuance of Section 8, Sub-section 2, to Specification No. 255,643.

Redhill: Printed for His Majesty's Stationery Office, by Love & Malcomson, Ltd.—1927.

GREAT BRITAIN
92
D7/553.1
#280,300
(Trays)
44
14
Orig. index
F
Class
65
53-7

Nov 17, 1927.

COMPLETE SPECIFICATION

1 SHEET

Fig. 1.

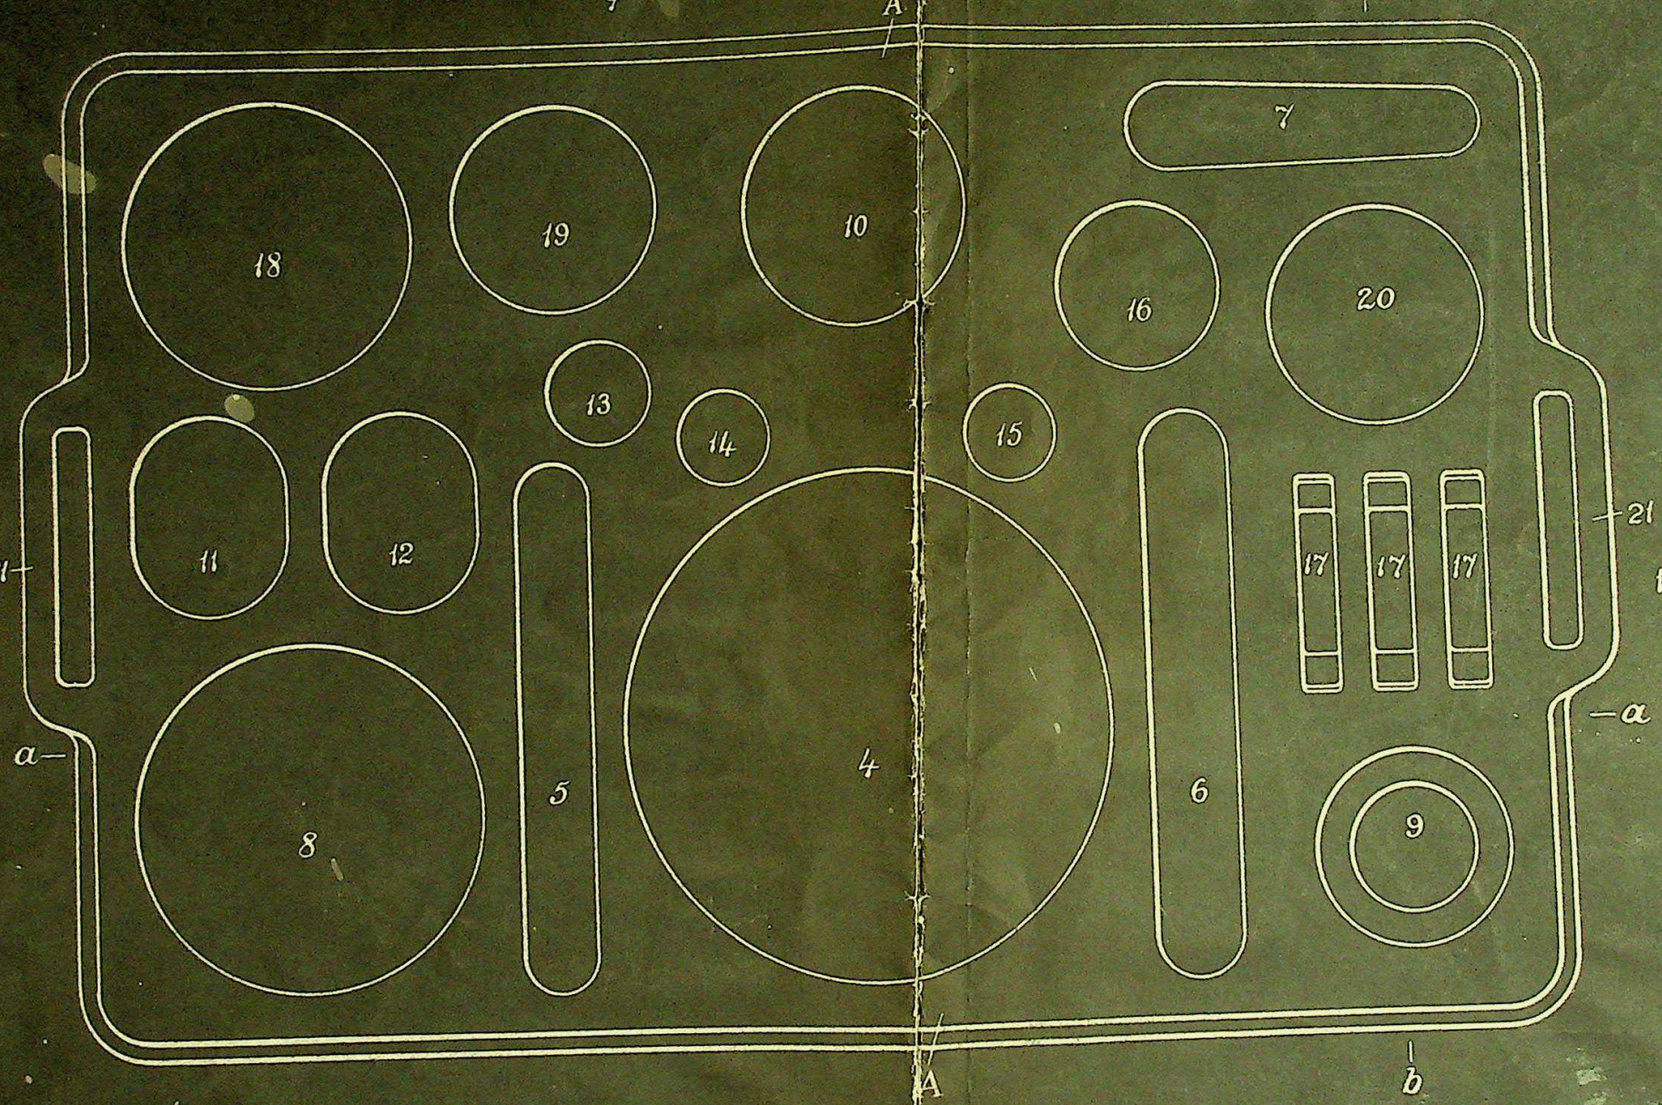


Fig. 3.

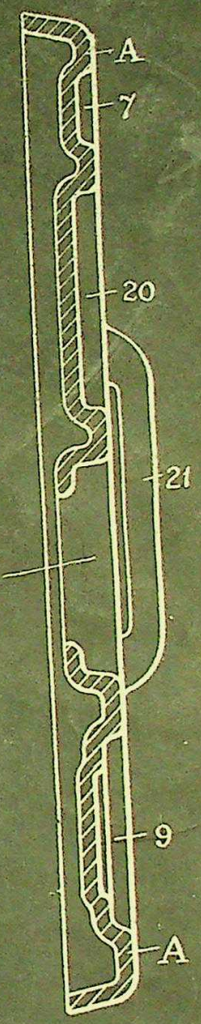


Fig. 2.

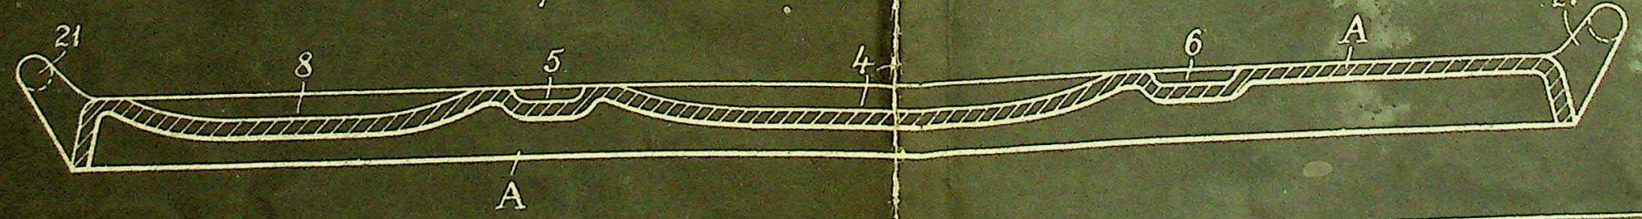


[This Drawing is a reproduction of the Original on a reduced scale.]

Charles & Read Ltd Photo Litho

LIBRARY
DEC 29 1927
PATENT OFFICE

# PATENT SPECIFICATION

Application Date: Aug. 17, 1926. No. 20,267/26. **280,300**

Complete Left: May 14, 1927.

Complete Accepted: Nov. 17, 1927.

## PROVISIONAL SPECIFICATION.

### Improved Construction of Tray.

I, JOHN HENRY BENNETT, British subject, of 185, Piccadilly, London, W. 1, do hereby declare the nature of this invention to be as follows:—

The object of this invention is to construct a tray, waiter or the like as used in restaurants, hotels, the home and other places, and whereby a waiter can see at a glance whether he or she has all the food or utensils required.

According to my invention I construct a tray or waiter with depressions or recesses, ridges or equivalent in or on the tray, of the desired number, size and shape to receive food or a utensil or utensils carrying food, and such tray or waiter is preferably constructed to suit the meal it is intended to be used for.

As an instance of carrying my invention into effect, I construct a tray, say for breakfast or tea, with depressions or recesses for receiving direct, food or condiment such as bread, marmalade, jam, salt, pepper, mustard, sugar, butter, toast, spoons, forks and knives and meat, and I also form depressions or recesses or ridges to receive, say a tea cup, tea pot, hot water jug or other movable article and these recesses or depressions or ridges may be arranged on the tray, say a recess acting as a large plate at the middle next to one side, with recesses on either side, one for forks and the other for knives with a recess across next to the plate recess for a spoon. On the left in line with the large plate is a recess acting as a small plate whilst on the right is a recess forming a saucer for receiving a tea cup. A recess for the teapot may be next the spoon recess, whilst recesses for carrying other food or condiment or articles may be arranged on either side of the tea pot recess, and with regard to the portions constructed for carrying toast, they may be formed from a series of ridges between which the toast may be held.

For a dinner tray, recesses may also be provided for vegetables and pastry or fruit, as also for receiving a glass and decanter or syphon etc.

The tray having depressions, ridges or the like may be made by stamping or by moulding or the recesses or ridges may be formed by applying rings or devices to a flat tray.

As will be understood the recesses or depressions, or rings or devices may be formed in or applied to a tray or waiter in any desired shape or number according to requirements, and the tray may be provided with handles by which it can be carried.

Dated this 17th day of August, 1926.

H. GARDNER & SON,

Chartered Patent Agents,
173—4—5, Fleet Street, London, E.C. 4,
Agents for the said Applicant.

## COMPLETE SPECIFICATION.

### Improved Construction of Tray.

I, JOHN HENRY BENNETT, British subject, of 185, Piccadilly, London, W. 1, do hereby declare the nature of this invention and in what manner the same is to be performed, to be particularly described and ascertained in and by the following statement:—

It has been proposed to construct trays or stands with recesses or holes or ridges for

receiving articles such as a tea set, various cups, saucers, plates, decanters, glasses, bottles and also material and various parts of say, a coffee making apparatus, also toilet requisites, but I have no knowledge of any tray provided with holes or depressions together with raised portions, whereby same can be used with all the appliances and materials necessary for use with a meal, and the object of my invention is to so construct a tray that everything necessary for a meal can be applied thereto or therewith whereby a waiter can see at a glance whether he or she has all the food and utensils required.

My invention will be clearly understood from the following description aided by the annexed drawings which illustrate one example of my invention.

Figure 1 is a plan of a tray; Figure 2 a section on the line *a a* of Figure 1 and Figure 3 a section on the line *b b* of Figure 1.

In carrying my invention into effect, I construct a tray A, say for breakfast or tea as in the drawings, with depressions or recesses for receiving direct, food or condiment such as bread, marmalade, jam, salt, pepper, mustard, sugar, butter, toast, spoons, forks and knives and meat, and I also form depressions or recesses or ridges to receive, say a tea cup, tea pot, hot water jug and these recesses or depressions or ridges are arranged in or on the tray, say a recess 4 acting as a large plate at the middle next to one side, with recesses on either side, one 5 for forks and the other 6 for knives with a recess 7 near one corner for spoons. On the left in line with the large plate recess 4 is a recess 8 acting as a small plate whilst on the right is a recess 9 forming a saucer for receiving a tea cup. A recess 10 for the teapot may be next the spoon recess 7, whilst recesses 11, 12, 13, 14, 15, 16, 17 and 18 for carrying jam, marmalade, butter, salt, pepper, sugar, toast and bread respectively are arranged at various positions on the tray, and with regard to the portions constructed for carrying toast, they may be formed from a series of recesses 17, 17, 17 or ridges between which the toast may be held.

Recesses 19 and 20 receive vessels containing hot water and milk.

For a dinner tray, recesses may be also provided for vegetables and pastry or fruit, as also for receiving a glass and decanter or syphon etc.

As will be understood the recesses or depressions, or rings or devices are formed in or on a tray or waiter in any desired shape or number or position, and the tray may be provided with handles 21, 21 by which it can be carried.

Having now particularly described and ascertained the nature of my said invention and in what manner the same is to be performed, I declare that what I claim is:—

A tray formed with depressions or recesses or ridges or equivalent in or on the surface for carrying food or condiment and food or condiment carrying utensils and appliances for use therewith, the depressions or ridges being of a shape, size and number to suit the required food and utensils for a meal.

Dated this 14th day of May, 1927.

H. GARDNER & SON,
Chartered Patent Agents,
173—4—5, Fleet Street, London, E.C. 4,
Agents for the said Applicant.

Reference has been directed, in pursuance of Section 7, Sub-section 4, of the Patents and Designs Acts, 1907 and 1919, to Specifications Nos. 254,533, 166,737, 8350 of 1910, 5913 of 1899, 16,901 of 1894, 10,624 of 1894 and 2470 of 1881.

Redhill: Printed for His Majesty's Stationery Office, by Love & Malcomson, Ltd.—1927.

~~D44:10 vE~~ 92
D7/553.1

ritish Patent - June 30, 1932

375,486 COMPLETE SPECIFICATION 1 SHEET

FIG. 1.

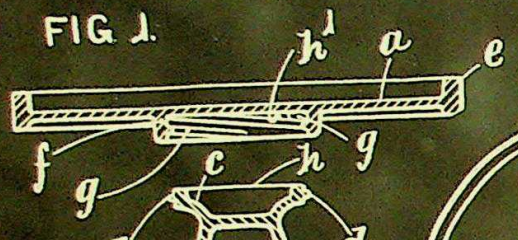


FIG. 2.




FIG. 3.

FIG. 4.




FIG. 5.

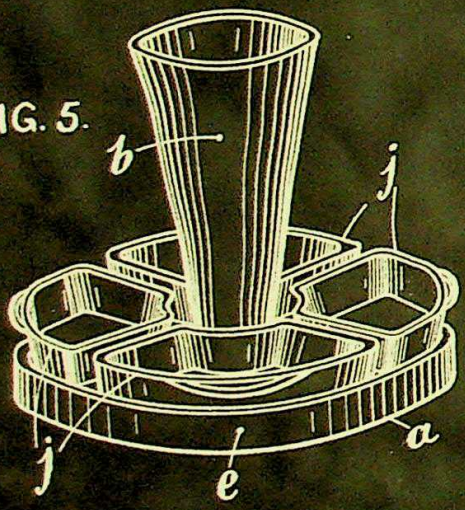


[This Drawing is a reproduction of the Original on a reduced scale.]

Charles & Read Ltd. Photo Litho.

# PATENT SPECIFICATION

**375,486**

Application Date: May 1, 1931. No. 12,931/31.

Complete Left: Jan. 9, 1932.

Complete Accepted: June 30, 1932.

## PROVISIONAL SPECIFICATION.

### Improvements in and relating to Pressed Glass Comportes and Cake-stands.

I, HENRY HARLEY PITT, of The Farm, Christon Bank, in the County of Northumberland, a British subject, do hereby declare the nature of this invention to be as follows:—

This invention relates to pressed glass comportes and cake-stands comprising two or more portions, and has for its object to provide a novel construction.

According to this invention I provide a pressed glass comporte or cake-stand comprising two or more separable members, for example, a stand portion and a plate or like portion, said portions being detachably connected together without the aid of metal, rubber or other material than glass by the engagement of an interrupted male thread on one part with a corresponding interrupted female thread in the other part. The stand portion preferably also forms, when inverted, a vase for flowers or the like.

As applied to a comporte, the stand portion comprises a vase of any suitable shape and height having a circular base formed around its periphery with a male thread in two or more interrupted sections. The plate portion is of any desired size, and may be circular, oval, polygonal or other desired shape. Preferably it has an upstanding peripheral flange. Centrally of its underface is a hollow boss formed with a female thread in interrupted sections corresponding to the male thread sections of the base of the stand portion. The female thread sections terminate in abutments so that, by inverting the stand portion and introducing its thread sections into the spaces between the female thread sections, said threads can be engaged and a partial rotation of one portion brings the ends of the male thread sections up against said abutments and a firm glass-to-glass connection is made.

I thus provide a two-part comporte or cake-stand, the portions of which are connected together without the aid of metal, rubber or other material than glass and can be separately used as a vase and a plate respectively. The vase and plate may be decorated in any suitable manner.

Dated this 1st day of May, 1931.

MEWBURN ELLIS & Co.,
70 & 72, Chancery Lane, London, W.C. 2,
and
3, St. Nicholas' Buildings, Newcastle-on-Tyne,
Chartered Patent Agents.

## COMPLETE SPECIFICATION.

### Improvements in and relating to Pressed Glass Comportes and Cake-stands.

I, HENRY HARLEY PITT, of The Farm, Christon Bank, in the County of Northumberland, a British subject, do hereby declare the nature of this invention, and in what manner the same is to be performed, to be particularly described and ascertained in and by the following statement:—

This invention relates to pressed glass comportes and cake-stands comprising two portions, and has for its object to provide a novel construction.

According to this invention I provide a pressed glass comporte or cake-stand comprising two separable portions detachably connected together by the engagement of interrupted male thread sections on one portion with corresponding interrupted female thread sections in the other portion, said thread sections being integral with the glass of which the said separable portions are composed and being spaced a distance apart sufficient to allow the male thread sections to be introduced between the female thread sections and engaged therewith by a fraction of a turn. The stand portion also forms, when inverted, a vase for flowers or the like.

I will more fully describe my invention with reference to the accompanying drawings wherein Figures 1 and 2 are sectional elevations of the two portions which together form a comporte or cake-stand in accordance with my invention, and Figures 3 and 4 are respectively an underside plan of the plate portion and a plan of the stand portion thereof, and Figure 5 is a perspective elevation of the complete comporte or cake-stand together with four separate dishes.

Referring to the said drawings, the comporte or cake-stand illustrated in Figs. 1 to 5 consists of a plate portion *a* and a stand portion *b*. The stand portion comprises a vase of any suitable shape and height with a circular base *c* having formed around its periphery two sections *d* of male thread commencing at points approximately diametrically opposite. If desired more than two sections of male thread may be provided. The plate portion is of any desired size, and may be of circular shape as shown or of oval, polygonal or other desired shape. Preferably it has an upstanding peripheral flange *e*. Centrally of its underface is a hollow boss *f* formed with sections *g* of female thread corresponding to the male thread sections of the base of the stand portion.

When the stand portion *b* is inverted and its thread sections *d* are introduced into the spaces between the female thread sections *g*, said thread sections can be engaged and a partial rotation of one portion causes said thread sections to act as wedges and bring the rim *h* of the stand portion against the flat surface $h^1$ within the boss of the plate portion and a firm glass-to-glass connection is made, the wedging effect being sufficient to resist accidental disconnection. When however one portion is purposely partially rotated, its initial movement frees the rim *h* from the surface $h^1$ and further rotation is easy. It will be noticed that, in the example illustrated, the spaces between the thread sections *d* and *g* are greater than the length of said sections, and ample clearance for easy engagement and disengagement is provided.

I thus provide a two-part comporte or cake-stand, the portions of which are connected together without the aid of metal, rubber or other material than the glass of which they are composed, said portions being capable of being separately used as a vase and a plate respectively. The vase and plate may be decorated in any suitable manner. Also as illustrated in Fig. 5, the complete comporte can be converted and provided with loose segmental dishes *j* which can be used to contain biscuits, butter, cheese and the like while the vase *b* is used for celery or otherwise, as desired.

Having now particularly described and ascertained the nature of my said invention, and in what manner the same is to be performed, I declare that what I claim is:—

1. A pressed glass comporte or cake-stand comprising two separable portions detachably connected together by the engagement of interrupted male thread sections on one portion with corresponding interrupted female thread sections in the other portion, said thread sections being integral with the glass of which the said separable portions are composed and being spaced a distance apart sufficient to allow the male thread sections to be introduced between the female thread sections and engaged therewith by a fraction of a turn.

2. A pressed glass comporte or cake-stand according to claim 1 comprising a stand portion with a base formed with two or more interrupted male thread sections and a plate portion with a central hollow boss formed with interrupted female thread sections corresponding to the male thread sections of the stand portion.

3. For application to a plate portion to form therewith a pressed glass comporte or cake stand as claimed in claim 2, a stand portion with a base formed with two or more interrupted male thread sections corresponding to the female thread sections of the plate portion.

4. For application to a stand portion to form therewith a pressed glass comporte or cake stand as claimed in claim 2, a plate portion with a central hollow boss formed with interrupted female thread sections corresponding to the male thread sections of the stand portion.

5. The improved pressed glass comporte or cake-stand substantially as and for the purposes herein described with reference to the accompanying drawings.

Dated this 9th day of January, 1932.

MEWBURN, ELLIS & Co.,
70 & 72, Chancery Lane, London, W.C. 2,
and
3, St. Nicholas' Buildings, Newcastle-on-Tyne,
Chartered Patent Agents.

Redhill: Printed for His Majesty's Stationery Office, by Love & Malcomson, Ltd.—1932.

ARTISTS MATERIAL
~~D44 15.K~~ 92
XD7/553.1
p.264
XD 44 17.5



# ALUMINUM PALETTES

Non-porous; do not absorb colors; extra light in weight.
For Oil, Tempera or Water Color painting.

**No. 935 Oval**
Size 12½" x 8½" with 12 color wells.
Price each $1.15



**No. 936 Oval**
Size 15½" x 11" with 16 color wells.
Price each $1.45

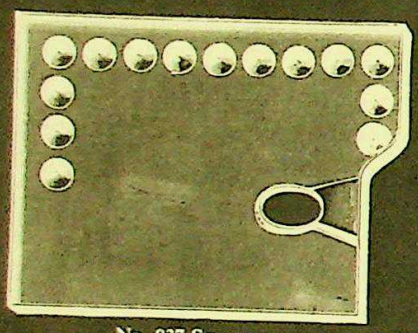

**No. 937 Square**
Size 14½" x 10½" with 15 color wells.
Rim ⅜" high, with detachable tin cup.
Price each $2.85

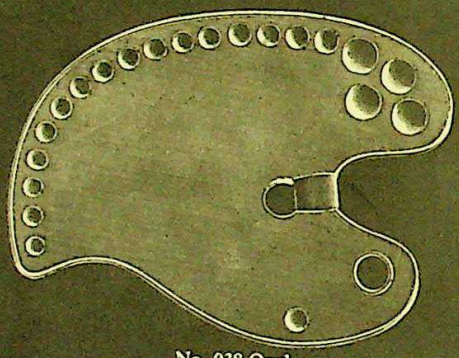

**No. 938 Oval**
**Studio Arm Palette**
Size 23½" x 17" with 17 small and 4 large color wells.
Supplied with one aluminum cup.
Price each $4.00



## METAL PALETTE

**No. 939**

Highly polished black lacquer; inside, dull white enamel. Folding. Very useful on sketching tours.

Receptacles for 16 colors (size open 9¼" x 7¼")
Price each $1.80
Receptacles for 20 colors (size open 9¼" x 8¼")
Price each $2.25

## MIXING PALETTE

**No. 851**

Black lacquered tin mixing palette, white enamel on mixing side, for oil or water colors, with 7 compartments and 2 mixing divisions.
Size 7¼" x 3¼"
Price each $0.15

500,460
92
D7/553.1
BRITIAN
2-9-39



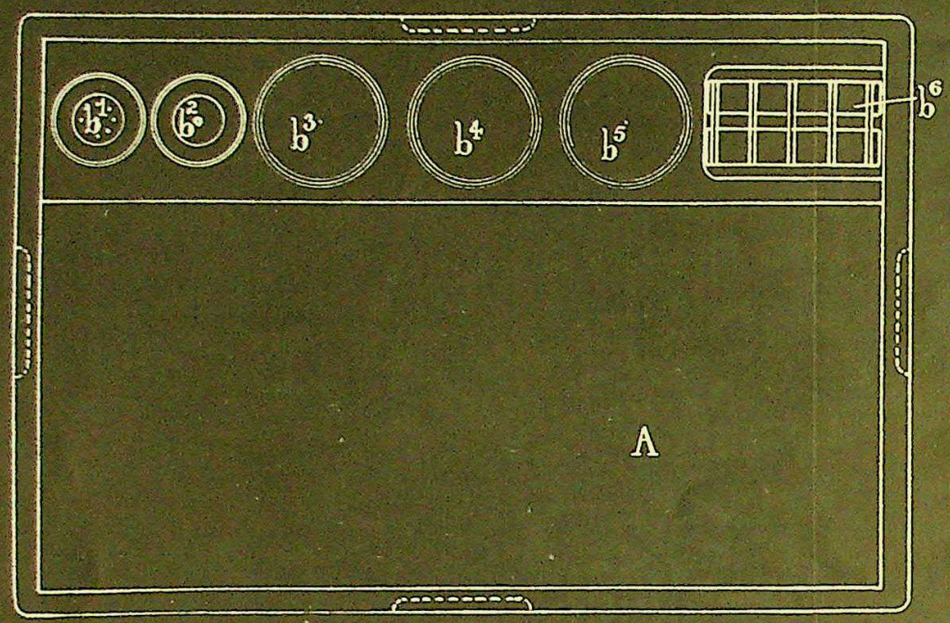


Fig. 1.

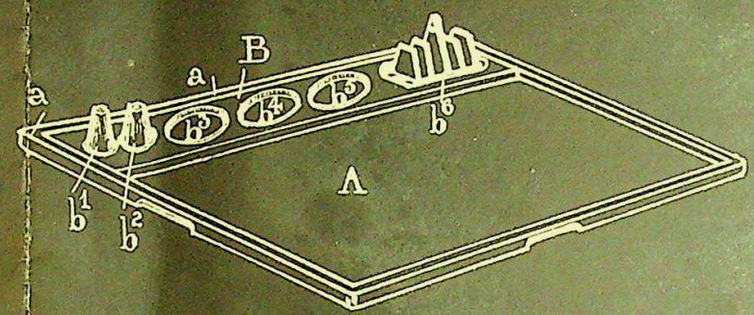


Fig. 2.

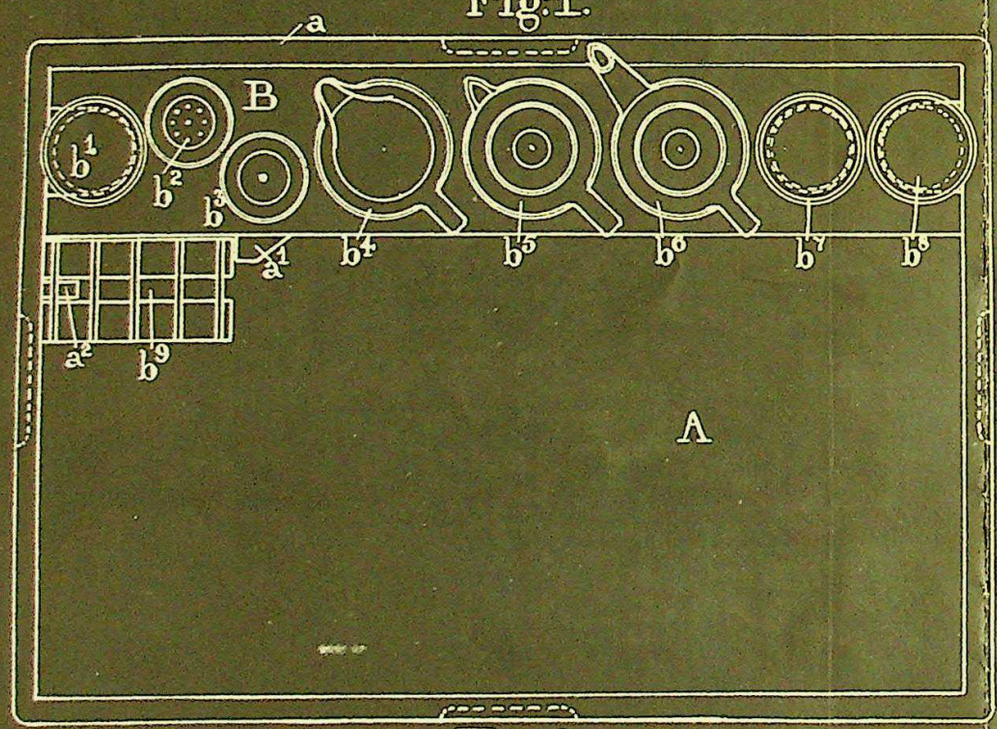


Fig. 3.

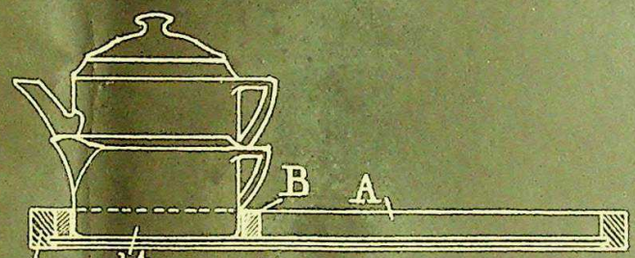


Fig. 5.

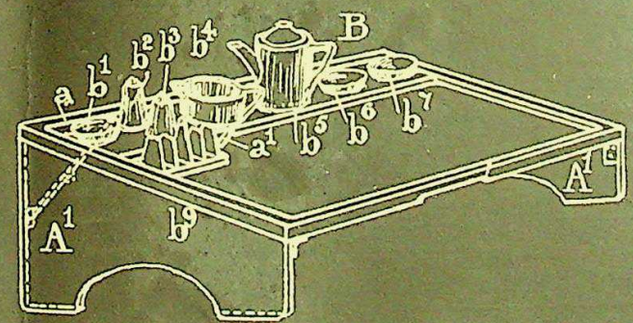


Fig. 4.

This Drawing is a reproduction of the Original on a reduced scale.

Malby & Sons, Photo-Lith.

# PATENT SPECIFICATION

Application Date: Feb. 8, 1938. No. 3880/38. **500,460**

Complete Specification Left: Dec. 10, 1938.

Complete Specification Accepted: Feb. 9, 1939.

## PROVISIONAL SPECIFICATION

## Improvements in Domestic Trays

We, MALLINSON & ECKERSLEY LIMITED of Worsley Street, New Bailey Street, Salford, County of Lancaster, a British Company and ARTHUR BENJAMIN MALLINSON, Director with the said Company, a British Subject, do hereby declare the nature of this invention to be as follows:—

This invention relates to improvements in trays for domestic use.

According to the invention the tray is formed adjacent to one edge with a series of recesses each adapted to receive one of a series of receptacles or dishes such as a salt cellar, pepper pot, sugar bowl, butter dish, marmalade dish, toast rack and the like.

The recesses may be formed by securing a strip of material to the underside of the tray and cutting holes of suitable size or shape for the various articles through the surface of the tray. The strip of material may be secured by glue, pins, screws or in any other suitable way.

In an alternative construction the recesses may be formed in the tray itself, in which case the holes are not cut right through the material and in another construction the recesses are formed by cutting holes in a strip of material secured to the top surface of the tray, the surface of the tray forming the bottom of the recesses.

The recesses may vary in shape, size and number according to requirements and size of tray.

The invention is particularly applicable to wood trays although not limited thereto and is especially useful when the tray is liable to be used in an inclined position, such as on board ship or by a person in bed, as the recesses in which the various articles are located retain them in position when the tray is not horizontal.

Dated this 7th day of February, 1938.

J. OWDEN O'BRIEN & SON,
Patent Agents, Manchester, 2.

## COMPLETE SPECIFICATION

## Improvements in Domestic Trays

We, MALLINSON & ECKERSLEY LIMITED of Worsley Street, New Bailey Street, Salford, County of Lancaster, a British Company and ARTHUR BENJAMIN MALLINSON, Director with the said Company, a British Subject, do hereby declare the nature of this invention and in what manner the same is to be performed to be particularly described and ascertained in and by the following statement:—

This invention relates to improvements in trays for domestic use of the type formed with a series of recesses each adapted to receive and prevent movement of one of a series of receptacles or dishes such as are required for furnishing a tray for serving meals.

Hitherto such recesses have been located substantially over the whole surface of the tray and include recesses for the reception of a plate or dish and a cup and saucer or other drinking vessel from which the meal is actually eaten and drunk.

According to the invention the tray is provided along one or more edges, preferably along the top edge with a series of recesses to locate and prevent movement of the various articles required to furnish the tray for serving a meal, the remainder of the surface of the tray being flat or level to receive the plate or dish and cup and saucer or other drinking vessel from which the meal is actually eaten and drunk.

The tray is particularly applicable for serving meals, particularly breakfast in bed or on board ship and a tray for use for the former purpose may be provided with folding feet or legs which when extended will support the tray over the person in bed.

Any desired number of recesses may be provided to locate the various articles which may include a tea or coffee pot, milk jug, hot water jug, sugar basin, butter dish, toast rack, marmalade dish and salt and pepper pots but the invention is not limited to any particular number or shape of the recesses.

The tray may be of wood, plywood,

fibre board, metal, glass or any combination of these materials.

The invention will be described with reference to the accompanying drawings in which:—

Fig. 1 is a plan of a tray having six recesses applicable for receiving a salt pot, pepper pot, sugar dish, butter dish, marmalade dish and toast rack.

Fig. 2 is a perspective view of the tray shown in Fig. 1.

Fig. 3 is a plan of a larger tray having nine recesses to receive a milk jug, tea or coffee pot and hot water jug in addition to the other items shown in Figs. 1 and 2.

Fig. 4 is a perspective view of the tray shown in Fig. 4 showing the tray provided with folding legs by which it can be supported over the body of the user when the latter is in bed.

Fig. 5 is a transverse section of the tray.

In both forms of the tray A illustrated in the drawings it is provided with a rim $a$ and a strip B of wood or other suitable material is secured to the tray just inside the rim preferably along the top or far edge of the tray. The strip B is preferably of the same depth as the rim $a$ so that it lies flush with the top thereof and is provided with a number of recesses $b^1$, $b^2$ etc. to locate the various articles. The strip B is secured to the tray A by glue, pins, screws or other suitable means.

The recesses $b^1$, $b^2$ etc. are of a shape and size corresponding to the item to be located therein. In the tray A shown in Figs. 1 and 2 the strip B is formed with six recesses $b^1$—$b^6$ of a shape and size to receive a pepper pot, salt pot, sugar dish, butter dish, marmalade dish and toast rack respectively.

In the tray A shown in Figs. 3, 4 and 5 the strip B is formed with eight recesses $b^1$—$b^8$ of a shape to receive a sugar basin, pepper pot, salt pot, milk jug, hot water jug, tea or coffee pot, butter dish and marmalade dish respectively. In this construction a ninth space $b^9$ to receive and locate a toast rack is formed by two small projections $a^1$ and $a^2$ arranged in a corner of the tray A below the strip B. If desired the strip B may be raised above the level of the rim A to give extra support to articles such as a tea pot, coffee pot or jug.

As shown in Fig. 4 the tray A may be provided with folding legs $A^1$ at each side to raise the underside of the tray clear of the bed and if desired above the body of the user. The legs $A^1$ may be of wood or other suitable material and hinged and stayed in any suitable manner to the sides or bottom of the tray.

Instead of the recesses $b^1$, $b^2$ etc. being formed in a separate strip of material secured to the tray A the rim $a$ at the top edge of the latter could be extended in width and the recesses formed therein.

In an alternative construction when the thickness of the tray permits the recesses may be formed in the tray itself in which case the holes would either not be cut right through the tray or a strip of material would be affixed to the underside of the tray below the holes.

Although the drawings show the invention applied to a rectangular tray it is equally applicable to trays of other shapes.

Having now particularly described and ascertained the nature of our said invention, and in what manner the same is to be performed, we declare that what we claim is:—

1. A domestic tray of the type referred to provided along one or more edges, preferably along the top edge, with a series of recesses to locate and prevent movement of the various articles required to furnish the tray for serving a meal the remainder of the surface of the tray being flat or level to receive the plate or dish and cup and saucer or other drinking vessel from which the meal is actually eaten and drunk.

2. A domestic tray as in claim 1 in which the series of recesses are formed in a locating strip secured to the tray inside the rim at one side or sides thereof.

3. A domestic tray as in claim 1 in which the series of recesses are formed in the rim along a side or sides of the tray, the rim being enlarged in width to receive them.

4. A domestic tray as in claim 2 or 3 having a projection or projections to locate a toast rack.

5. A domestic tray as in any of the preceding claims provided with folding legs or feet.

6. A domestic tray constructed substantially as described with reference to the accompanying drawings.

Dated this 9th day of December, 1938.

J. OWDEN O'BRIEN & SON,
Patent Agents, Manchester, 2.

Leamington Spa: Printed for His Majesty's Stationery Office, by the Courier Press.—1939.

D7/553.1

"New Yorker" 8/19/50 Inside rear cover

# GETTING THE PLAY TODAY

No other Bond can match that Kentucky Tavern taste

MODERN PLASTICS 10-1953 P. 122

[redacted]

D7/553.1

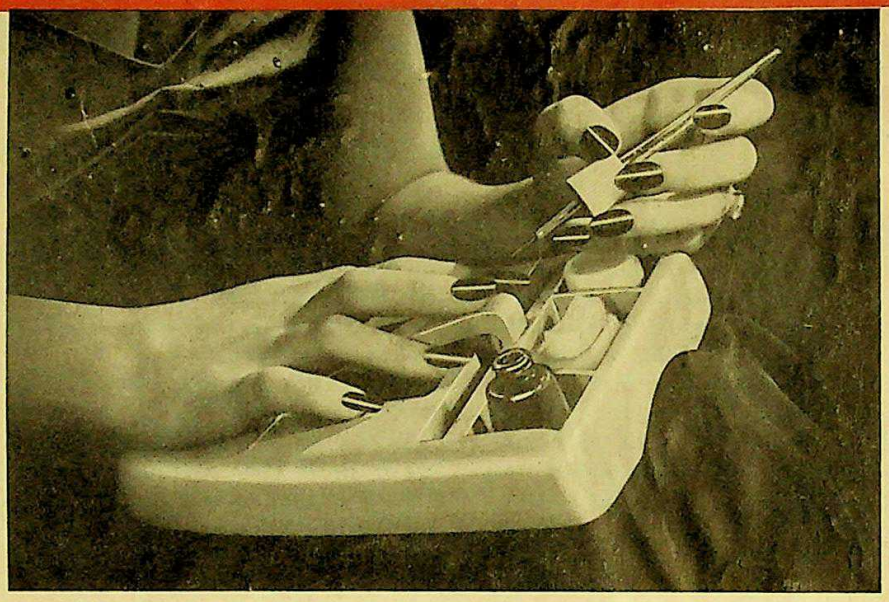

Home manicuring can be done as easily in a moving car as on the lap at home or on a desk using this holder molded of styrene. It features a raised projection in the center of the base on which one finger at a time can rest to avoid touching and smearing. The projection can also be used as a handle for moving the kit. Built-in compartments hold accessories. Made by M & M Plastic Co., 700 S. Palm Ave., Alhambra, Calif. for Cal-Del-Mfg. Co., P. O. Box 15688, Crenshaw Station, Los Angeles 8, Calif.

D7/553.1

"ESQUIRE"

JUNE 1960

p. 188


**NITE CADDY FOR MEN**

For evening transfer from trouser and jacket pockets to dresser top. Designed to hold watch, change, wallet, keys, pen, eyeglasses, everything a man ordinarily carries in his pockets. Crafted of black walnut wood and appointed with highly polished brass. A "catch all" that gives neatness and order. 10" x 7" x 3". Order No. 271.

*Just* **$5.95** Postpaid

*Send for New Free Catalog of Unusual Items.*

**DOWNS & CO., Dept. 3506A**
**816 University Pl., Evanston, Ill.**

D7/553.1

#277
#278
DESIGN BY
W
W.D. WARREN
W
Rainbow Originals
Sweeping new forms in teak
#279
A.
B.
E.
F.
C.
D.
"SVENSKA" Teak hostess trays for "Chip and Dip", Cheese, Fruit or Snacks, 16" long (Pat. Pend.) #277 — $5.00; #279 — $5.50; #278 — $6.00
WOODEN PAPER BASKETS
A. All teak or walnut, 11": $5.50; 16": $7.50. B. Teak outside Birch inside, 11": $3.75; 16": $5.00. C. "Fireproof" design. Alum. insert with fiberglass insulation. Teak or walnut, 11": $7.50. E. or F. All teak with 2 handles, 16": $9.00.
TEAK ICE BUCKET
D. Fiberglass insulation. Holds 80 cubes 16 hours. 11": $8.50.
RAINBOW
WOOD PRODUCTS INC.
12 EAST 22nd STREET • NEW YORK 10, N.Y.
SEE US at all major gift shows.
ASK FOR CATALOG!
Prices are wholesale.
SHOWROOMS: 225 Fifth Ave., New York, N.Y. • Merchandise Mart, Chicago, Ill. • Terminal Bldg., Seattle, Wash.

D7.553.1

"PACKAGING"
APRIL, 1965
P.6

DUAL PROTECTION is made possible with DuPont K-Film. The "Twin Pack" consists of two 5½ oz. cellophane packs of Corn Chips in a double-wall outer bag.

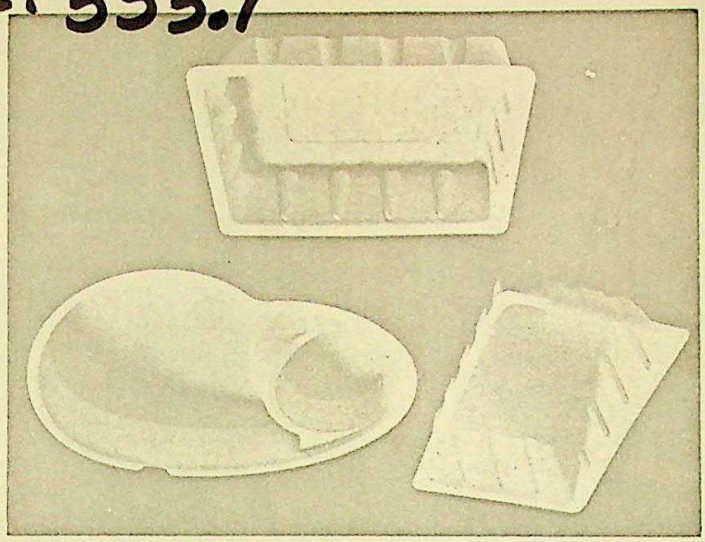

FROM SOUP TO NUTS can be packaged in Sealright Co. Inc.'s new line of rigid all-plastic food containers. "Vari-Pak" appeals to packagers of shelf-stored or frozen foods and to housewives as a cooking and serving dish. Thermoformed of high density polyethylene, it is said not to crack or tear between -80 and 250 degrees F.

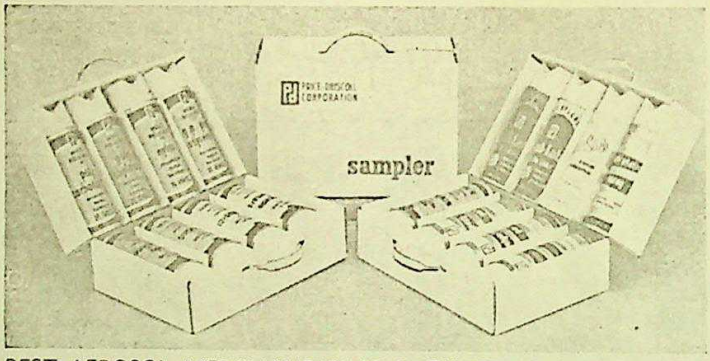


BEST AEROSOL MERCHANDISING PACKAGE of the year award went to the Price-Driscoll Corp. Sampler Kit. This was the 13th annual contest conducted by the Chemical Specialties Manufacturers Assoc.

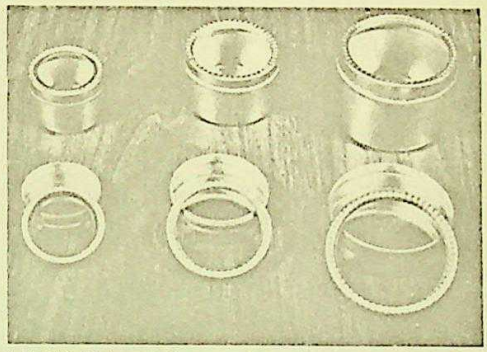

LOOK-IN windows add sales appeal to Ellisco, Inc.'s new seamless, slip cover metal cans. The windows are of crimped-in clear shatterproof plastic

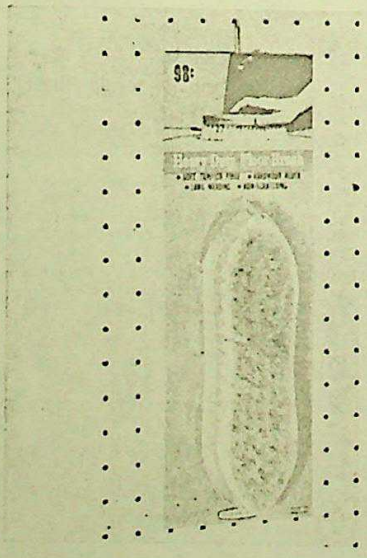

UPSIDE DOWN PACKAGING (left). This floor brush is blister packed with bristle face up, contrary to industry practice of packaging the blocks up.

Tilt in bowl brush (right), emphasized by the shape of the blister, makes a telling sales point. An action photo shows women how to handle the brush.

Both packages are produced by Jackmeyer Corp. on a 4-color 24-pt. clay-coated card and heat-sealed with .015 acetate blister for Craftsman Brush Co.

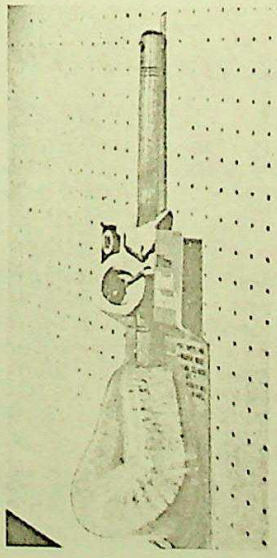

D7/553.1

DOMUS
6-71
p. 27

Orrefors, Rörstrand, Neuzeughammer, Am-Riedel: danesi, Dansk; tedesche: Braun, Graiglas, Rosenthal, Staff & Schwarz, Wusthof Dreizackwerk, italiani).

Concorso: «la proposta di un concetto e sistema per ... funzionalmente l'attrezzatura il pasto». Chiusura del 21 maggio '70. Partecipanti progettisti, da 26 paesi, internazionale: Rodolfo Bonetto, Bora Horvath Pintaric, Lord Kitty, Walter Schaer, presidente Hald.

Il premio è stato vinto, ex aequo, da un giovane designer tedesco, Alexander Neumeister di Monaco, che ha proposto una «macchina prima colazione» consistente in un distributore automatico. Tre giovani designers italiani, Gianna Castiglioni, Giorgio e Aldo Lanza di Milano, che hanno proposto un «tavolo-contenitore-tavolo» che illustriamo nella sua bianco (A).

Si tratta di questo mobile, da un lato e su ruote che alloggia alcune sedie (pieghevoli) e tutto quanto per il pranzo (impilate) dal quale si «estrae» il tavolo con il proprio apparato ruote (che fa da copertura contenitore quando lo si ri-disegno spiega meglio la questo modo tutta l'attrezzatura del pranzo può essere raccolta concentrata in un solo vocabolo e spostabile (non richiede propria e apposita stanza). A questo «contenitore tavolo» si aggiungono, come prevede, un «contenitore» e un «modulo cucina» sullo stesso principio e le ruote e anch'essi su ruote, una di due interi ambienti ... «impacchettata» in lumi.

Premio qui anche tre altri prodotti: La «party palette» (B) ... in piedi, disegnata da Loewe di Gelsenkirchen, (terzo premio) è un piatto-... si infila il pollice con ... volezza ed in cui è inbicchiere, in modo che ... mano possa reggere tutto, ... bisogno di un piano. L'altra mano impugnerà ... è una speciale posata ... un cucchiaio terminante ... forchetta; i piatti-vassoio ...

... di Ginevra (terzo premio) invece un «cuoci-tavolo» (C), elettrico, per ... ognuno incapsulato in ...

... Siune e Martin Larsen, (ultimo premio) propongono ... piatti, brocche e bicchieri ... ognuno di un supporto in plastica rigida, dotato un contenitore interno, ... sottilissimo, da gettarsi ... uso. I supporti sono impilabili «anche (D).

*... the spirit that ... in the inter-... «Table ...» ... sponsored by «Gruppo ... di Europea ... table-ware. Theme ... competition: new ideas to ... functionalize the eating ...*

*... through the pic-*

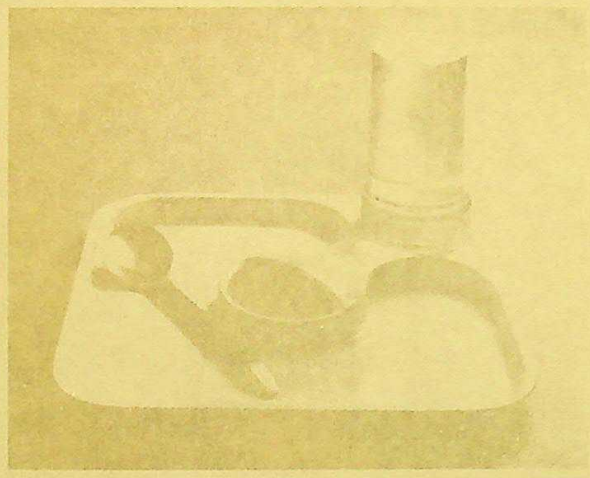

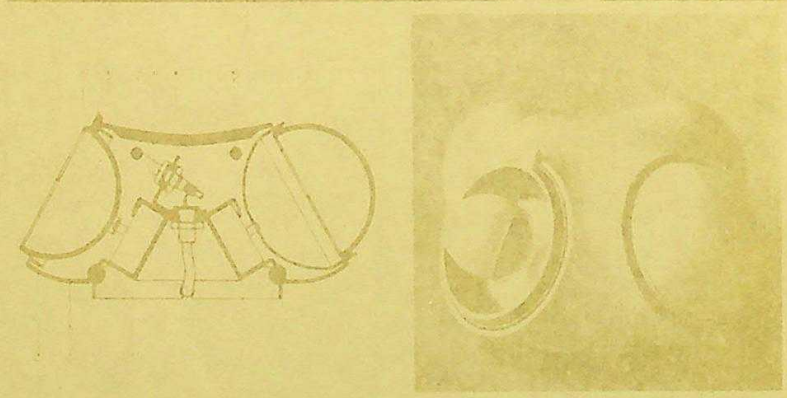

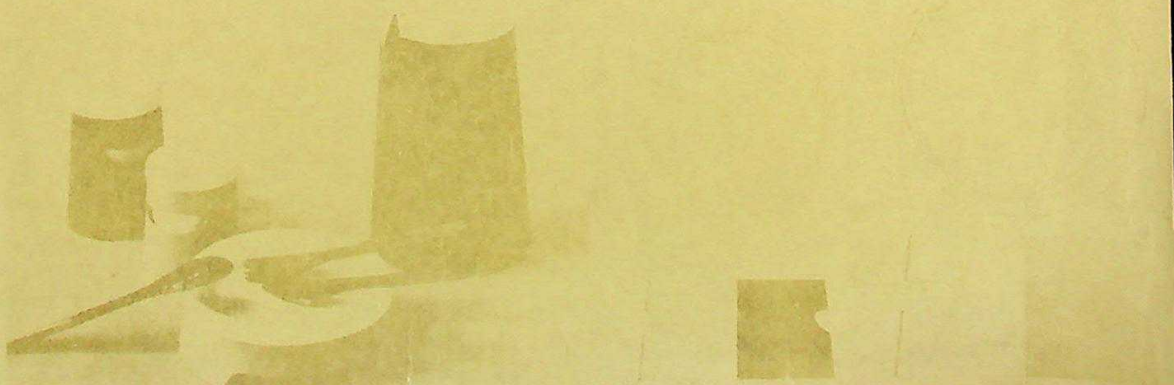

D7.553.1

Gifts & Decorative Accessories

p. 55

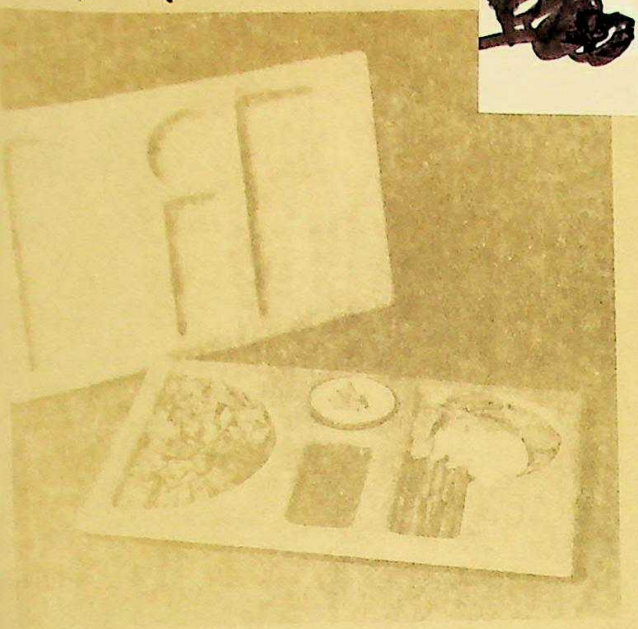

*Whether your customers are entertaining four or forty during the holidays, they will want special serving pieces . . . formal or casual . . . for hot or cold dishes. The items shown here also make welcome hostess gifts. They should be promoted in both ways.*

DIP tray in ceramic, 20½ by 13½ in., holds crackers, canapés, dips. In white, yellow and orange, $8. Ted Arnold, [illegible] Ave., New York.

# as Holiday Servers

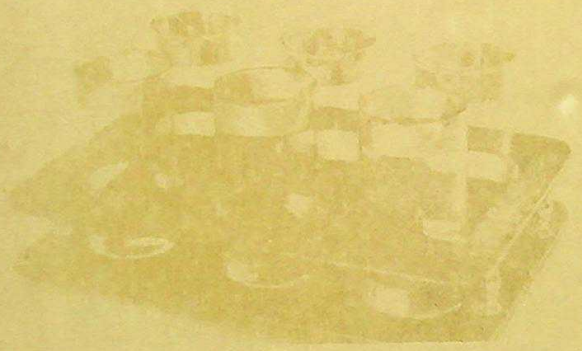

Tangue pitcher and tray holds six 12-ounce glasses with wide [illegible]. Tray also comes in black or ruby. The set [illegible] an exciting gift or house gift. High style is [illegible] 225 Fifth Ave., New York.

Ceramic tureen holds hot [illegible]. Tray is 12 in. dia. Fish motifs decorate lid and edge of tray. For seafood bisques, stews, soups. Fluted tureen with ladle and tray is $20. From Marsh Industries, 221 E. [illegible], N. Los Angeles.

Plastic lace tablecloth, 54 [illegible] round or [illegible] $2.50. 54 [illegible] 72" oblong, $5. Frenndl [illegible] 210 Fifth Ave., N.Y.

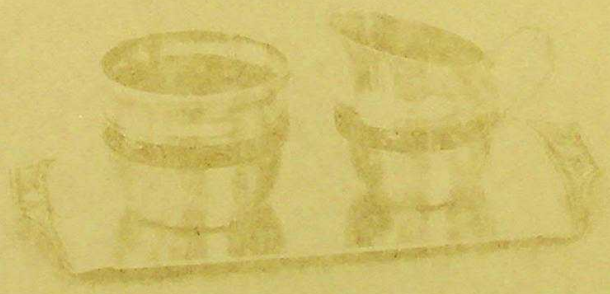

Pewter sugar and creamer [illegible] for entertaining at any meal. Imported from Norway, the classic design lends itself to traditional or contemporary [illegible] $19.50. Hemissen Imports, Box [illegible], [illegible] Ave.

Karlsbad Kaffee Maschine of Bavarian china with filter. Makes 1 cups. $15. Spiegel X, 1133 B'dwy., N.Y.C.

D1-553.1

30A. "Cameo" box centers a gilt-framed classic portrait on its velvet upholstered door. Inside are four velvet-lined drawers. By Royal London, Inc. Walnut wood/gold velvet. 20.00 30B. Dainty musical box in sculptured and painted wood. With self-rising tray. Velvet-lined and mirrored. By Kellerman. Antique gold or Walnut. 7.00 30C. "Imperial" jewel cabinet stores all her valuables in splendor. Especially tall, with fittings for necklaces, pins, rings and earrings. Velvet-lined and mirrored. By Kellerman. Rich Walnut wood. 34.00 Smart serving trays that spell out with their compartments what's being offered to eat. Cleverness from Custom Mdse. Corp. c/o Ted Arnold. Yellow or Orange. 30D. Nuts. 20" x 8". 5.00 30E. Dip. 20½" x 13½" 7.00 30F. Tall wooden pepper mill for that gourmet accent. By Shafford. Orange, Green, Yellow or Red. 10.00 Cheery coffee set of ceramic earthenware. Hand painted with a full-blooming flower on each pretty piece. By Shafford. Orange, Red or Yellow on White. 30G. 6-cup coffee pot, 5.00 30H. Covered sugar and creamer in pot and jug shapes. 3.00 30J. 4 mugs in a set 6.00 30K. Cutting board in tasty apple shape is wood inset with ceramic. Complete with knife. By Shafford. Orange, Yellow or Green. 5.00 30L. Gracefully curved salad bowl and 4 serving bowls in molded plastic. Servers are unusual, too. By Rubel. Smoke only. Boxed as a 7 piece set. 7.50 Trivets with a difference are enameled wrought iron in attractive shapes. By Seymour Mann Imports. Orange/red or Peacock. 2.50 each. 30M. Rooster. 30N. Mushroom. 30P. Butterfly. 30Q. "Fair Play." A perfect desktop paperweight that doubles as dice game. In

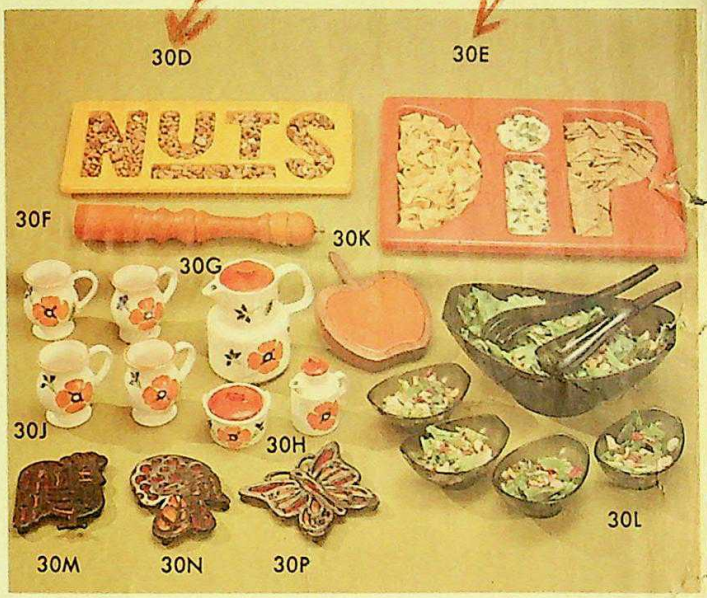


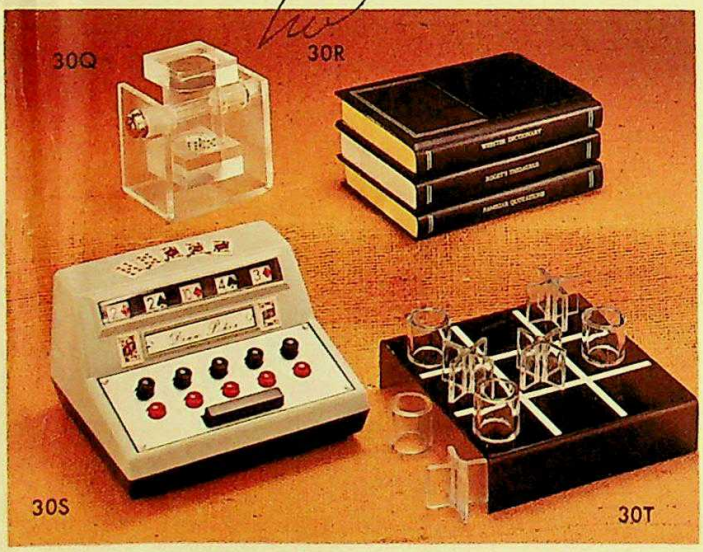


attractive lucite shape. By Kanro. 10.00 30R. "The Book Trio" for everyone's desk. Dictionary, Thesaurus and Familiar Quotations in tooled black leatherette bindings. By Colton Lewis. 6.00 set. 30S. "Draw Poker." A really great game. Small enough for traveling. Battery operated (batteries incl.) By Essay. c/o Lilibet. 20.00 30T. Tic Tac Toe Game is handsome as a display piece. Plays well, too. Sculptured acrylic in Smoke and Clear. By Colton Lewis. 5.00 31A. Our 5-branch tree holds either candles or flowers. Looks enchanting either way. Of mercury silver electro-plated ceramic. By Dorothy Thorpe. c/o Rockford International. 7.50 31B. Wine basket of carefully wrought non-tarnishable silver wire. For special

# SWEET YOUNG THINGS

Raleigh News & Observer
Recd 11/71
p. 28

13.50 **28O.** Mini ice bucket with silver plated rim is diamond cut. By William Adams. 10.00 **28P.** Mini ice tongs are silver plated and boxed. 5.00 **28R.** Beverage pitcher with an heirloom look has a lovely silver plated cover and handle. By William Adams. 16.50 **28S.** Candy dish is gracefully footed, with an especially nice top. Hand cut crystal by Miller Woods. 12.50 **28T.** Small silver plate rimmed dish for jam or condiments. With own spoon server. From Raimond Silver. 5.00 **28U.** Festive salad bowl with silver plated rim and servers. By Raimond Silver. 10.00 **28V.** 3-part relish dish with silver-plate rim and 3 servers. To beautify a buffet. By William Adams. 10.00 **29A.** This jewel box is a snug Swiss chalet when closed. Open, it reveals a ballerina who dances to a pretty tune. By Flair Imports. 12.00 **29B.** This night light hides in a wicker flower basket. Switch makes unplugging unnecessary. Red roses or assorted poises. By Flower Modes. 5.00 **29C.** "A Doll A Day", 7 little rag dolls, snuggled in a wicker basket. From I. S. Sutton. 5.00 **29D.** Set for the youngest organization lady. Decorated with flowers and a flowering-haired mermaid. Phone book, photo album, diary and matching pen. From A. D. Sutton. 4.00 set. (boxed) Natural Soaps From Caswell-Massey, Ltd. **29E.** Spanish tomato Juice Soap. Set of 3 plump red soaps in aspic-like molds. 4.50 **29F.** Violet Soap From France. Set of 3 scented soaps in a dear miniature hat box. 4.50 **29G.** The Connoisseur Sampler. The finest of the fine in 7 intriguing scents and shapes. Boxed to give. 9.75 **29H.** Lemon Juice Soap From France. Set of 3 bath size lemon shaped soaps. Boxed. 5.00 **29J.** Cucumber Soap. Set of 3 green bath ovals, so cool and delicious. 5.00

D7/553.1 p.28
COLONIAL GARDEN KITCHENS
REC'D. 6-20-75

## FAMOUS ENGLISH BISCUITS

The British are justifiably proud of these world famous biscuits, and you will be too. Crunchy, crisp WHEATMEAL BISCUIT has a distinctive wheaty flavor. It's an ideal tea biscuit or nutritious between-meal pick-up. TABLE WATER BISCUIT is the thin, crisp and perfect cracker for all cheeses and soups. Both in airtight tins.

1204—Wheatmeal Biscuits, 15 oz. .....$2.25
1205—Table Water Biscuits, 12 oz. .....$2.25

## FLAMING ENTREES and DESSERTS

Festive Flambe flames food instantly. New, fuss-free "sure fire" key to success in achieving dramatic, flavorful results in flaming desserts. Used by leading chefs. Rich, concentrated brandy flavor. Recipes incl. (4 oz.) bottle.

1939—Flambe Fanfare .....$1.98

## CREPES SUZETTE AU GRAND MARNIER

The ultimate in elegant desserts! Luscious thin French-style dessert pancakes, drenched in traditional orange liqueur. Just heat in butter and serve — or for an extra special touch, add warm brandy (or our own Flambe Fanfare) and flame. In only a few seconds you can have a truly magnificent dessert.

3815—Jar of 10 Crepes .....$3.95

## SEED TREATS

**SUNFLOWER SEEDS** Hulled, cleaned, sun-dried whole kernels. Eat right from the package or sprinkle on salads and desserts.

3540—1 lb. tin .....$1.35

**SESAME SEEDS** Choice quality, untoasted. For breads, fish, poultry, cereals, cheese, etc. Less than 1/5 the usual spice counter price!

1726—Full pound .....$1.00 3 for $2.75

**PUMPKIN SEEDS** Largest whole kernels, hulled, sun-dried. Moist-fresh, not fried or salted. Use as TV nibbles, or welcome change from pretzels, chips.

3510—14 oz. tin .....$1.89

## ASSORTED HERB TEA BAGS

Enjoy the pleasure of a different tea each day with this zestful, flavorful variety. Includes marvelously minty Peppermint Tea . . . fruity, aromatic Rose Hips Tea . . . hearty, refreshing Roseamint Tea (special blend of rose hips, strawberry leaves, alfalfa seeds & leaves, lemon verbana) . . . and distinctively different Gossip Tea (delightful blend of rose hips, orange peel, clove and hibiscus flower).

5010—Box of 32 assorted tea bags .....$1.25

## DIJON MUSTARD

Piquant natural condiment that adds so much to a salad, fish or poultry. Add extra glamour to steak, burgers by spreading on a thin layer before broiling. In traditional ceramic crock with lovely hand painted floral motif.

1669—5½ oz. crock .....$4.50

## ESCARGOTS? Mais Oui!

France's finest snails and all the accessories to fix and serve them in the classic Parisian manner. Bake tender French snails in our authentic serving plates—top with melted butter and a fragrant sprinkling of our imported French "Herbs for Snails." **C'est formidable!** We offer plump snails of the grade demanded by the leading Parisian restaurateurs, ready to fill porcelain snail shells, authentic snail forks and serving tongs for each guest.

2466—6-cup-snail plates (oven-proof china) ..... Set of 4 $6.95
3706—Porcelain snail shells .... Dozen $4.50
3711—Snail tongs ..... Set of 4 $4.50
3712—Snail forks ..... Set of 4 $3.75
1410—24 snails, 24 reusable natural snail shells .....$3.98
1411—Tin of 24 snails .....$3.98
3799—Herbs for Snails (1¼ oz.) .....$1.39



## AMARETTINI FROM ITALY

These wonderful Italian cookies are light as air, crisp as a cracker and a little bigger than an almond. Some say they have an almond flavor. Some, anisette licious." Made of natural cot kernel paste and egg a tin. Delightfully packe tight tin for freshness.

1242—Decorated Tin—1 p

**SLICED INDIAN MANGO** ing treat from the sunny sweet and deliciously d serve plain, add to your fa serve with other fruits for Distinctive among fruits fe fine golden texture!

3821 —1 Lb. 3 oz. Can .....

## DANISH ALL-BUTT

Scandinavi cuits from ish, Swedi Finnish only with and rich i mark's mo first taste, ing into a chorus of "Th a DANE!" Packed to prote and crispness.

1212—Full Pound .....

**GINGER COOKIES** Rare centuries' old French choice crystallized ginger, eggs and pure creamery 1092— 9 oz. Gift Tin .....

## SOUR CREAM POUND CAKE and COCONUT MACAROONS

A famous bakery vacuum packs these treats for unexpected guests or family. SOUR CAKE—has prize winning thing extra special serve and topping. COCONU rich chewy treats with hon flavor and aroma.

1254—Sour Cream Pound (12 oz. tin) .....
1203—Coconut Macaroon



## CLASSIC MEISSEN SALT SHAKER and PEPPER MILL

Treasured "Blue Onion" brings the grace and elegance of old-world tradition to your dining table. A lovely way to serve salt and pepper—in sparkling white porcelain, with familiar cobalt blue design. Mill adjusts for fine or coarse grind . . . precision mechanism guaranteed for 5 years. (7" h.)

3772—Meissen Salt & Pepper Set .....$15.95



## LUCITE "BAGEL CRADLE"

This sparkling holder is clear as glass, sure to be loved by bagel fans everywhere! Doughnuts and sweet rolls will nest in it nicely, and you couldn't find a prettier way to serve English muffins! Use it any time of day from breakfast to midnight snack. Tough "invisible" Lucite gives many years of gracious service. Measures 6 bagels long!

3781—Bagel Cradle (10"x4"x3½") .....$5.95

## BUFFET CHEF

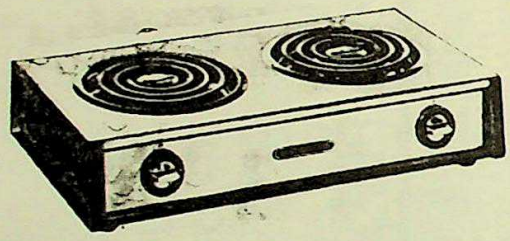

*Deluxe portable table range for extra cooking convenience!*

Cook with a flair right at the table . . . your kitchen stays cool and food can be served piping hot! Quick family meals are fun to prepare this way. And, for fancy entertaining, use this handy tabletop range for Oriental dishes, fondues, your own special omelets! Infinite heat control **maintains** the exact temperature you need, tubular elements heat **instantly**, and the removable drip pans make cleaning so easy! Brushed-chrome body with attractive black trim. U.L. approved.

2852—Double Buffet Chef (18¼" x 10¼) ....$34.95
2853—Single Buffet Chef (9¾" x 10¼") .....$21.95


COLONIAL GARDEN Kitchens
**270 WEST MERRICK RD.**
**VALLEY STREAM, N.Y. 11582**


**If Undeliverable, Do Not Return**

BULK RATE
U.S. POSTAGE
**PAID**
BARTH-SPENCER CORPORATION

Rec'd. 6-20-75

p. 82

COLONIAL GARDEN Kitchens

# FREE with every order

## Fancy Spiral Slicer



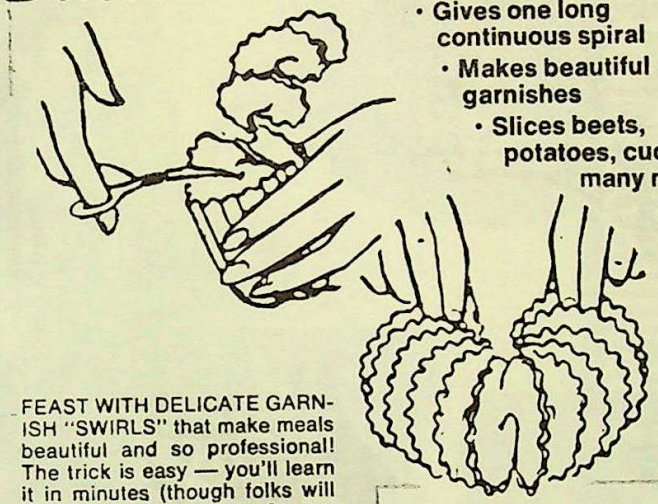

- **Gives one long continuous spiral**
- **Makes beautiful garnishes**
- **Slices beets, potatoes, cucumbers, many more**

FEAST WITH DELICATE GARNISH "SWIRLS" that make meals beautiful and so professional! The trick is easy — you'll learn it in minutes (though folks will think you spent years of practice)! Simply hold a potato (or other vegetable) *from the bottom*, then insert the small threaded rod. Turn the steel cutting blade clockwise and in seconds you'll have a lovely spiral to decorate platters or turn a salad into an inspiration! The simplest dishes will take on a beauty to match the finest French cuisine. It even makes thin individual slices when your recipe calls for them! An ingenious utensil to help you dazzle guests and provide a real appetite-spark for family meals! Instructions included.

TO GET YOUR FREE FANCY SPIRAL SLICER, SEND AN ORDER FOR ANY MERCHANDISE IN THIS CATALOG, BUT . . . DO IT NOW . . .

FREE GIFT OFFER ENDS JUNE 30, 1974.

**(SEE INSIDE for an EXTRA FREE GIFT OFFER!)**

XTRA GIFT!
more)

rizer"

es, swirls, curls
ates, peels, shreds
corates, strings,
ips



er of all of them, to
, most imaginative
rals (like your free
goodness, it does
f the "glamorizer"
have a chef's tool
lequin designs on
es and peel fruits.
ck into handle —
s, shred cabbage,
simple to use —
e meals you serve
y!

order.
XTRA GIFT (in
if your order

S JUNE 30, '74

Received June 20, 1975

# COLONIAL GARDEN Kitchens

Authentic American Regional and Continental
FOODS · GIFTS
GOURMET COOKWARE

Now it's easier than ever to order

master charge

BANKAMERICARD

D7/553.1

# e als
# Etwas Ordnung
# men-
# bringen

astständer

p. 258 SW
SCHÖNER
WOHNEN

JUNE, 1981

Unbezweifelbar nützlich, klar in der Form und nur ganze 25 Pennies teuer – das veranlaßte in den sechziger Jahren Michael Boys, den ersten Toastständer zu kaufen. Er kam auf den Frühstücks- und Teetisch des Londoner Fotografen, und als er wenig später zwei Ständer

*Erstaunlich, wieviel Phantasie die Porzellanmacher in ein so alltägliches Tischrequisit investiert haben*

p. 258 SW SCHÖNER WOHNEN JUNE, 1981

ichael Boys

# ch wollte als erster etwas Ordnung ins Formen-chaos bringen

Toastständer

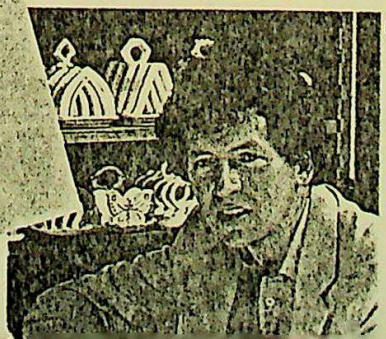

U

nbe
nü
der
nur g.

nies teuer – das

D7.553.1

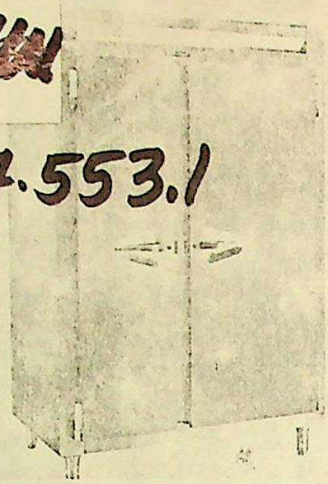

**Refrigerator/freezer** ● The Dual Saver, model RDT 2-32 DUT, offers reductions in space and energy consumption. It's ⅔ refrigerator and ⅓ freezer; has no interior coils, thereby allowing full utilization of interior space.
Circle No. 167 on Reader Inquiry Card



**Tea** ● Tender Leaf Tea from Nabisco Brands is available wrapped or unwrapped, 100 per pack, 10 packs per case.
Circle No. 168 on Reader Inquiry Card



**Cake packages** ● Nine sizes of display cake packages are available from Ecko Products. Foil based cake packages with clear plastic domes allow baking, decorating and merchandising in one package.
Circle No. 169 on Reader Inquiry Card

Does consistent, well-mixed drinks from unsweetened powder tea. The Model PT1 allows tea strength to be set at various desired ratios. Features continuous flow operation and fills extra large cups/glasses up to eight inches high. The unit can be filled either by attaching the original glass jar to the dispenser or by pouring instant tea into the unit's hopper. Requires only connection to a water line and electrical outlet to be fully operational.
Circle No. 170 on Reader Inquiry Card

APRIL, 1982

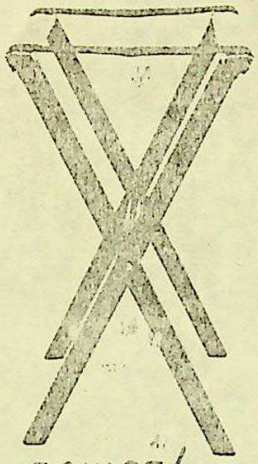

p. 46

FAST SERVICE/ FAMILY RESTAURANTS

**Tray stand** ● Aris Manufacturing offers a low-cost, high-quality wood tray stand, lightweight for carrying and setup yet strong enough to support up to 500 lbs.
Circle No. 171 on Reader Inquiry Card

**Hot Dog tray** ● The Prince Castle "dog-eez" Hot Dog Make-up Tray holds seven hot dogs in buns in a face up position so condiments can be spread quickly. Made of lightweight stainless steel for quick easy cleanups. Designed for easy stacking and storage of more than one tray.
Circle No. 172 on Reader Inquiry Card

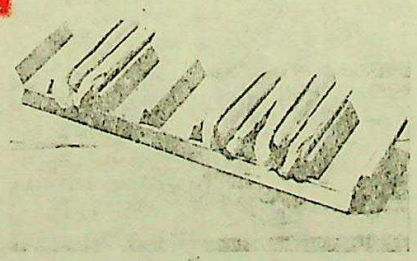



**Mop wringer** ● White's #2000 squeeze wringer features large drain openings for better water runoff; has reinforced ribs in front, side and back; made of steel with electroplated finish.
Circle No. 173 on Reader Inquiry Card

**Salad bar** ● The portable salad bar by Continental Plastics is available in four and six foot models with sliding door and drain pan shelf. Serving area supports up to 300 lbs. Two adjustable sneeze guards.
Circle No. 174 on Reader Inquiry Card

**Hot fudge sauce** ● Deluxe Chocolate-flavored Hot Fudge from RICHardson's offers a semi-sweet, full bodied taste; may be heated and poured over ice cream for a consistently excellent appearance.
Circle No. 175 on Reader Inquiry Card

**Fruit cocktail** ● Diced peaches and pears, whole seedless grapes, pineapple segments and halved maraschino cherries are blended together in Libby's Fruit Cocktail. Product features layer packing to assure even distribution of fruit. Packed in either heavy or lite syrups, water or in the Libby's Lite pack with real fruit juice from concentrates.
Circle No. 176 on Reader Inquiry Card

*Set a picture-perfect party table — over and over again!*

# Party Case™

*Service for 12 in soft pastels or bright primary colors*

Rec'd. 7-29-85

D7.5531

Have you ever set a party table so pretty you hated to throw the party goods away? Now you won't have to — because your Party Case™ service for 12 is reusable!

60 sturdy, washable plastic plates, glasses, knives, forks and spoons are packed in a strong storage/carrying case — and every single piece is microwave safe, washes easily on the top rack of your dishwasher.

Order now and be ready for the next picnic, pool party, barbecue, anniversary, shower or birthday. Expecting a crowd? *Save when you order two!* From Oak Hill.

Primaries include red, blue, green and yellow.

*Set includes 12 each:*

- 12" divided plates
- 10 oz. tumblers
- Knives, forks, spoons

JUST $12.95

60-piece Set

*SAVE!*

Additionals only $10.95

nclude
ink,
r,
ue.

*on other side.*

CHARGE IT!

VISA

MASTERCARD

© 1985 Carol Wright Sales, Inc., 3601 N.W. 15th St., P.O. Box 8503, Lincoln, NE 68544

D7/553

Set a pretty party

# Party Case™ by Oak Hill

In your choice of soft pastels or bright primary colors

**Why waste money on paper partyware you use just once, then throw away – when for just a dollar or two more you can buy a pretty Party Case™ complete with knives, forks, spoons, plates and glasses you can use over and over again?**

**Each sturdy cardboard storage/carrying case contains a dozen each of –**

- **12" divided plates**
- **10 oz. tumblers**
- **Knives, forks, spoons**

**All made of sturdy, washable polystyrene that's microwave and dishwasher safe!**

**FOR Picnics • Poolside • Barbecues • Parties • Weddings • Showers • Anniversaries**

**JUST $12.95 Set**
***SAVE!***
**Each additional set $10.95**

***Pastels* include lavender, light blue, pink, white**

***Primaries* include blue, yellow, red, green**

**CAROL WRIGHT GIFTS,** Dept. G546
3601 N.W. 15th Street, P.O. Box 8504, Lincoln, NE 68544

Cut Here

Send me_____ (How many?) PARTY CASES(s)™.
☐ Only $12.95 plus $2.95 shipping & handling (total $15.90) for one set.
☐ **SAVE $2.00!** Each additional set just $10.95 plus $2.95 shipping & handling (total $13.90).

_____ Pastels (#K12A) (How many sets?) _____ Primaries (#K12B) (How many sets?)

Enclosed is $_____. Please make check or money order payable to Carol Wright Gifts. Thank you.

Charge my ☐ MasterCard ☐ VISA

Account No. ☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐

Card Expires Month Year ☐☐☐☐

Signature

☐ Mrs. ☐ Ms ☐ Mr. ☐ Miss

NAME (please print)

Received July 29, 1985

ADDRESS Apt.

CITY STATE ZIP

CT and NE residents please add sales tax. Please allow 4 to 6 weeks for shipment.

Carol Wright's®

**UNCONDITIONAL GUARANTEE**

Whenever you buy anything from us, you must be satisfied! Or return your purchase any time up to 1 year for a full refund.

G24

D7.553.1



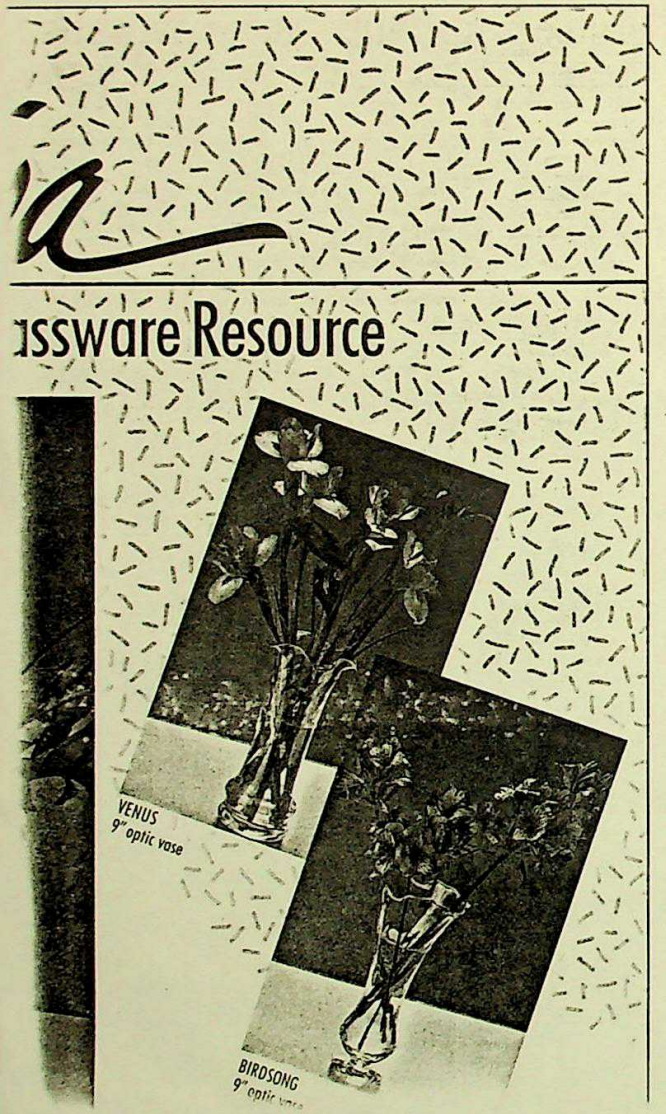




HFD PAGE 43
OCT. 19, 1987

Sweeping Changes' Mealtime Adventure sets include characters and stories in addition to dinnerware.

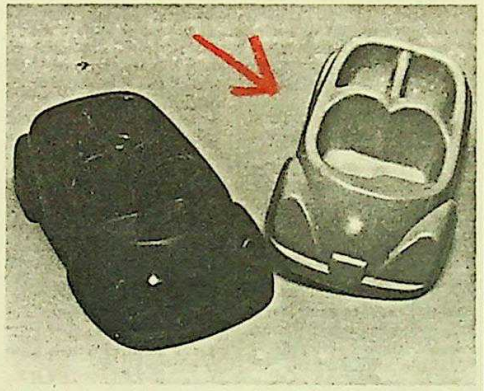

Anacapa's racy roadster speeds onto the juvenile tabletop scene with a suggested retail price of $10.

# New twist for tots' tableware

## *Sculpted miniature replicas of favorite toys bow*

By Lori Krebel

Some tabletop resources are adding a new dimension — literally — to their fall juvenile dinnerware introductions.

A new dinnerware concept for kids is transforming regular, flat plates into replicas of boats, planes and race cars, and revitalizing the juvenile category as a whole with newfound consumer and retail excitement.

A number of resources have great expectations for this type of tabletop for tots, which they report has sparked significant interest from retailers as a way to perk up the significant but stabilizing juvenile tabletop category.

Anacapa introduced a prototype of its realistic-looking roadster at the April housewares show, and met with phenomenal interest from retailers, according to the company. Walter Fleisher is combining the success of its Disney licensing program and sculpted dinnerware with the introduction of its Mickey Mouse head-shaped plate.

Peco has also broadened its assortment with an accurate miniature airplane and a race car, and a new resource in the category, Sweeping Changes, has launched Mealtime Adventure, a tabletop set for toddlers complete with storybook character and setting.

"3-D is the trend for progressive companies," said Dick Saklad, president of Walter Fleisher Co. "People are getting tired of round plates. With so many patterns available, everything is beginning to look alike."

"Licensed Disney products represent 60 to 70 percent of our business in melamine," Saklad said. "The Mickey-head shaped plate has three compartments (two ears, one face), and is airbrushed to give Mickey's face depth and texture."

Paul Wang, marketing vice president for Peco, believes that sculpture-like dinnerware will give added accent to the established juvenile tabletop market.

"Consumers will still go with the basic dinnerware sets," said Wang. "But the three-dimensional adds more variety. In the future these entrants will be like regular dinnerware, a day-in, day-out business." Peco's car and plane dinnerware is available in pastel and primary colors.

Anacapa's national sales manager, Tom Ghormley, believes that dinnerware introductions in the form of tots' favorite toys, such as its roadster, will find and fill a niche in the market, but he's hopeful that other manufacturers won't hurry into this mini-segment.

"I certainly think three-dimensional dinnerware is going to have a place in the market," said Ghormley. "It's new and whimsical. But there won't be the mad rush to enter the category as there was to enter

(Continued on page 45)

# Hutschenreuther launches gallery on B. Altman flagship, a US first

NEW YORK — Hutschenreuther has opened its first U.S. department store gallery at B. Altman's, kicking off a long-term, in-store shop plan that the German manufacturer hopes will result in at least four more shops by next year.

With in-store galleries, the $245 million dinnerware giant believes it can introduce the galleries," Dietsch said. "We want them to be the same everywhere, to uphold the Hutschenreuther image that is immediately visible and identifiable as a quality product in design, craftsmanship and new materials. The key to our future success here is to make it visible that we are the manufacturer of quality merchandise."

stores throughout the South, and over 800 others are in operation all over the world.

Cleverley Stone, director of bridal and gift registration at B. Altman's, noted that training of their salespeople is a key element in Altman's strategy. "Since we are in New York, we have access to the showrooms," said Stone.

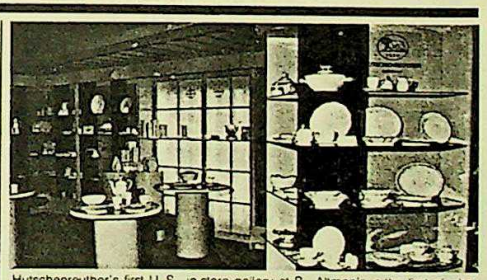

Hutschenreuther's first U.S. in-store gallery at B. Altman's is the first of what the company believes will be many shops in coming years.

another copy in D7-5

Plätables

# ...ZA / SNACK PLATE

D7.553.1

PIZZA PLATE

## MAMA MIA!

# NOW THAT'S THE WAY TO EAT A PIZZA!

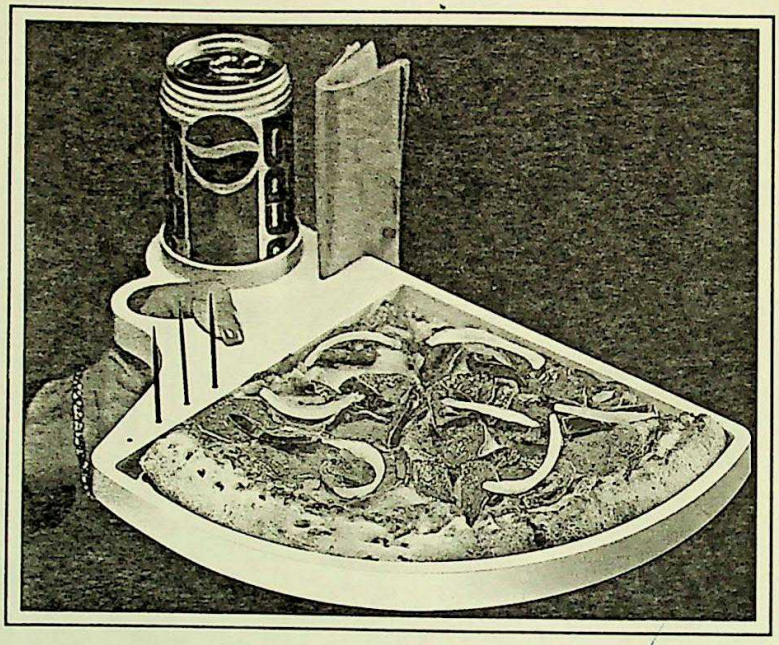

### PERFECT FOR:

- Pizza Parties
- Snacking Anywhere
- Birthday Parties
- Watching Television
- Pizza Stores
- Ad Speciality Item
- Premium Item
- Kids Pizza Parties

***Enjoy A Hot Tasty Pizza & Beverage Anywhere***

ADVERTISEMENT
REC'D 6/28/93

### FEATURES INCLUDE:

Compartment for 2 slices of a large 16" pizza
Spill-Proof beverage receptacle that accommodates stemware, bottles, cans , cups and tumblers..
Napkin holder
Decorative & toothpick holders

### OPTIONAL ACCESSORIES

Matching cups & tumblers
Decorative picks
4 color paper inserts in various themes with a blank space available to print or write in event, occasion or name.

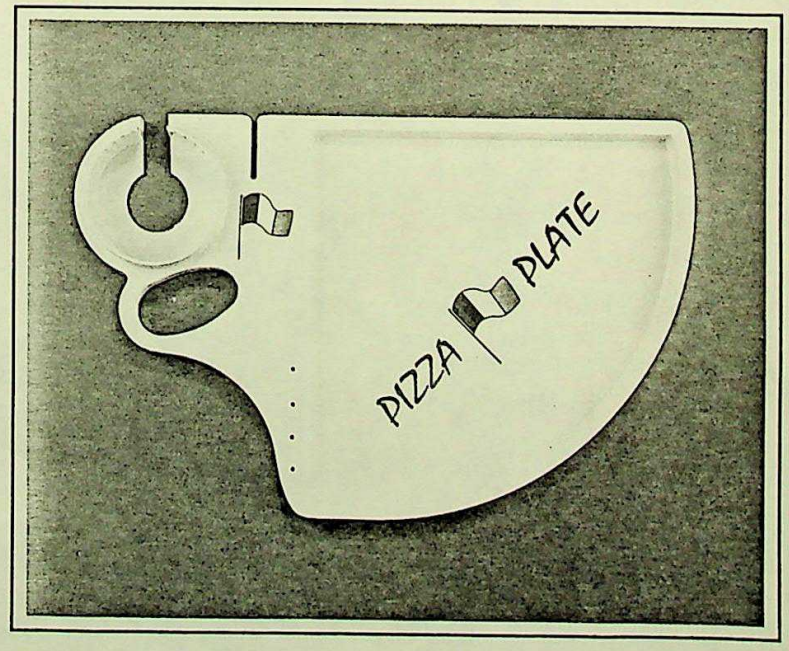


**E.D.T. Products, Inc. • P.O. Box 7667 • Naples, FL 33941 • (813) 643-5125 • (800) 833-0696 • Fax (813) 649-4129**
**U.S. and Internationational Patents Pending**

D7/553.2 92
UXF
#209,234 BRITAIN

65 1924

234 (1)

4

2 sheets

ATION

Jan. 10, 1924

SHEET 1

2 SHEETS

SHEET 2

44/14

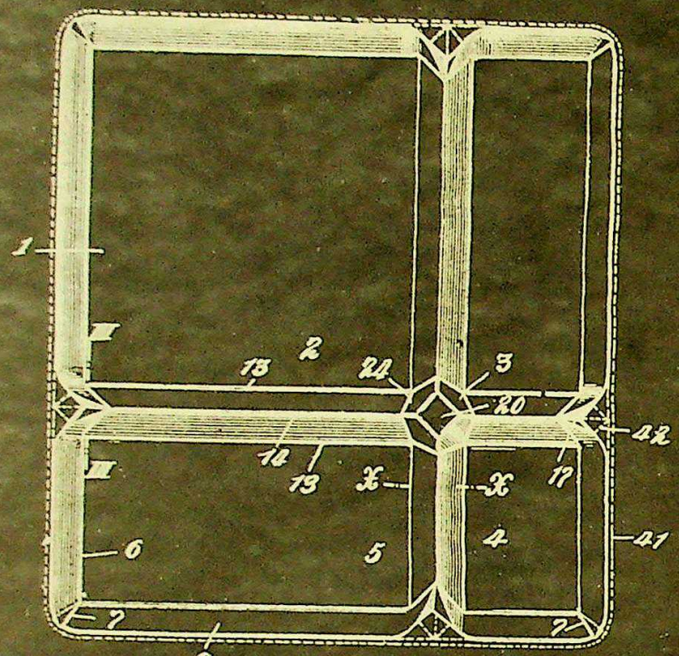


Fig. 1.




Fig. 2.




Fig. 3.




Fig. 4.




Fig. 5




Fig. 6

Fig. 7.

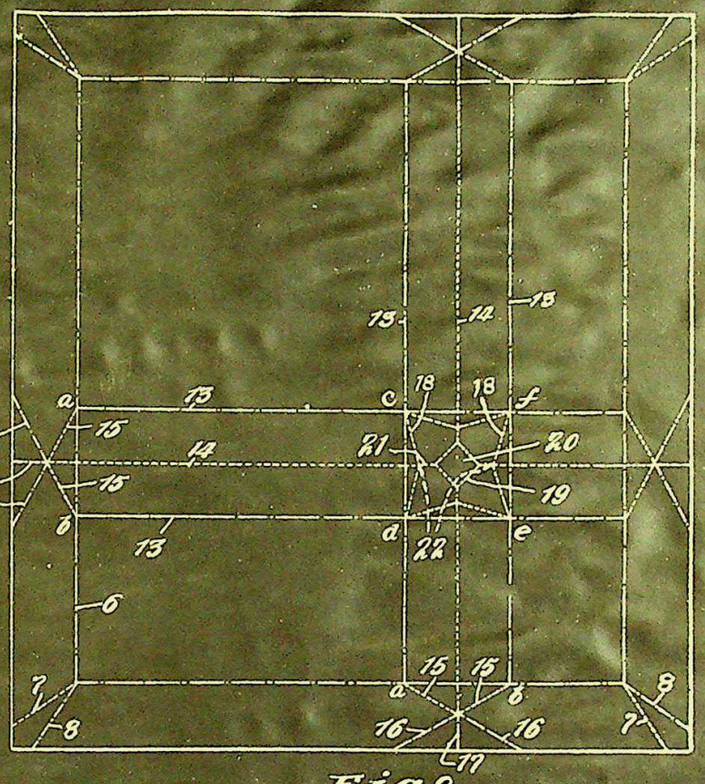


Fig. 8.

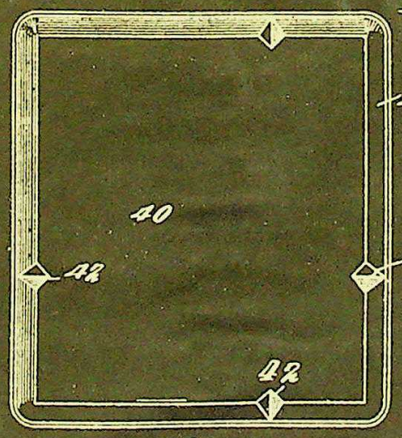


Fig. 9.

Fig. 10.

Fig. 11.

[This Drawing is a reproduction of the Original on a reduced scale.]

Malby & Sons, Photo-Litho

from the bottom of the box into an inverted V-shape to form individual egg compartments. However, in order to provide for intersection of the partitions and connection thereof with the side walls, there had to be much slotting and cutting of the material, the necessity for which is obviated in the present invention.

In order that the invention may be more fully understood and readily carried into effect, the same will now be described with reference to the accompanying drawings illustrating a preferred embodiment thereof, and a modified construction. It will be understood, however, that the invention is not limited to this embodiment nor is it limited to serving dishes or receptacles for food. In these drawings:

Figure 1 is a plan view of the container, the holding tray being shown in dotted lines. Figure 2 is a transverse section through the container and tray taken along the line of one of the partitions. Figure 3 is a section on line III—III of Figure 1. Figure 4 shows the side wall of the receptacle at a point where the partition joins it, the parts being partly folded. Figures 5, 6 and 7 are detail plan views showing steps in forming a corner of the side wall. Figure 8 is a plan view of the blank scored for folding, the dotted lines indicating the positions of what may be termed positive folds where the material is to be folded back upon itself or away from the line so as to provide an apex or edge; while the dot and dash lines indicate negative folds where the paper is to be folded so as to provide a crease or groove with reference to the upper surface of the material. Figure 9 is a plan view of the permanent tray or holder. Figure 10 is a vertical section through the receptacle on the line X—X of Figure 1. Figure 11 is a fragmentary view of a modified form of blank.

The numeral 1 designates the temporary container which is preferably formed of paper or other light and cheap material capable of being folded. This material is cut in the form of a blank of suitable shape which may be a simple rectangle, as shown in Figure 8. If it is desired to provide a receptacle having a number of compartments such as one large compartment 2 and three small compartments 3, 4 and 5 respectively, the blank may be folded as indicated by the lines in Figure 8, the blank being preferably scored along these lines in the proper direction so as to facilitate folding. The folding may be accomplished by hand or suitable machinery, preferably the latter. In order to form the side walls, the blank is scored along the lines 6 parallel to the edges and at each corner along divergent lines 7 and 8. The edge portions of the blank outside of the lines 6 are bent upwardly to form the side walls 9, a positive fold being made at each corner along the line 7 and a negative fold along the line 8. In this way a plait 10 is formed at the corner, as shown in Figure 5 ,the end portion 11 projecting beyond the upturned walls. This end portion is then folded or rolled over as indicated at 12 in Figures 6 and 7 and serves as a lock for preventing the plait from opening. In this way the side walls are retained in upturned position. Preferably the side walls are not turned up at right angles to the bottom but flare outwardly, the corners geing more or less rounded as indicated in Figures 1 and 6.

When it is desired to provide compartments in the receptacle, the blank will be folded along transverse lines, two negative folds being made along spaced parallel lines, at 13 in Figure 8, and a positive fold being made along an intermediate line 14. Where the partition joins the side walls, plaits are formed by folding the paper entirely over upon itself along the section *a—b* of the line 6 and by making positive folds along the lines 15 and 16 and a negative fold along the line 17. These parts are then folded as indicated in Figures 1, 2, 3 and 4, resulting in the formation of a raised V-shaped partition extending across the receptacle and joining the side walls thereof. Where it is desired to provide more than two compartments, this may be accomplished by providing intersecting partitions as in the particular embodiment of the invention illustrated. The intersection of the partitions is preferably constructed as follows:

The paper is folded over upon itself along the portions *c, d—d, e—e, f—f, c*, respectively, of the intersecting pairs of lines 13 and sharp positive folds are made along the short line 18. The paper is also given slight positive folds along the lines 19 forming the sides of a small square 20, arranged diagonally relatively to the partitions. The paper is also folded slightly in a positive manner along the short lines 21 extending between the points of intersection 22 of adjacent pairs of lines 18 and the corners of the square 20. In this way, it will be seen that plaits 23 are formed over the adjacent ends of the partitions and a central box-like construction is provided having the top formed by the square 20, which is slightly raised above the apices of the partitions, the spaces between the square and the partition walls being occupied by the pentagonal portions 24 (Figures 1 and 10).

By forming a pair of intersecting partitions as illustrated, it will be seen that a receptacle having four compartments is provided and that by properly positioning the partitions, the proportions and the relative sizes of the compartments may be varied as desired. The arrangement shown is desirable for a serving dish in that a large compartment 1 is provided, which may be utilized as a plate and in which the *pièce de résistance* may be served, while the various vegetables or condiments may be placed in the smaller compartments. It will be understood, however, that the invention is not limited to the shape, number or arrangement of partitions or compartments shown or to a receptacle of rectangular or other specific configuration.

The receptacle may be used in such manner or may be of such stiff material as to be self supporting, but preferably for the purpose of cheapness, it is formed of light or thin paper and when used as a serving dish may be placed in a permanent tray or holder, such as illustrated in Figure 9, which may be formed of rigid material, such for instance as papier mâché or metal. The tray illustrated comprises a flat bottom 40 having upturned side walls 41 which support the side walls of the receptacle. Preferably also the tray is provided with the abutments 42 which are shaped to engage with the folds at the ends of the partitions so as to firmly support the latter and prevent displacement of the parts of the receptacle. The tray with the paper receptacle therein, it will be seen forms a rigid structure which may be readily handled and which provides the necessary compartments for receiving the various kinds of food. At the same time, the food itself is entirely contained within the paper receptacle and is out of contact with the tray so that the latter does not require washing after each use but may be employed over again by removing the used paper receptacle which may be destroyed and replacing it with a new clean and sanitary receptacle. In this connection, it is important to observe that by forming a paper receptacle in accordance with my invention, a structure is produced which is leak-proof as the paper blank is not cut and there are, therefore, no joints or openings through which leakage can take place. This feature permits the receptacle to be used to hold materials either of a solid or liquid character, for instance, my receptacle will retain without leakage the gravies or juices of meats or vegetables.

The construction of my receptacle from a unitary blank of paper without cuts or openings therein not only prevents leakage as above mentioned, but accomplishes this result without the use of any paste or other fastening means and in fact altogether avoids the use of such agencies. This reduces the cost of manufacture and also obviates the introduction of materials which may be unsanitary such as glue or paste. Of course at times it may be found desirable to provide a separate paper receptacle for each compartment of the permanent tray or holder.

From the foregoing it will be clear that the formation of the receptacle is in keeping with the predetermined idea or plan of furnishing a receptacle for restaurant use and which will itself after the use by a single person compel its discard and thus prevent an unsanitary second use. The material will be of a character, of course, to resist wear and tear in this single service, from the customary employment of knives, forks or other utensils, but preferably not to resist permanently deterioration from the juices or liquids of the foods which would be expected to soften the paper, whereby reuse of the tray is prevented. However, if desired, the receptacle may be formed of paper coated or impregnated with paraffin or other suitable material of a water-proof and sanitary character, which will prevent the paper from softening, stiffen the same, and may if desired be employed to cement the various folds and plaits. The use of paraffin or other coating is not, however, in all cases necessary.

In Figure 11 I have shown a slight modification of my invention in which the blank is notched as at 50 opposite the ends of the partitions, thus eliminating the small triangular folds shown particularly in Figures 3 and 4. I prefer, however, in most cases to retain these folds as they strengthen the receptacle and obviate notching the blank.

Having now particularly described and ascertained the nature of my said invention, and in what manner the same is to be performed, I declare that what I claim is:—

1. A plate, dish or like receptacle formed of relatively flexible non-metallic material such as paper and comprising a bottom, side walls and one or more partitions formed by upwardly folding or doubling the material from the bottom, said partitions being united to the side

walls entirely without cutting the material, for the purpose specified.

2. A receptacle according to Claim 1, combined with a relatively rigid tray, for the purpose specified.

3. A receptacle according to Claim 1, in which the union between a partition and a side wall is formed by folding the portion of the side wall adjacent the end of the partition over upon the end portion of the partition and then outwardly.

4. A receptacle according to Claim 3, in which the partitions are double-walled and of inverted V-shape.

5. A receptacle according to Claim 4, in which side walls on the tray support the side walls of the container, the tray having devices such as lugs adapted to co-operate with the partitions, for the purpose specified.

6. A receptacle according to Claim 3, in which the partitions overlap or intersect, preferably at right angles to one another, to divide the container into compartments.

7. A receptacle according to Claim 6, in which the points on the partition which coincide at the intersection are so located in the length of each partition as to provide predetermined compartments of varying size, certain of the compartments being of such size as to receive and confine articles of food served in an ordinary meal.

8. A receptacle as hereinbefore claimed, in which the container is made of such material as to be self destructible, that is, it requires discarding after a single use.

9. The improved receptacle, substantially as hereinbefore described with reference to the accompanying drawings, for the purpose specified.

Dated this 30th day of October, 1922.

DICKER & POLLAK,
Chartered Patent Agents,
20—23, Holborn, London, E.C. 1,
Agents for the Applicant.

Redhill: Printed for His Majesty's Stationery Office, by Love & Malcomson, Ltd.—1924.

774,273
~~D7/10.E~~ 92
D7/553.2
FRANCE
French
Sept. 17, 1934
1 Sht Dwg.
1934

N° 774.273 M. Terisse Pl. unique

Fig. 1

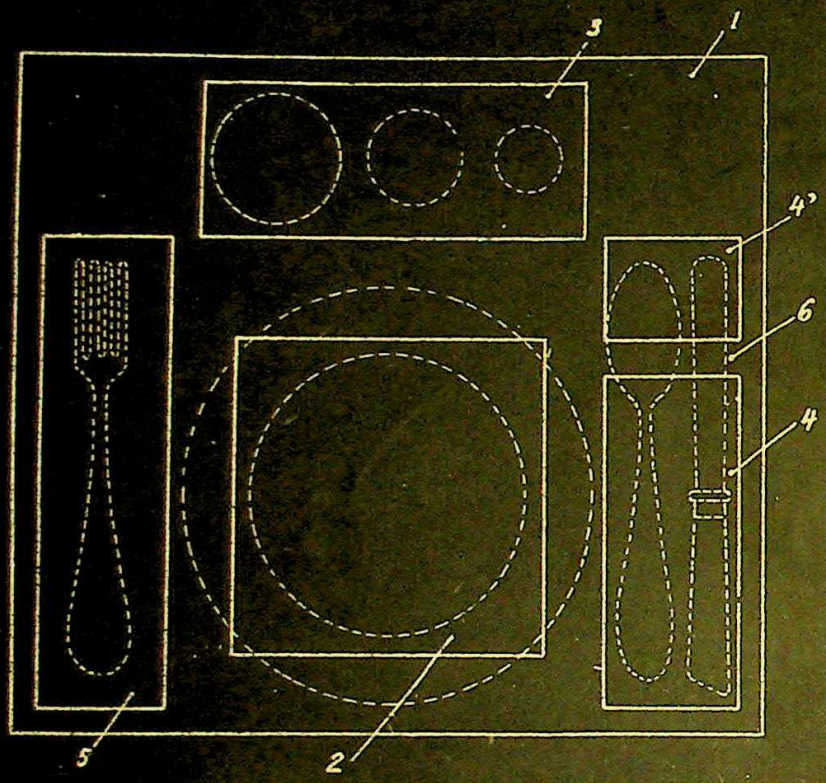


Fig. 2

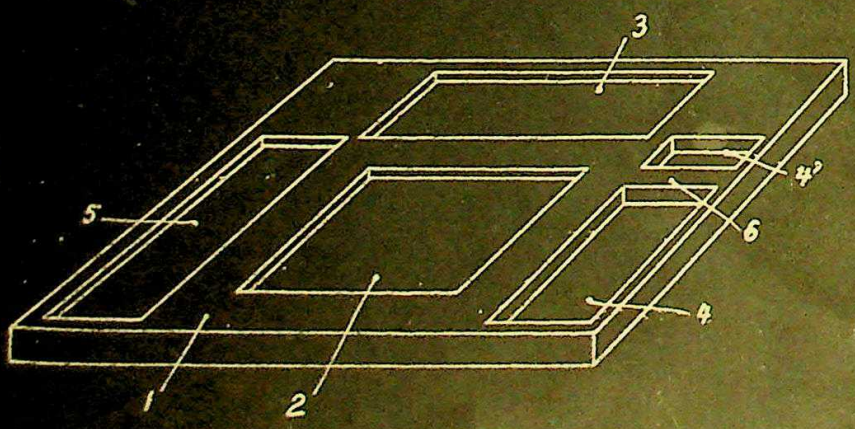

D7/553.2

Page 9 - "Hardware Age" of Aug. 10, 1939.

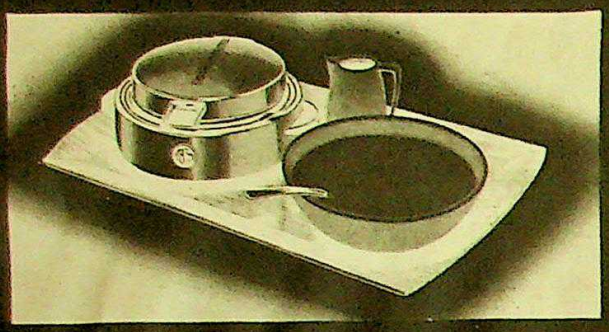

A HIT! Toastmaster's latest, smartest party-promoter—a Waffle Service, complete with tray, Franciscan pottery batter bowl, matching syrup pitcher, lifetime chromium ladle and automatic waffle baker . . . $16.95

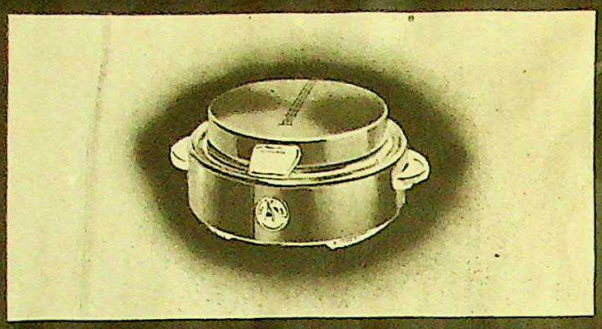

STUNNING new beauty, with all the proved efficiency of this automatic waffle baker. Instant heat control and heavy non-overflow grids insure perfect waffles every time . . . $12.95

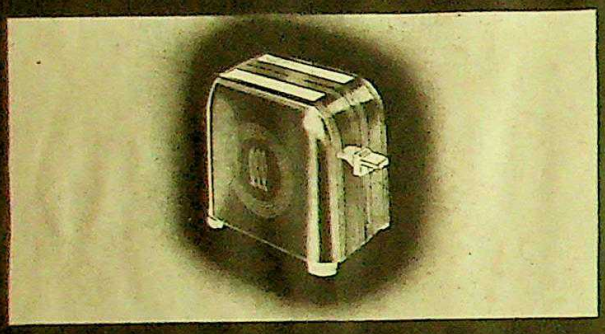

CLICKING wherever it is shown—the Junior non-automatic toaster, with smart new decoration. Toasts two slices, both sides, at once. A finer toaster than many automatic types, at only . . . $7.50

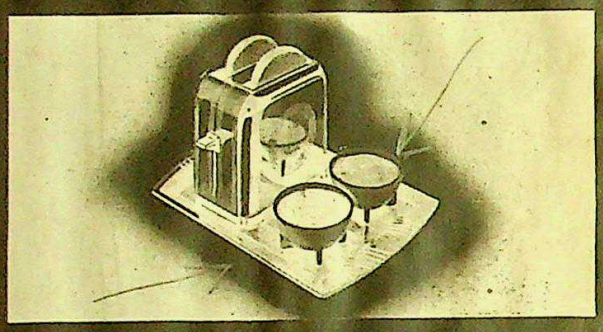

FLASH! A Toastmaster combination at an unheard-of price. The Junior Toast 'n Jam Set, with speedy Junior non-automatic toaster, walnut tray, and Stangl pottery jam dishes . . . $8.50

WATCH sales climb! This De Luxe Toast 'n Jam Set with walnut tray, colorful Stangl pottery dishes, and automatic toaster, costs little more than the toaster alone . . . $17.95

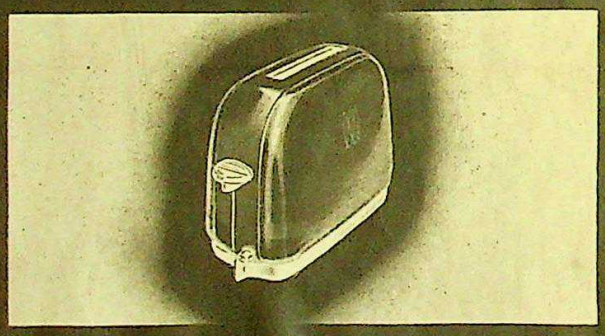

PRICED at an all-time low, raised to an all-time beauty high. The 1-slice automatic operates the same as the 2-slice model. Always a steady seller. Now only . . . $9.95

NEW in beauty, luxurious in every appointment. This De Luxe Hospitality Set has four lap trays, toast-trimmer, Duncan crystal appetizer dishes—and 2-slice automatic toaster . . . $23.95

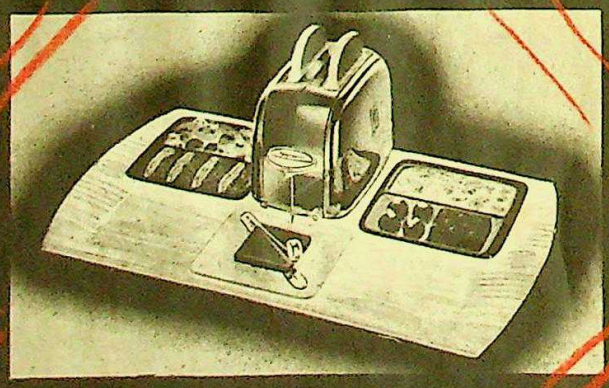

RICH in eye-appeal, with large tray and cutting board, colorful Stangl pottery appetizer dishes, this Standard Hospitality Set offers the utmost in value . . . $19.95

07/553.2

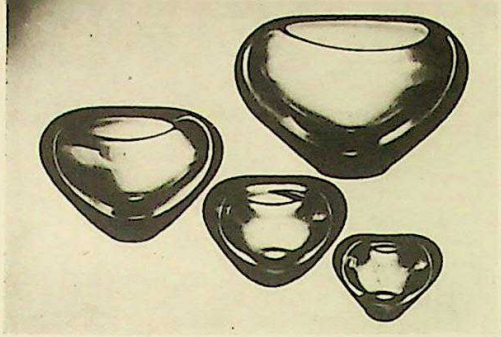

7./8.

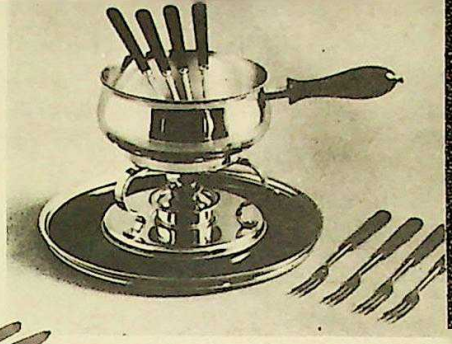

8. THREE-PINT fondu dish of Buenilum has wood handle, is $12.50. Tray is $6.50, four forks, $6. Buehner-Wanner, 66 Ft. Point St., East Norwalk, Conn.

9. ALL-IN-ONE tray with five compartments and two spreaders is $20 retail. Accessory is new from Meiselman Imports, 225 Fifth Ave., New York.

10. WALNUT relish tray has emerald-mist inserts, salt and pepper shakers with formica tops. Rainbow Wood, 12 E. 22nd St., New York. $11.95.

11. CRYSTAL salt and pepper shakers are from line at Dorothy Thorpe, 902 Thompson Ave., Glendale, Calif. Pair at top right is $12.

12. ENGLISH design graces accessories from Mottahedeh, 225 Fifth Ave., New York. Mug, plate, and pitcher are $6, $4.50, and $7.50, respectively; cigarette box and ashtray are $6 and $3, respectively.

13. DELFT BLUE design on ceramic tile enlivens cheese and relish server, $6.50 retail. Available from Jack Orenstein, 225 Fifth Ave., New York.

14. FONDUE forks have rosewood handles stainless steel tines. Imported from West Germany by Milton Gumpert, 5285 W. Pico Blvd., Los Angeles.

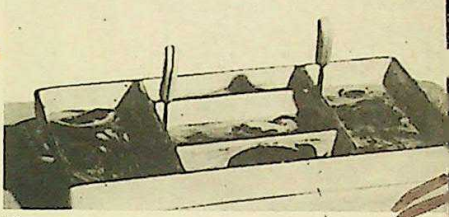

9.

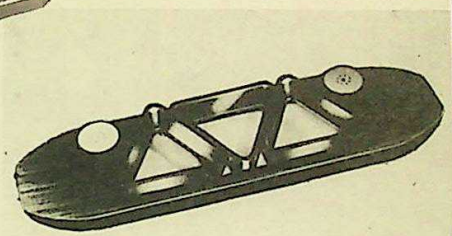

10.

11./12.

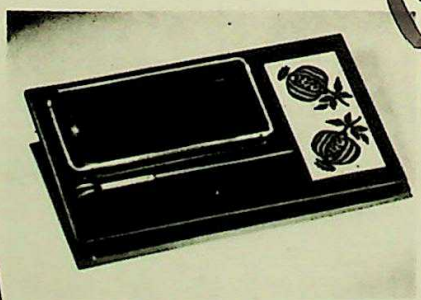

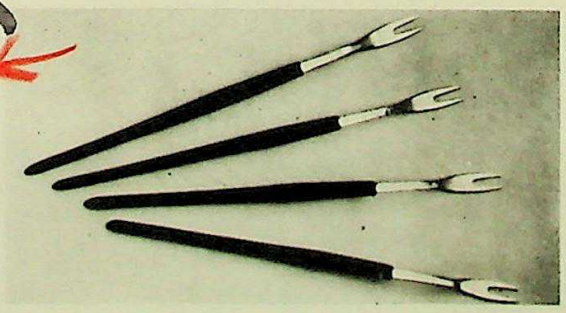

13./14.

D7/553.2



# TABLEWARE

30

31

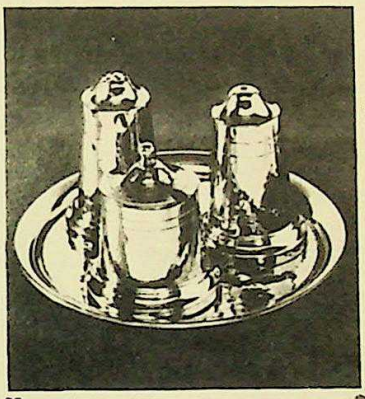

32

33

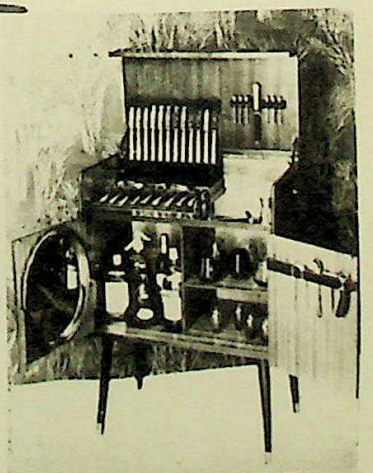

34

The insulated ice pail, miniature ice pail, martini mixer and cocktail shaker, in the foreground of the picture, are all new lines by Maddison & Co. (Bar Equipment) Ltd. This range of bar accessories is made in silver anodised aluminium. **30**

This E.P.N.S. table water jug, designed by David Mellor and manufactured by Walker & Hall Ltd, has a 2¾-pt capacity. It was specially designed to the specifications of the P. & O. Line for use on the liner 'Canberra'. **31**

This condiment set made from 'Olde Country Rose' pewter is manufactured by James Smellie Ltd. Designed about 1820, the set comprises a mustard pot with detachable liner, salt pourer, pepper pot and hand-hammered pewter tray. **32**

Manufactured by Millcross Woodcrafts Ltd, this biscuit, butter and cheese board is made from Walnut wood. There are separate compartments for each item together with a cheese server, butter knife and glass liner for the butter. **33**

The 'Dinabar' cocktail cabinet made in the Viner Group factory is fitted entirely with Thomas Turner Pedigree stainless steel products. It has a 44-piece suite of 'Windsor', a 13-piece bar set and a stainless steel salver. **34**

585

D7/553.2

# Exciting — Glamorous *Bolta* TEMPO TRAYS

*Created by the world's greatest designers*

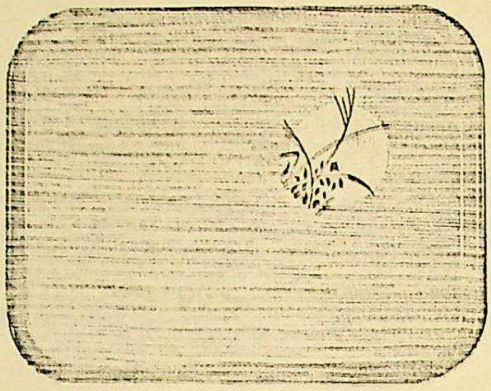

CLAIRE DE LUNE



TERRAIN



PAVEMENT

CHINA SHOP



WHEELS

- 17-layer lamination for extra durability
- Withstands commercially accepted dishwashing and sterilization temperatures*
- Non-porous, satin-smooth surfaces wipe clean
- Lightweight, noiseless, easy-to-handle
- Will not warp, split or stain
- Impervious to cigarette burns, food acids, alcohol and fruit juices

* Recommended temp. 180°F

### TEMPO TRAY SIZES

| OBLONG ONLY | | Packed |
|---|---|---|
| No. 810 | 9⅞″ x 8″ | 2 doz. per carton |
| No. 1014 | 13⅞″ x 10¾″ | 1 doz. per carton |
| No. 1216 | 16½″ x 12⅛″ | 1 doz. per carton |
| No. 1418 | 18⅛″ x 14⅛″ | 1 doz. per carton |
| No. 1520 | 20¼″ x 15⅛″ | 1 doz. per carton |
| No. 1622 | 21¾″ x 15¾″ | 1 doz. per carton |

### PATTERNS AND COLORS

CLAIRE DE LUNE*, by Tatsuhko Heima — Grey, Beige, Green.
TERRAIN*, by George Nelson — Green, Cocoa, Grey.
PAVEMENT*, by George Nelson — Pink, Aqua, Cocoa.
CHINA SHOP*, by George Nelson — Green and Yellow, Grey and Yellow, Cocoa, Grey.
WHEELS*, by Bernard Rudofsky — Green, Grey, Cocoa.
*Designed for the STIMULUS Collection of Schiffer Prints.

CATALOG SHOWING FULL PATTERN AND COLOR SELECTION OF TEMPO TRAYS AVAILABLE ON REQUEST.

---

# BOLTABILT

America's most popular trays! Boltabilt plastic trays

- Lightweight, yet tremendously durable
- Will not break, split or warp
- Impervious to food acids
- Heat-resistant for mechanical washing
- Great drop-resistance

### OBLONG TRAYS — 8 SIZES

| COLORS: Solid Brown or Red | | Packed |
|---|---|---|
| No. 46 | 4¼″ x 5¾″ | 12 doz. per carton |
| No. 57 | 5″ x 7″ | 12 doz. per carton |
| No. 810 | 9⅞″ x 8″ | 2 doz. per carton |
| No. 1014 | 13⅞″ x 10¾″ | 1 doz. per carton |
| No. 1216 | 16½″ x 12⅛″ | 1 doz. per carton |
| No. 1418 | 18⅛″ x 14⅛″ | 1 doz. per carton |
| No. 1520 | 20¼″ x 15⅛″ | 1 doz. per carton |
| No. 1622* | 21 3/16″ x 15 3/16″ | 1 doz. per carton |

*Brown only

### ROUND TRAYS — 4 SIZES

| COLORS: Solid Brown or Red | | Packed |
|---|---|---|
| No. 11R | 11″ Dia. | 1 doz. per carton |
| No. 12½R | BEER TRAY (Brown only) 12½″ Dia., 1¼″ rim | 1 doz. per carton |
| No. 14R | 14″ Dia. | 1 doz. per carton |
| No. 16R | 16″ Diameter | 1 doz. per carton |

### OVAL TRAYS — 3 SIZES

| COLOR: Solid Brown only | | Packed |
|---|---|---|
| No. 1723 | 22½″ x 17⅝″ | ½ doz. per carton |
| No. 2025 | 24¼″ x 19½″ | ½ doz. per carton |
| No. 2328 | 27⅝″ x 22¾″ | ½ doz. per carton |

### CORK-LINED TRAYS — 11 SIZES

Non-Skid, cut down spillage, breakage, noise. Cord molded to plastic for longer life. Can be boiled, won't warp. (Specify Cork-lined).
COLORS: Red or Brown
OBLONG: Sizes same as No. 810, 1014, 1216, 1418, 1520*
ROUND: Sizes same as No. 11R, 14R, 16R*
OVAL: Sizes same as No. 1723, 2025, 2328* (Brown only)
*Dimensions and packing listed above.

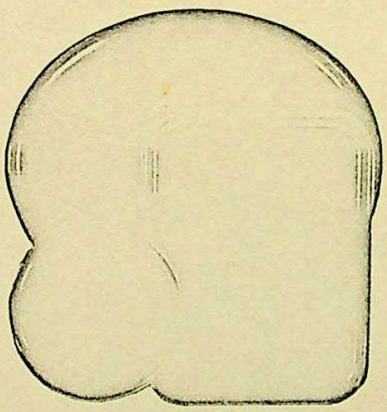

OVAL-ROUND-OBLONG TRAYS

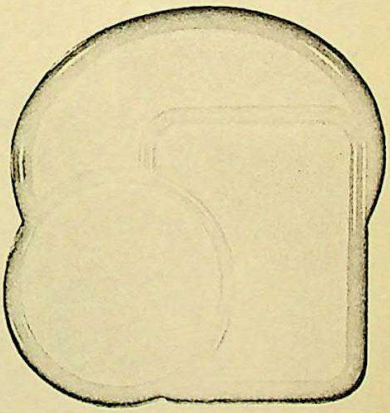

CORK-LINED TRAYS

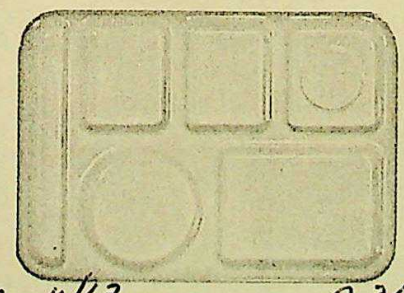

6-COMPARTMENT TRAY

### 6-COMPARTMENT TRAY

Holds 6-course meal. Won't crack, chip, warp.
COLORS: Coral, Pale Blue, Desert Tan, Foam Green, Yellow.
No. 314 10″ x 14″
Packed—1 doz. per carton

RESTAURANT EQUIPMENT DEALER 10/63 P. 36

RED 10/63

D7/553.2

# RINGING UP BIGGER AND BETTER FATHER'S DAY SALES

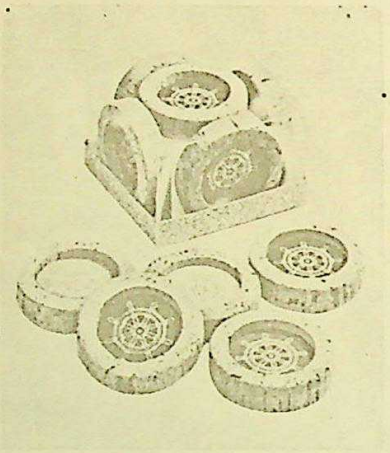

**Made from** Portuguese cork, these Beachcomber coasters from Park Sherman, Roseland, N. J., make perfect gift for boat fans. $3.95 a set for five in gift box.

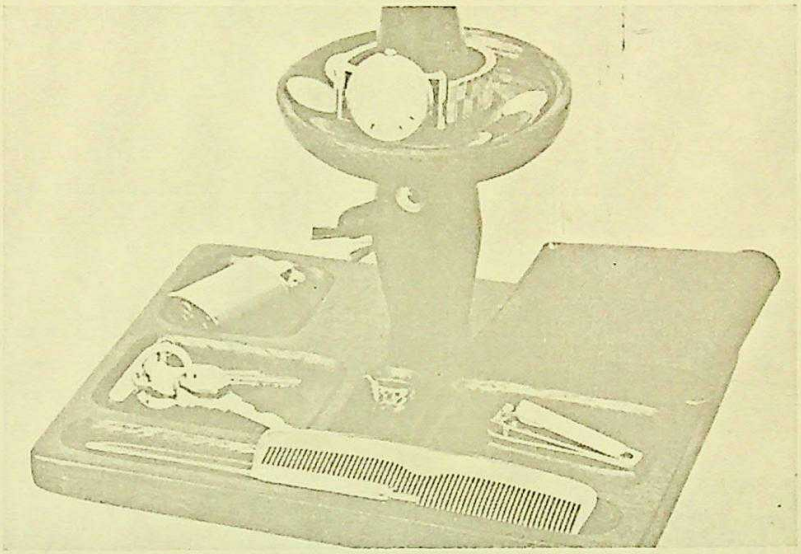

**"El Pancho"** valet of solid-grain hardwood deserves an "Olé" for its decorative, useful design. El Pancho's broad sombrero holds change, watch, tie clip while tray holds wallet, lighter, keys and whatever his pockets carry. $3.95 retail. Zoo-Line, 33 N. La Brea Ave., Hollywood, Calif. One of many valet designs.

**"Mad Hatter,"** one of four Character jugs introduced this year by Doulton & Co., 11 E. 26th St., New York. In three sizes, $3.75 to $12.50 retail.

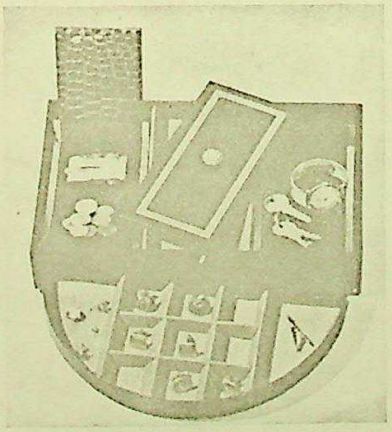

**Dunston Leathers'** new "Swing-A-Round" man's dresser has easy-slide scoops. Gold stamped on black or brown. $5 retail. (19 W. 18th St., New York)

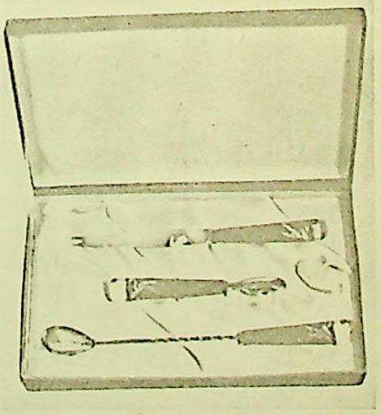

**One of** several gift sets with "Mystar" handles and stainless Sheffield blades from Picadilly Products, 118 W. 22nd St., New York. This Golf set is $7.



March 1965

Sweden D7/553.2

25 Neat, lightweight letter trays in high impact polystyrene which are intended for desks, drawer cabinets and other office furniture, and as detached storage units. The trays have stops to prevent them tipping and cork feet to avoid scratching table surfaces. *Designer Peter Pien. Maker AB Gustavsbergs Fabriker, Gustavsbergs.*

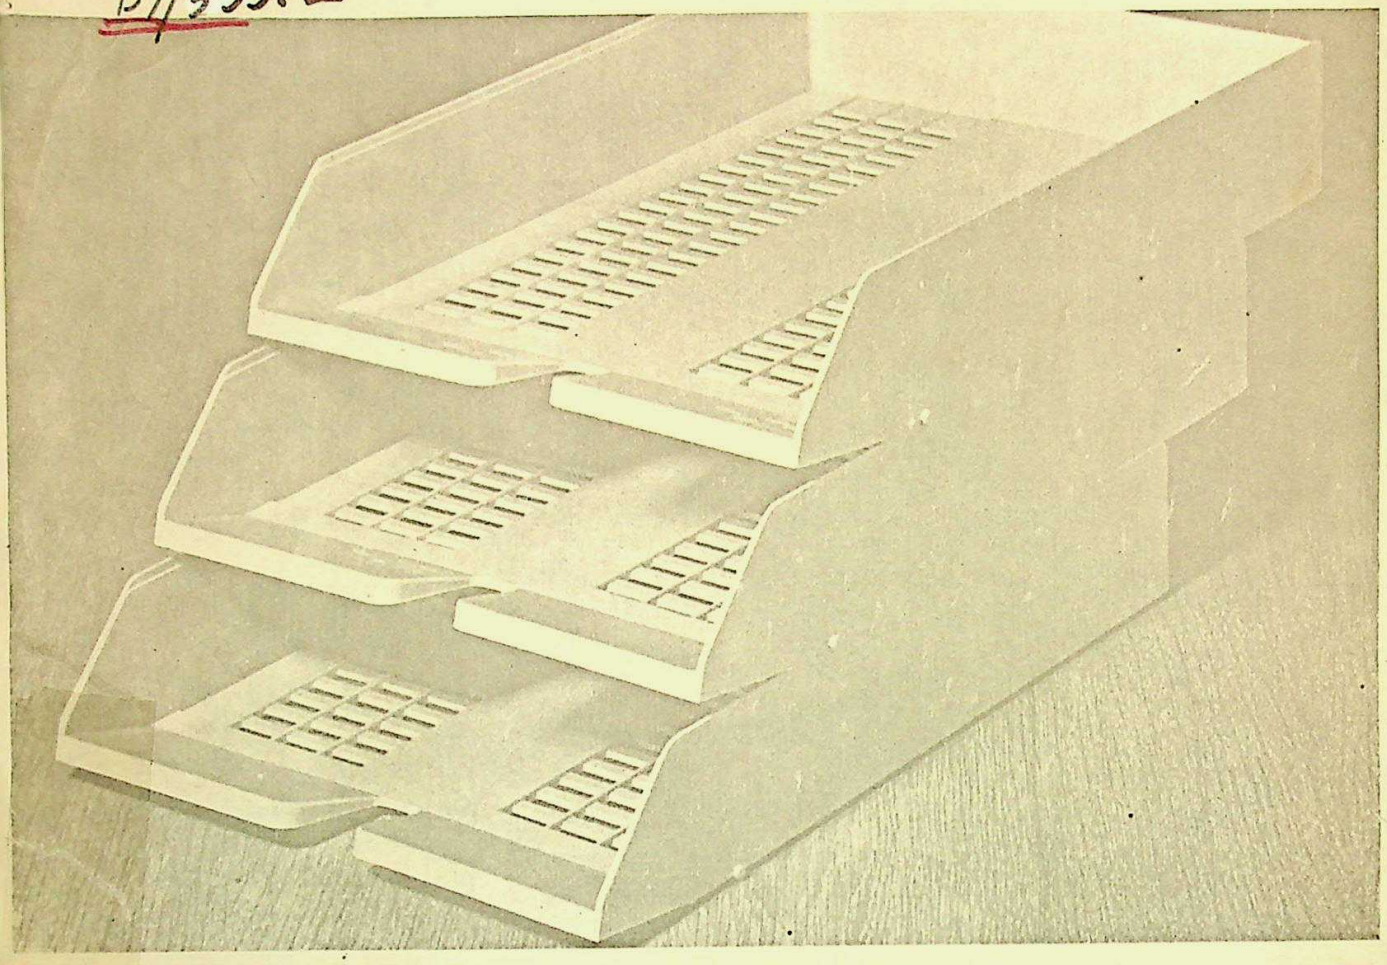

26 This *Helitherm* tray is for distributing warm food in hospitals. The tray consists of a sandwich of polyester, reinforced glass fibre and glass wool. The bowls are made in *Makrolon*, the dishes in white pottery. *Designer Hugo Lindstrom. Maker Skanska Attiksfabriken, Perstorp (tray) and Elektro Helios, Stockholm.*

27 A robust shape has been given to these vacuum carafes which have a steel glass container and an outer casing, handle and cork top of ANS plastics. *Designer Carl-Arne Breger. Maker Aktiebolaget Husfvarna Borstfabrik, Huskvana.*

26

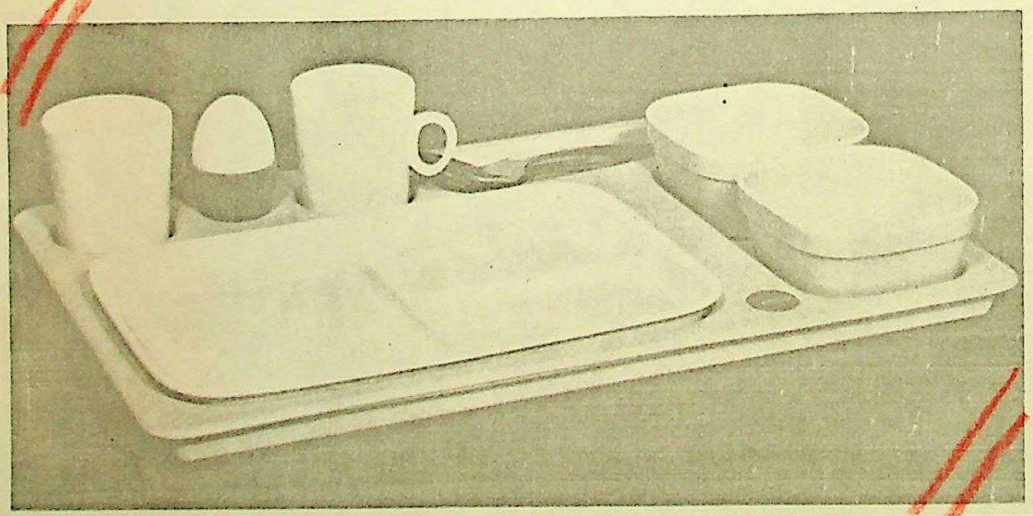

27

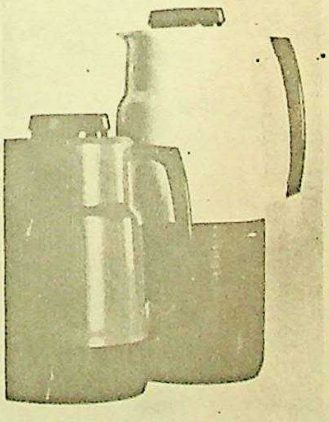

D7/553.2

CATALOG COPY IN → T-2 BOX

# Thermalene® PRODUCTS INCORPORATED

D7.553.2

CATALOG

## INCLUDING EDGAR WATKINS AT HOME

## VARIETY AND VALUE COMBINED WITH AMERICAN MANUFACTURE

Mail room date
May 19, 1980

COVER – PAGE 1

OUTDOOR PICNIC INDOOR PARTY. THE GOURMET BUFFET TAKES CARE OF EVERY NEED—FROM SOUP TO NUTS, FROM DRINKS TO DESSERT.

#8551, La Cuisine; #8554, Les Cubes; #85[illegible] Le Buffet; #8556, Le Tray; #8557 Le Drink Jumbo (19 oz.); #8558, Le Drink DOF, (14 oz.) #8550 [illegible]p du Jour; #8555 Les Bonbons; #3325, Salad Spun (see back cover also), #8553, Le Cake. All in [illegible]colate brown and almond with clear plastic covers.

## PATIO PLUS GROUP

Most Patio Plus items come in any one of six colors, plus clear. The Cake Susan, both with and without dome, and the Popcorn Bowl come only in clear, white, chocolate or almond. Additional colors for the other pieces are green, yellow and terra cotta. Please specify color as well as style number when ordering.

**A.** Hot and Cold Servers. One compartment, 10½" long, 1 qt., #8511; two compartments, 2 qts., 14" long, #8512.

**B.** Hot and Cold Server. Three compartments, each 1 qt., 19" long, #8513.

**C.** Salad Susan. The dome top inverts and can be used either as a cover for the lazy susan or as a salad bowl surrounded by salad bar, 16½" diameter, #3325.

**D.** Cake Susan. On a revolving, 12½" diameter platform, #8517.

**E.** Cake Susan with Dome. Same as above, with cover, #8518.

**F.** Popcorn Bowl. Or covered snack or candy bowl, 9" diameter, #8519.

## DAISY GROUP

**A.** A large white flower with yellow center decorates each piece of this group. Individual salad, #4160; 14" salad bowl, #4302; 16" round tray, #4602. Not shown, 12" round cutting board, #4402.

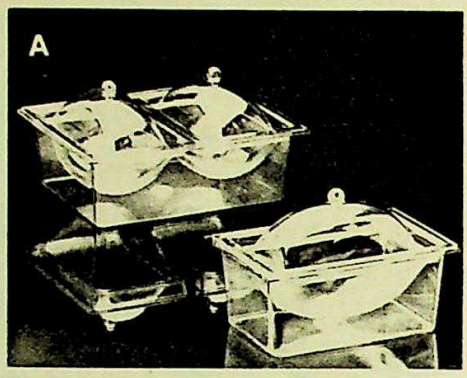


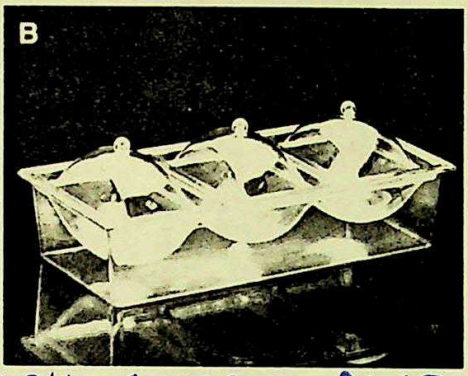


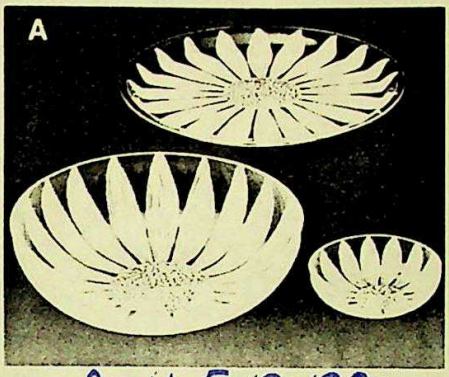


BACK COVER — PAGE 8

Rec'd. 5-19-1980

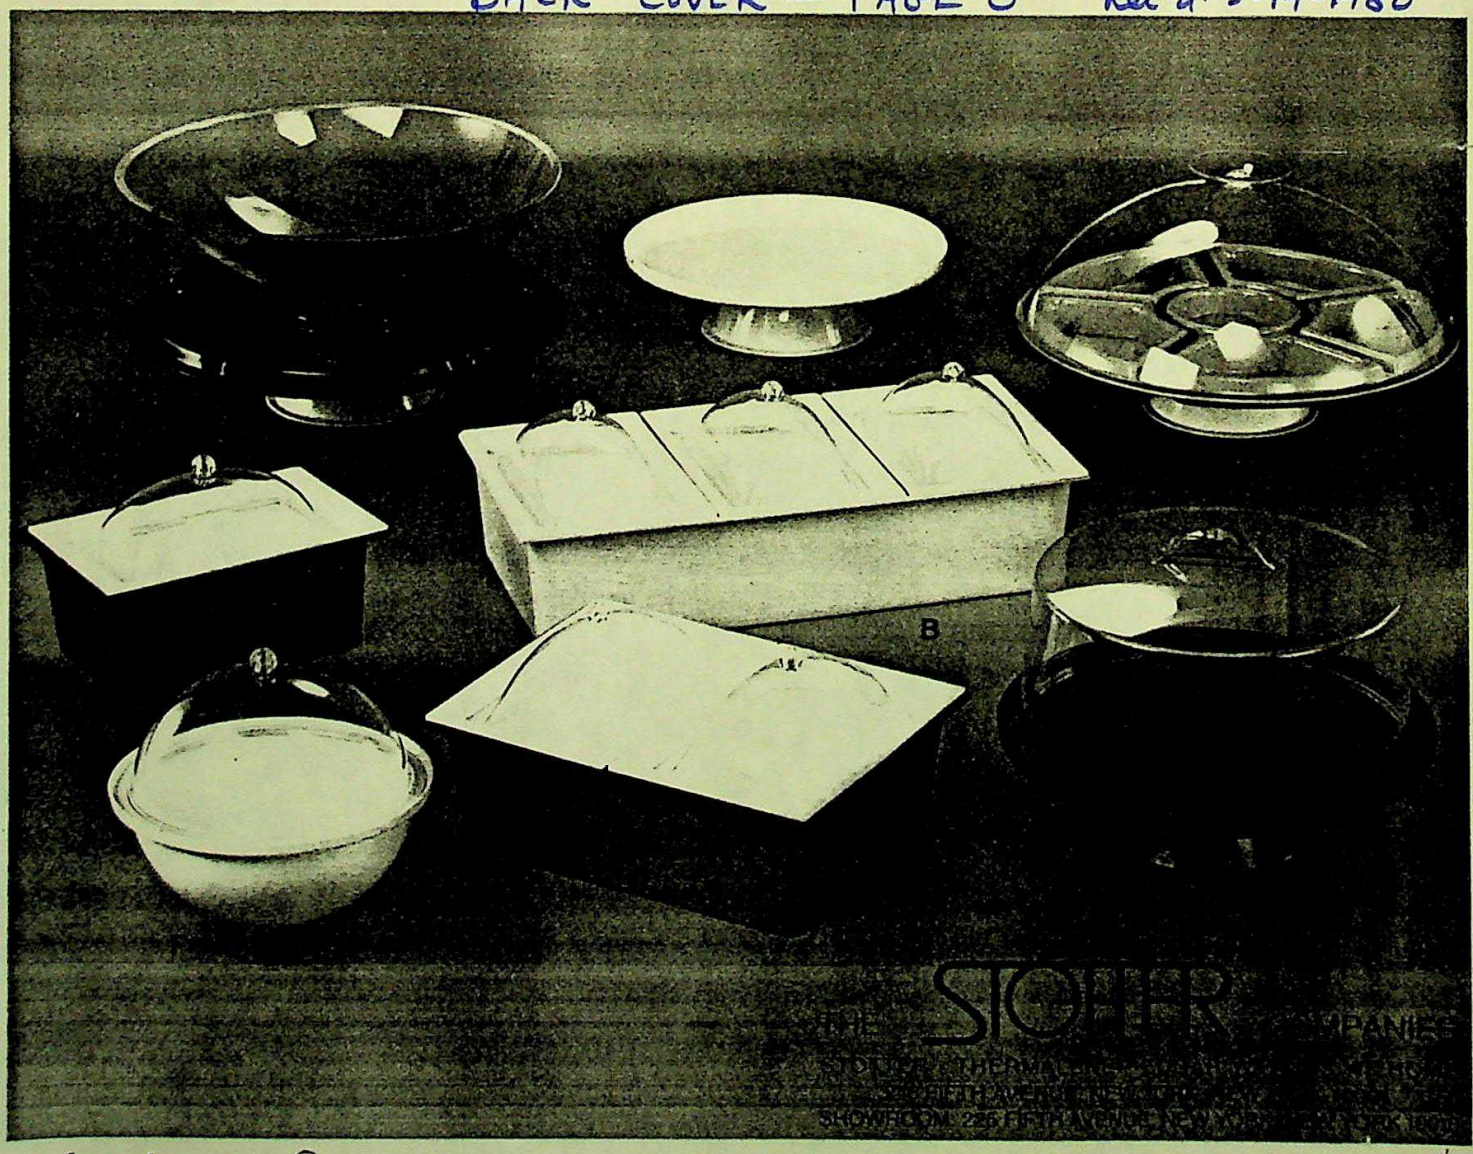


p. 8

12M 80

(14)
D7/553.3
August 1936

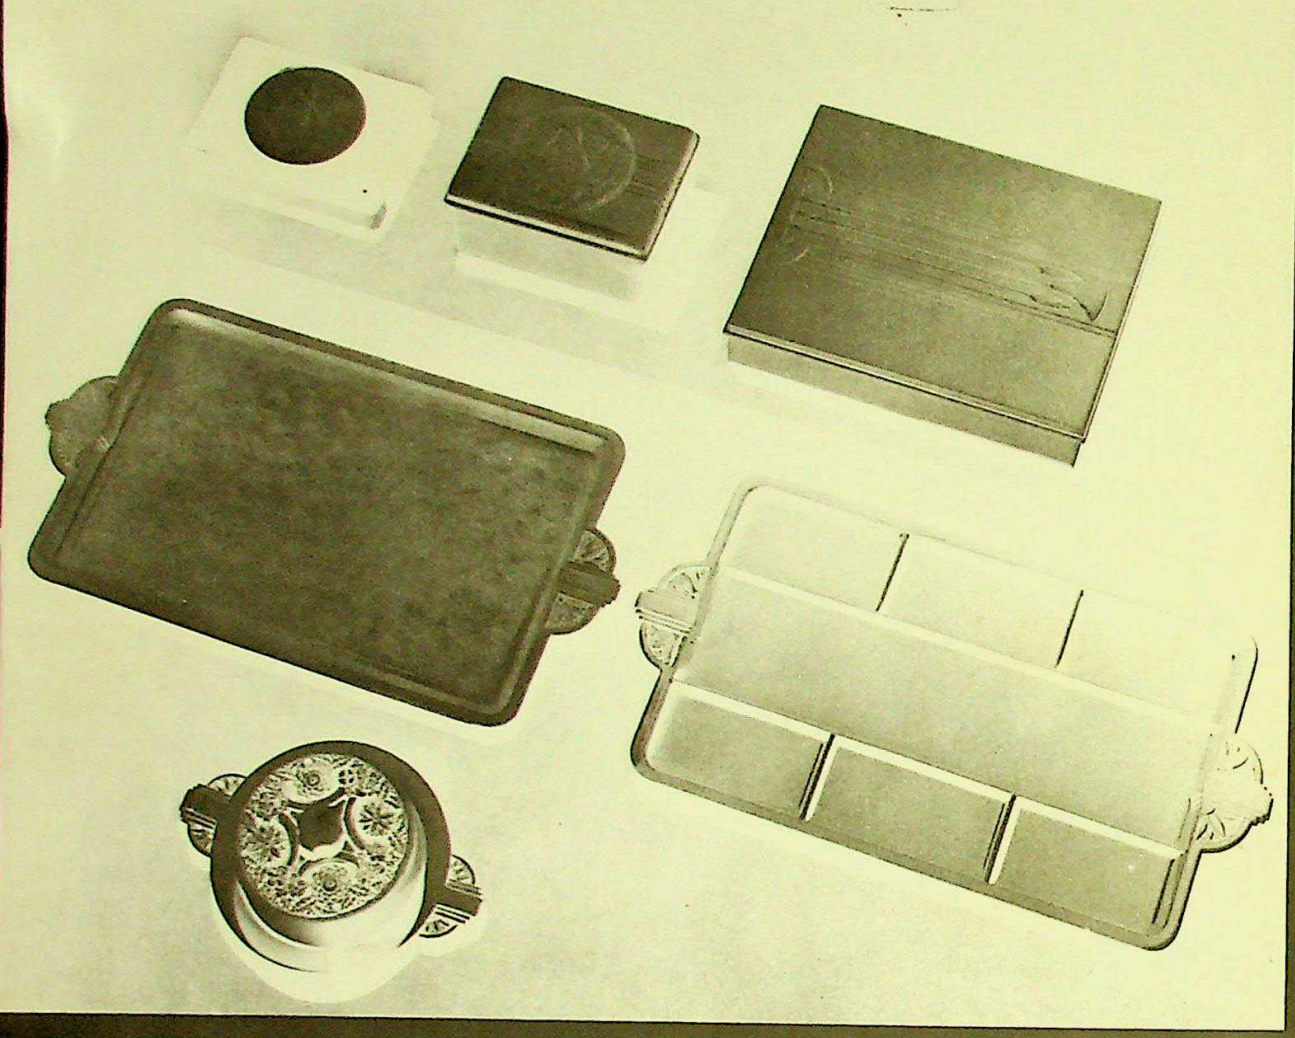

These interesting designs of modified modern by Pierre Chéron have been reproduced in Beetleware by the Gorham Company using beryllium copper molds

# Where do we go from here?

BY PIERRE J. CHÉRON

THIS homely phrase takes on special significance when applied to resinoid plastics. It is timely and of utmost importance to every one of us who assume responsibility of guiding industry in design. Yes! And I would add with emphasis—guarding the industry, that we may pass it down to posterity with the full measure of pride comparable to a material so practical and exquisitely developed. A rehearsal of the achievements of chemical engineers in the creation and development of plastics would be superfluous to this story, further than to say that they have acquitted themselves gloriously and are continually and successfully expanding its application to a variety of specific requirements undreamed of in the past and unpredictable for the future.

A little more than a quarter of a century ago, this infant "plastics" was born. Naturally enough, its existence had to be justified. Progression through trial and tribulation has brought it through a healthy childhood to adolescence. In industry, it is still a youth but it has attained stability and a substantial measure of respect. Now we find ourselves at the crossroads of trend in design. During the recent years while plastics were getting their growth, industry became deeply interested in design. Familiar things were stripped bare of ornamentation until few but the plainest and simplest forms are to be seen. This is, in a measure, a reflection of the economies of the nation from which none escaped. Naturally enough, plastics have been designed along these lines but, since we are now emerging from this condition, it might be well to take inventory.

As we pause in retrospect and review the products fashioned from plastics, we find that they fall into one of two classifications which we might designate "apparent" and "concealed." The apparent form includes individual pieces in daily use, such as jewelry, kitchen and household utensils, boxes, ashtrays and so forth, most of which are of an inexpensive nature. In the concealed form, we find plastic parts in automobiles,

[redacted] The Bakelite Review - April, 1941 - p. 16

D7.553.3

# PLASTICS

## Salt in Season

The new Swanky salt and pepper servers, designed by the Oster-Bauer Shop, measure out their contents without shaking. The push button mechanism meters out the salt or pepper evenly. The servers are molded in red, blue, green, yellow, black, and white from Bakelite polystyrene, which will not become corroded by contact with the salt. The four molded parts—base, barrel, plunger, and cap — are molded by Chicago Molded Products Corporation.

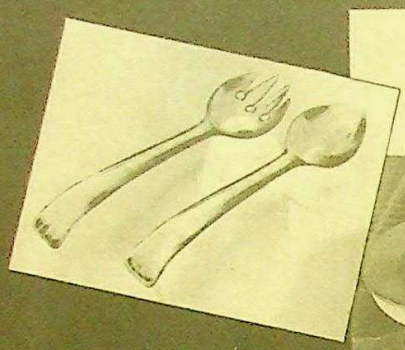

## Serve in Style

Whether you be host or hostess, mixing and serving your favorite salad concoction, guests will raise their eyebrows when they see you use this modern and lightweight fork and spoon salad set. Molded from transparent Bakelite polystyrene in a variety of colors, one or more sets may be used to blend with your favorite luncheon or dinner color scheme. They will not absorb or be affected by vinegar, salad oils, and other ingredients so important in making a tempting salad. They're products of Plastics, Inc.

## Vases with Ripples

The ready formability of Vinylite plastic sheet has made possible an entirely new adaptation of the material — in "rippled" vases and dishes for nuts and candy. Croasdale and deAngelis now fabricate attractive vases and dishes from sheet stock 0.060 inch thick, tinted in various colors so that they can be used in many table or flower arrangements. In this use, Vinylite plastic sheet's strength, resistance to breakage, and moisture resistance all help to make a better product, while the ingenuity of the fabricator accounts for strikingly beautiful designs at comparatively low retail costs.

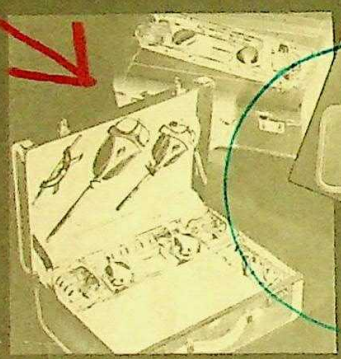

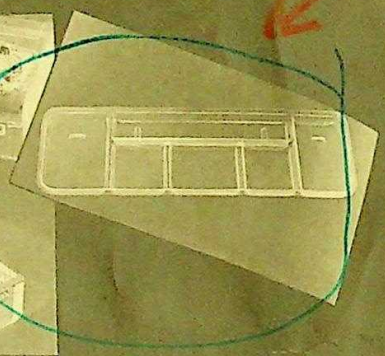

## For Traveling Light

Lightness in weight and strength are all-important in airplane luggage. It is not surprising therefore that Vinylite plastic sheets are being formed into light, strong, practical luggage trays for suitcases. Those shown are fabricated from Vinylite plastic sheet by Croasdale and deAngelis and are used in luggage sold by Philadelphia Leather Goods Company. All the trays are made from clear sheet and are available, as standard, in any of three colors—clear, blue, or rose—so that they match the color of other fittings in the suitcases. However, the use of Croasdale and deAngelis' specially prepared dyes allows an unlimited range of colors if desired.

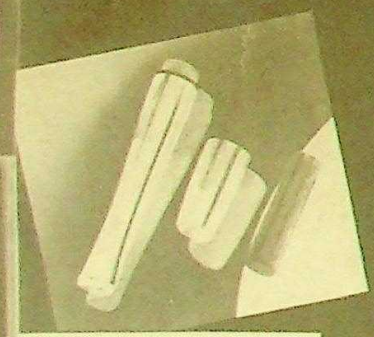



## Filtered Smoke

Smoking pleasure is increased by the use of Denicotea cartridge and cigarette holder, distributed by Alfred Dunhill of London, Inc. and manufactured by Sani-Smoke, Inc. The casing of the cartridge is molded from transparent, chemically resistant Bakelite polystyrene. As the tiny crystals in the cartridge absorb nicotine, pyridine, and other tobacco impurities, they change from white to yellow, then red, and finally dark brown. The replaceable polystyrene filter capsules are not only resistant to these chemicals, but are tough and not likely to crack or shatter. Thomas Mason and Company, molder.

## Vest Pocket Efficiency

The Cooper Carryall Safety Razor comes complete in one little package less than 4 inches long. Designed by Martial and Scull for simple, modern efficiency, the outfit consists of case-handle, two-piece shaving head, and 10 blades. The case-handle is molded of black Bakelite phenolic, the tightening knob from red phenolic. The instrument is molded by Joseph Stokes, Inc. for Cooper and Cooper, Inc.



Modern Plastics
Feb. 1946
page 138
D7-553.3

*All molders and fabricators are invited to send samples of stock and proprietary items to appear on this page as space permits.*

*Stock Items 1-1582 appear in the Plastics Stock Mold Catalog, 1944, available at $5.*

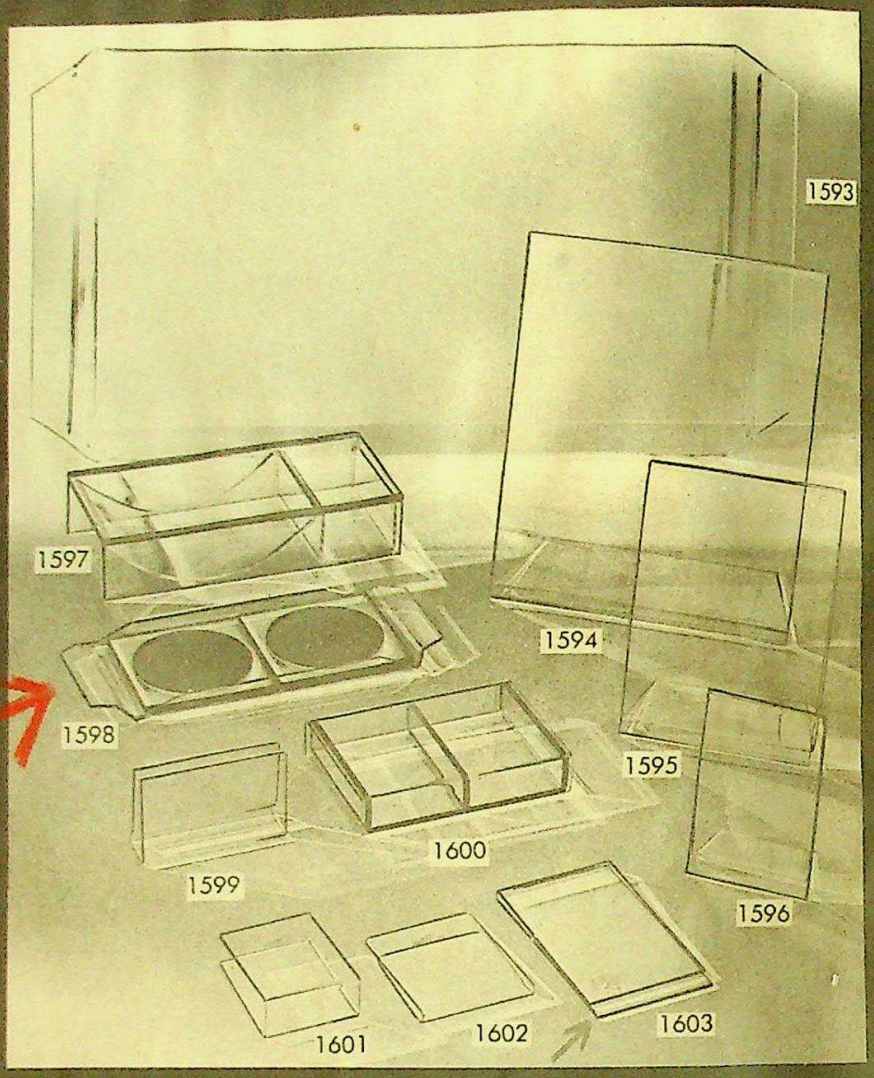


# Plastics Stock Molds*

## SHEET ONE HUNDRED THIRTY-FOUR

1593. Tray formed from single sheet. Overall length 22 in., 12 in. wide

1594. Two-sided standing picture frame formed from single sheet; 10 in. high, 8 in. wide

1595. Two-sided standing picture frame, formed from single sheet; 7 in. high, 5 in. wide

1596. Two-sided standing picture frame, formed from single sheet; 4 in. high, $2^3/_4$ in. wide

1597. Cigarette box with sliding cover. Two compartments, one rectangular and one concave. Overall dimensions, $8^1/_4$ in., $1^3/_4$ in. Concave compartment 6 in. long

1598. Coaster tray fitted with 2 separate coasters. Tray $3^3/_4$ in. wide, $9^1/_4$ in. long. Coasters $3^1/_2$ in. square with 3-in. diameter center. Tray formed from single sheet.

1599. One-piece playing card holder, suitable for 1 deck. $3^1/_4$ in. high, $2^1/_4$ in. wide, $^3/_4$ in. deep

1600. Two-deck playing card box with sliding cover. Overall dimensions 5 in. by $3^1/_2$ in. by 1 in. deep

1601. Cigarette package holder formed from one sheet. $2^3/_4$ in. square, 1 in. deep

1602. Money clip formed from single sheet; 3 in. long, 2 in. wide

1603. Pocket-sized picture frame formed from single sheet; $4^1/_2$ in. long, 2 in. wide

* Reg. U. S. Patent Office.

D7/553.3

# "Picklepuss" specials

**By Betty Wood**

Find yourself reaching for the pickle dish not just once, but twice, three times, or more? Like to munch on a dill? Do you fairly load pickle relish on a hot dog? Then you're a Peter Piper at heart. You'll want to try a peck of pickle tricks, whip up our extra-tasty recipes (they're on page 135) using your favorite pepper-upper.

There are more than 36 types of pickles, and they can be grouped in four classes: dill, sour, sweet, and fresh-packed. Dill pickles are flavored with dill and mixed spices. Sour pickles are packed in sour vinegar and spices. (Chowchow's sour mixed pickles with mustard sauce.) Sweet pickles start as sour pickles, are packed in sweet, spicy liquid. Fresh-packed pickles are pasteurized rather than brine-cured like the others.

In the "pickle patch" at your neighborhood market, you'll find pickles and relishes to suit all tastes. Use them to give snap and variety to your meals, and be sure to try the tasty pickle specialties shown here.

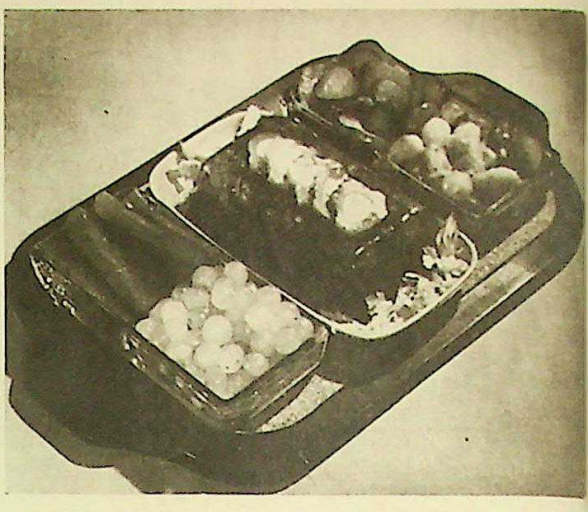

*Help yourself to the relish tray*

Piccalilli Mold with stuffed-pickle slices atop, candied dill sticks, tiny pickled onions, crisp pickle slices, and mixed mustard pickles.

*Stuffed-pickle Slices:* Cut thin slice from stem end of large dill. Hollow out center of pickle with apple corer.

Stuff with softened cream cheese or favorite spreading cheese. Chill well. Slice.

*Pickle-fan trim for pickle fans*

Here's the perfect garnish for a Dutch lunch of cold cuts, cheese, and dark bread.

Fans around edge of platter are gherkins; ones near center are junior dills.

*Pickle Fans:* Slice pickle lengthwise almost to stem end, making thin slices.

Spread out each fan as in picture; press uncut end so fan will hold shape.

Photographs: Nelson, Photography, Inc.

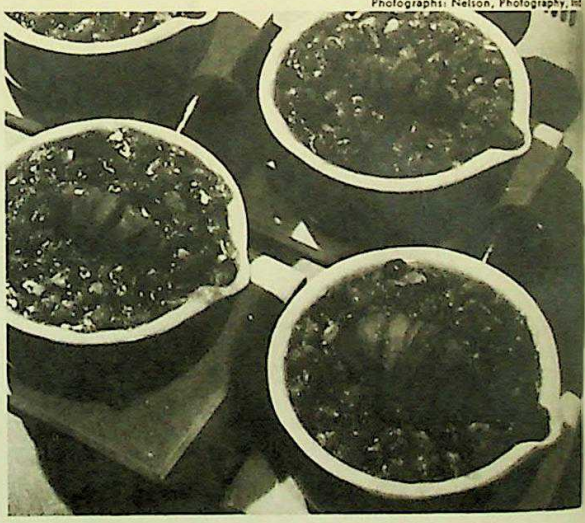

*Baked Beans à la Pickle*

Sweet-pickle relish spikes up canned baked beans; pickle accordions ride high on top.

Out of this world, say pickle lovers! And, Mother, these beans bake in 30 minutes!

*Accordions:* Cut off ends of pickle and slice it crosswise, almost but not quite through. Have slices thin.

Gently bend pickle so slices separate at the top.

**More on page 134**



p. 132

APRIL 1955

D7.553.3

Page 21
Mar. 26, 1958

Home Furnishings Daily



*CHEESE AND CHIPS: Sydney Farber & Son, Inc., of Brooklyn, makes this birch or walnut-finished snack server. Handles are bright brass. With bowl, plate and cheese spreader it will retail at approximately $16.95.*

RETURN TO
DESIGN DIV.

RETURN TO
DESIGN DIV.

RETURN TO
DESIGN DIV.

GIFTWARES 2-1960

XD 7/553.3

p. 56

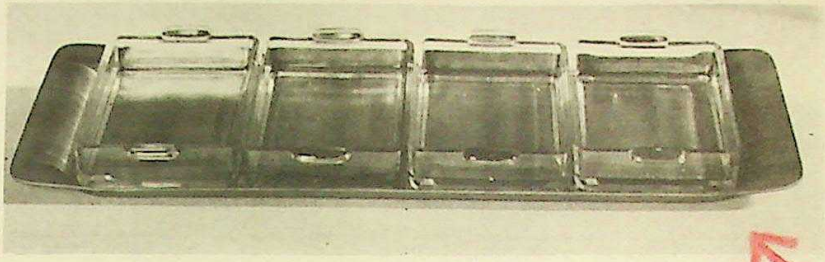

... has four 4x6 glass dishes. Retail, $7.95. Rainbow Wood Products.

Chadwick's ceramic figure, $25 ret., is 8" high; from Italy. Kornmann & Lee.

Gardens in Glass collection retails from $1.98 to $4.98; introduced by Charm House.

Tea towel in Floral Cantata pattern is hand-stencilled Belgian linen; $1 ret. Dewan.

Carnival in Venice decoration in transparent blue, red, and gold is $6.95 ret. for 8 hiballs or On The Rocks, $8.50 per set of 8 Suburban Hiballs. New from Ceraglass.

New Oriental Pine pattern decorates many accessories including twin canape server below: two 6x9 fiber glass trays, $6 retail gift boxed. Art-Line of California; at Edward Greeman.

Decorative butterfly themes line of brass-plated bath accessories by Elizabeth McCaffrey; pricing is modest. Group includes towel rings and bars, switch plates, etc. William Streeter.

Hanging Basket place mat of linen-like vinyl with foam rubber back comes in red or blue on white background; pink, aqua, beige, yellow, and grey. Retail is $1.19 per mat. By H. J. Stotter.

H. A. Kimura's collection of handmade Japanese stationery and desk accessories includes stationery of paper-thin wood veneer in original color and graining. $2.50 for 30 sheets, 20 envelopes in folder. Greta von Nessen.

Imported from Sweden, these optic-glass pitchers by Bergdala have styling that combines simplicity of modern design with lustrous richness of new trend toward elegance. $4, $5, $6 retail. R. F. Brodegaard.

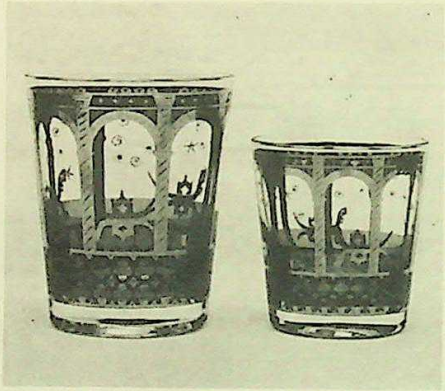

p. 56

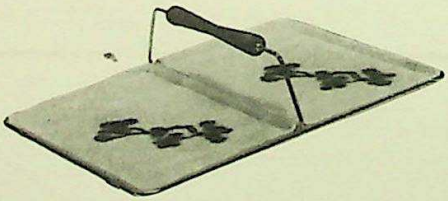

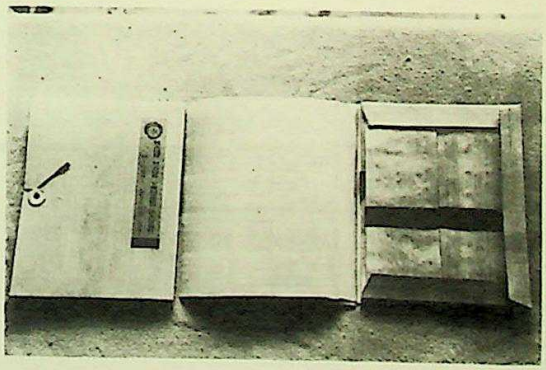

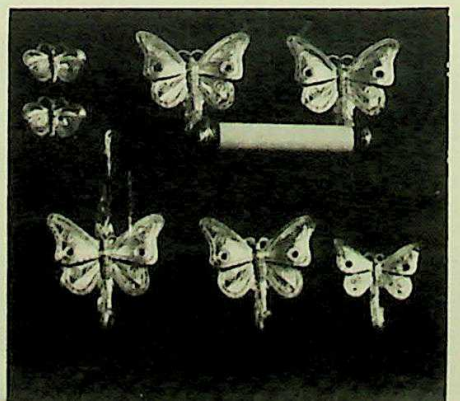

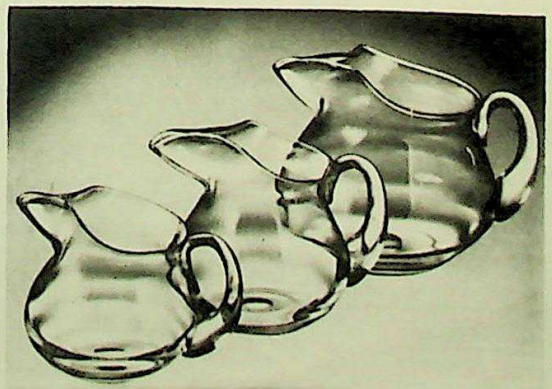

D7/553.3

toobusyness

One of our old friends, and a customer also, gave us a pat on the back recently. We aren't too bashful to tell about it. Old friend and customer said that the amount of detail in his shop kept him on the run constantly and he suffered from toobusyness. He said that the Skinner Selections catalog was wonderful for a toobusy man because it brought, regularly, a large variety of merchandise right to his desk, saving him time, money and energy.

If we are not doing the same for you, we would like to.

**S. P. Skinner Co., Inc.**

225 FIFTH AVENUE NEW YORK 10, N. Y.

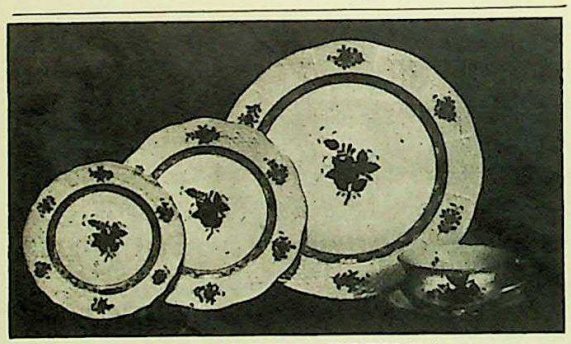

## HEREND CHINA

For 120 years, this china has been produced according to the highest standards. The finest body, enriched by a flawless glaze is hand painted with consummate artistry. Truly, there is no finer china in the world.

**Chinese Bouquet** pattern illustrated. The place setting shown here is on display in our showroom together with many other patterns and a wonderful variety of hand painted accessories, in shapes and designs of unusual grace and charm.

**BARTLETT & PARTNERS, INC.**

**225 Fifth Ave., Room 1225 New York 10, N. Y.**

## A NEW IDEA IN RELISH TRAYS

**THE ALL-IN-ONE TRAY AND SPREADERS**

**So original it's DESIGN-PROTECTED**

Five-compartment tray with 2 covered jars and 2 spreaders, in sturdy, hand decorated ceramic. P-424 $25. Retail
(Not shown) Five-part tray without jars, but with the two spreaders. P-423 $20. Retail

*Usual trade discount. Write for complete price list*

*Meiselman Imports*

*30 West 22 Street, New York City 10, Chelsea 2-4676*

*Fine Ceramics, Glass, Decorative Accessories*

*Showroom: 225 Fifth Avenue, New York City 10, Oregon 9-7190*

*CHICAGO: Middleton & Brown, 15-118 Mdse. Mart*
*DALLAS: Max & Marge Zelden, 1735 Dallas Trade Mart.*
*LOS ANGELES: Laurence Boord, 712 South Olive*

*Art Treasures by the World Famous Antonio Borsato*

Antonio Borsato

*The utmost in sculptured artistry . . . superbly executed to the minutest detail to achieve life like realism. Delicately hand colored with a finesse worthy of the old masters.*

*Sold only under controlled distribution in selected stores, art galleries and other exclusive art establishments.*

Bor. 963
*Sweet Memories*

*The line that knows no seasons . . . sells all year 'round!*

If you qualify to handle this high-ticket line of Borsato Art Treasures we invite you to write for a copy of our new album in full color . . . and to investigate the highly valuable franchise in your area.

Sole Distributors

*Intercontinental Industries Inc.*

555 WEST ADAMS STREET • CHICAGO 6, ILLINOIS

D7/553.3





23

Manufactured by George Butler & Co. (Cutlers) Ltd, this N915 range is made from forged stainless steel with hand-shaped 'Barrel' handles of white grained Xylonite. **23**

Hors-d'oeuvre set by The Betula Ltd, made in polished Walnut wood with four Denby 'Boutique' dishes. **24**

Barbrook (Blue Pool) Ltd, have manufactured this twelve-piece luncheon set in a plain basket weave material made in Holland. The set comprises six red mats and six white napkins and the fringed work is finished with a locking zig-zag stitch to prevent further fraying. **25**



24

Coalport China Ltd, bone china table mats. This is the 'Victoriana' series for which the copper plate engravings were executed by the famous engraver Jessie Austen of Pratt & Company. The prints on these mats are underglaze and therefore quite indestructible. **26**

This attractively designed tea strainer and stand with black handle is made by Arnold E. Williams & Sons Ltd in E.P.N.S. **27**



25

Distributed by D. Goldstein (Hardware) Ltd, the stainless steel serving tongs are 8 in. in length. **28**

These elegant candle holders from Hadelands of Norway are distributed by Edward Bowman and Son, Ltd. Left, the 'Lily' holder, available in clear blue or smoke glass. The 'Firskin' holders on the right come in clear or smoke-textured glass and are available in two sizes. Also shown are decorative spiral candles from the Tyri of Norway, available in sizes 7½ in. and 10 in. and a colour choice of white, ivory, yellow, pink, red, lilac, blue, green and black. **29**



27

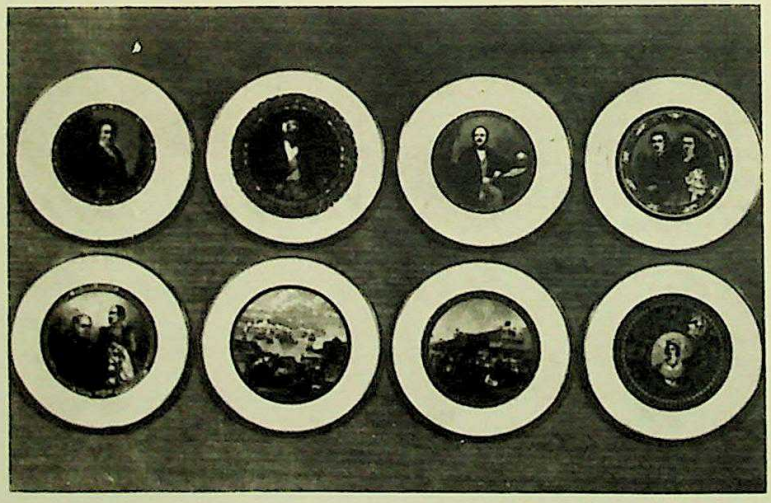

26



28

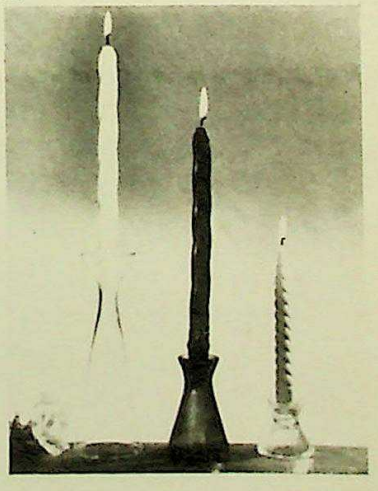

29

D7.553.3

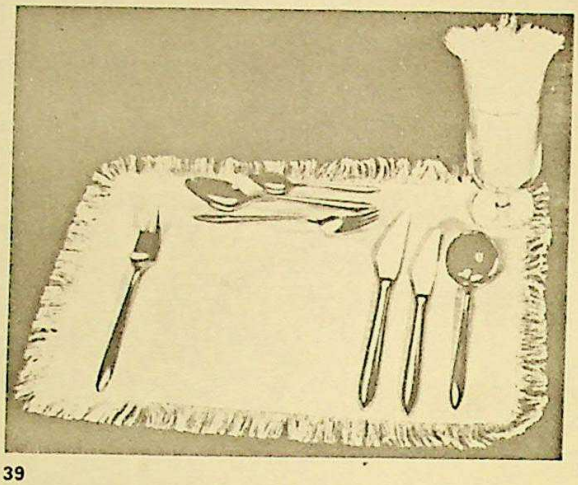

39

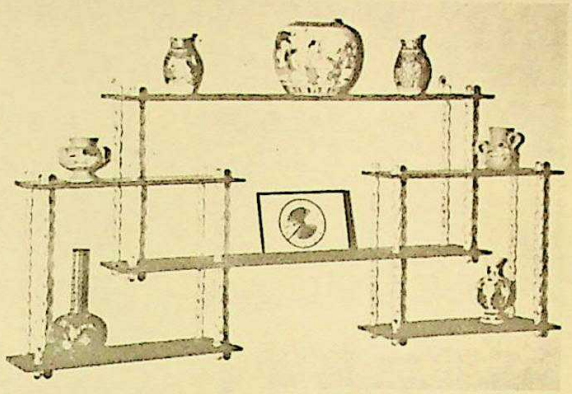

41

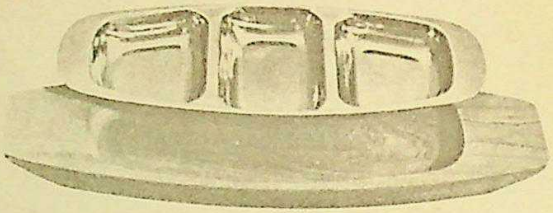

40

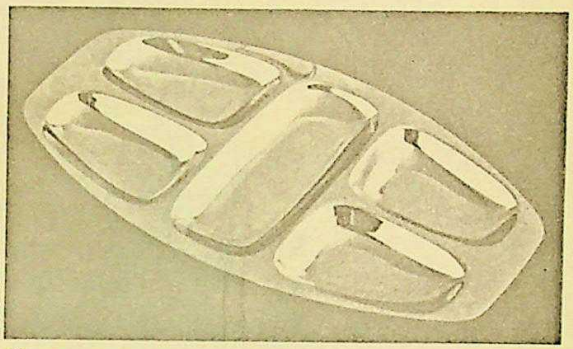

42

(39) **Gero** seven-piece place setting in Zilduro, mirror-polished precious steel. Also showing ten patterns of stainless steel cutlery, including the tulip-inspired Festi. Various toddler and baby sets made of stainless steel comprising knife, fork and spoon, christening sets in fairy-tale designs depicting Cinderella, Snow White or Little Red Riding Hood.
Gero Tableware Ltd. Stand 120

(40) **Sardine** dish in stainless steel with mahogany platter are part of a range of stainless steel lines. Other items include: stainless steel hors d'oeuvre forks with black handles, a fruit salad dish in stainless steel, a cocktail snack dish and an olive or dessert dish, both in stainless steel.
D. Goldstein Ltd. Stand 317

(41) **"Dual de Luxe"** wall bracket, with spiral plastic pillars, made from specially chosen seasoned timber, finished in black with a gilt edge. The spiral pillars are a development of the previous straight pillars and have been applied to other wall fitments on show—The Leamington, Doric, Windsor, Warwick, Richmond, Cheltenham and the new Stroud.
William Foster Ltd. Stands 386 & 292

(42) **"Riviera"**, six pieces from an extensive range of chromium plated ware which will be on show along with many new lines in table woodware, etc.
Simons Brothers Ltd. Stand 55

[redacted]

D7/553.3

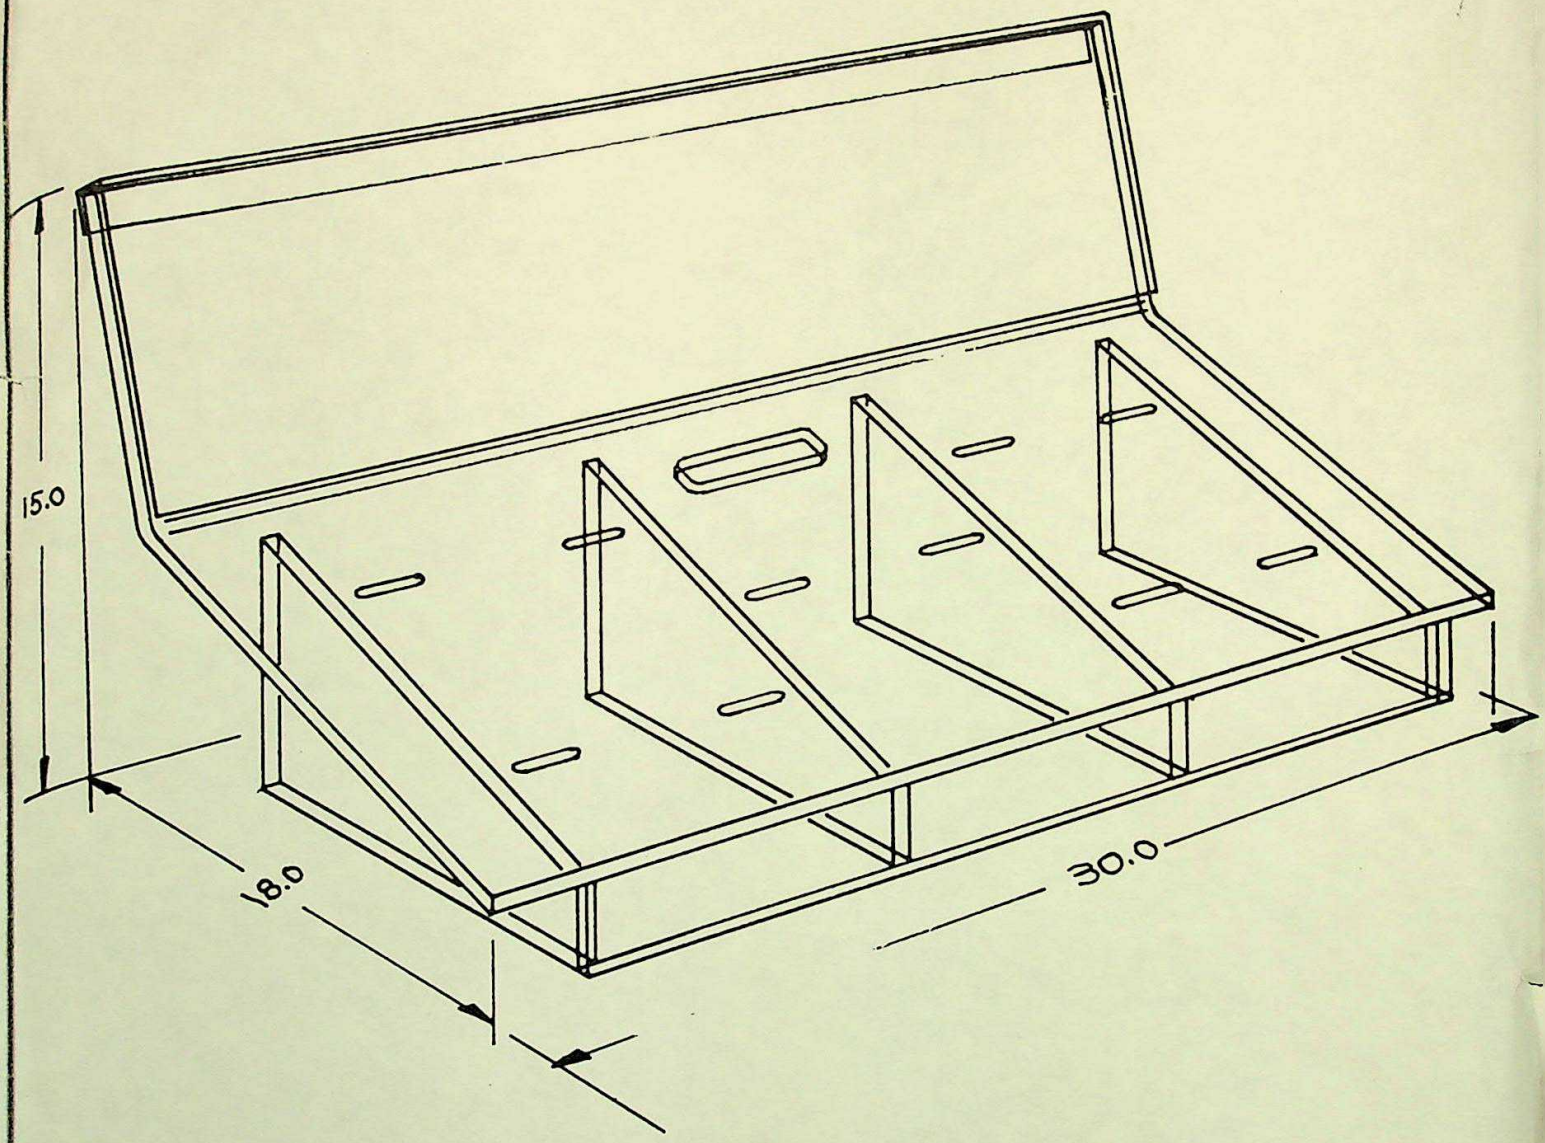


AUGUST 1, 1983

ORIGINAL IN
"LUCITE" BOX
D-6

GLYNCO PLASTICS, INC.
5415 Opportunity Court
Minnetonka, MN 55343

D7/553

FEB., 1987
PAGE 217

# CONQUER *the* GREAT DIVIDE

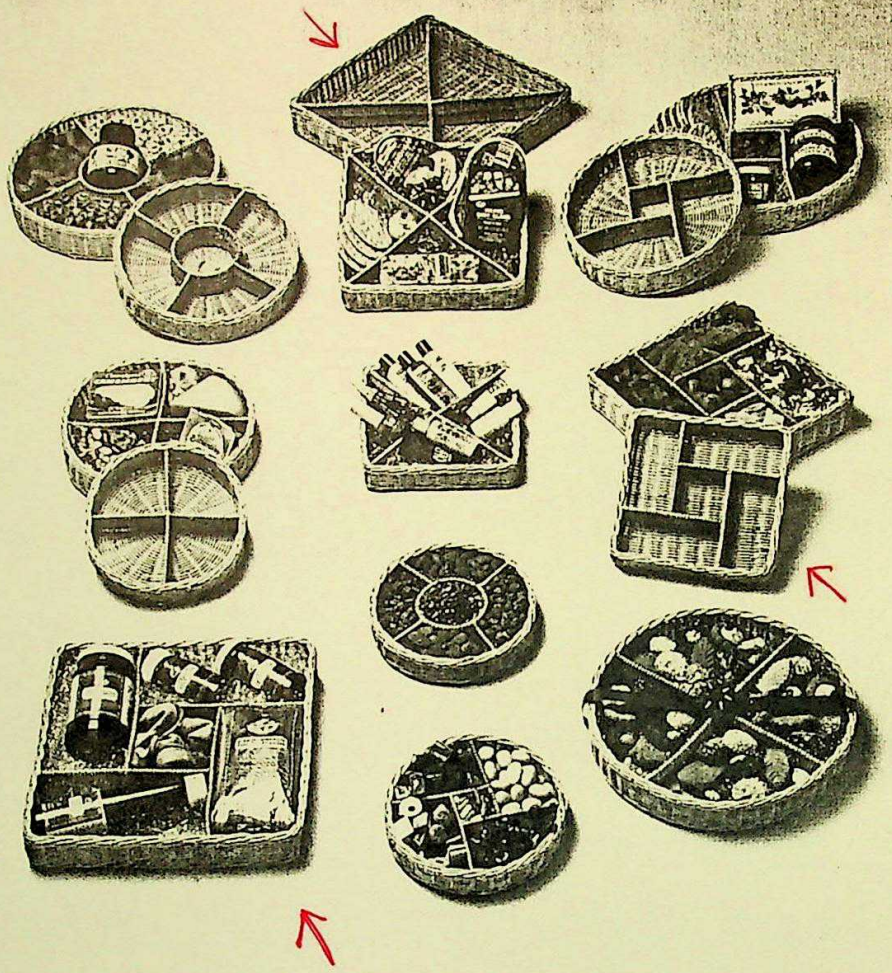

Nuts, Dried Fruit, Candy, Cheese, Coffee, Tea,
Herbs, Potpourri & More

GIFTS & DECORATIVE ACCESSORIES

We offer a complete selection of baskets for
YOUR SPECIALTY PACKAGING NEEDS. Call or write
for our full catalogue VOLUME III

## WILLOW SPECIALTIES

*The Rochester Basket Company*
71 Parkway / Department F-17 / Rochester, NY 14608
(716) 254-8260

Orders for Flattancore Divided trays accepted through July 17, 1987 for Fall delivery.

D7.553.3

FEB., 1987
PAGE 217

GIFTS & DECORATIVE ACCESSORIES

# CONQUER *the* GREAT DIVIDE

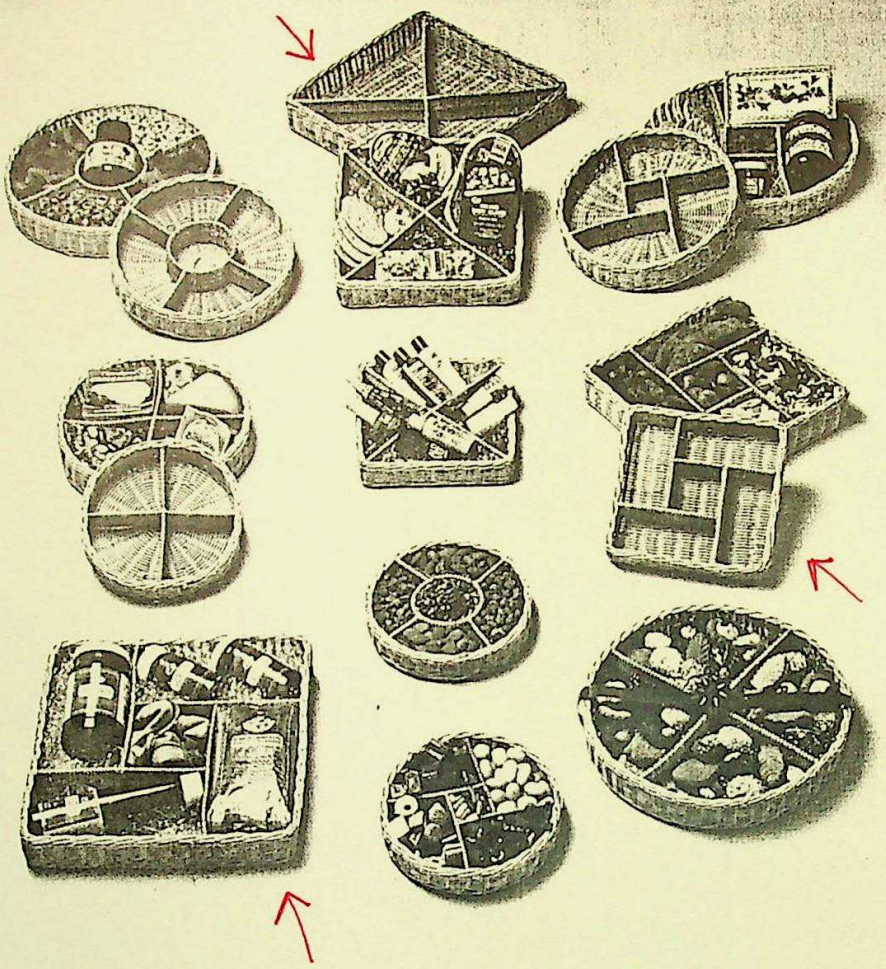

Nuts, Dried Fruit, Candy, Cheese, Coffee, Tea,
Herbs, Potpourri & More

We offer a complete selection of baskets for
YOUR SPECIALTY PACKAGING NEEDS. Call or write
for our full catalogue VOLUME III

## WILLOW SPECIALTIES

*The Rochester Basket Company*
71 Parkway / Department F-17 / Rochester, NY 14608
(716) 254-8260

Orders for Rattancore Divided trays accepted through July 17, 1987 for Fall delivery.

*Improved Wash-table for use of Invalids and the like.*

side of the tray is hinged a strut or supporting link 13 which is held in the collapsed position by means of a spring clip 14. A pair of stops 15 are preferably arranged on the front of the board 1 to engage one edge of the tray member so that this can be supported at an inclination. The bolts 15 could, if desired, be counter-sunk into the tray and be projected, when desired, to engage with corresponding recesses in the front edge of the board 1. The struts 13 may either be hinged to the board 1 or to the tray member 10 and can be of wood or strip metal, in which latter case it is preferred to slightly counter-sink the member to which they are attached so that a smooth surface is presented when the struts are in the collapsed position.

The usual series of notches or depressions could be arranged either on the board or the tray to allow for this latter member to be supported at any desired inclination to the board member. If desired a bracket can be detachably mounted on the tray member 11 for instance by means of pin and socket connections to support a mirror, a candle, lamp or electric light at any desired inclination thereto by means of links having adjustable ball joints.

The board and its receptacles can be of any desired material but it is preferable to make the board and its supporting legs, together with the tray, of wood finished in any desired manner, whilst the receptacles are made of the usual enamelled metal.

Along one edge of the board 1, for instance, the edge 9, a shaving or like mirror with accessories may be mounted to face the person washing. The mirror may be detachably secured to the table member 1 or may be hinged thereto so as to fall down parallel over the hole 4 in the board to make the articles as compact as possible when out of use. Racks for brushes or the like could be arranged along and mounted to depend from for instance, the rear ledge 9.

Having now particularly described and ascertained the nature of my said invention and in what manner the same is to be performed, I declare that what I claim is:—

1. An article of furniture consisting in the combination of a board which is cut away or recessed to receive wash basins, soap dishes, glasses or the like, a tray adapted to be supported at a desired inclination to form a reading desk when it is not required to use the article for washing purposes, or to be folded down to cover these cut away portions when it is desired to use the article as a table, and folding legs supporting the board member hinged to the board in such manner that when desired they may be folded flat parallel to this member, substantially as described.

2. An article of furniture as claimed in Claim 1 characterised by the provision of racks on the table to carry brushes or the like.

3. An article of furniture as claimed in Claims 1 or 2, characterised by the provision of brackets, preferably adjusted to carry a mirror and if desired also shaving or like accessories.

4. An article of furniture as claimed in any of the preceding claims characterised by the provision of brackets adapted to carry a lamp or like at an adjustable inclination.

5. An article of furniture constructed and arranged to operate substantially as described with reference to the accompanying drawings.

Dated this 2nd day of December, 1913.

For the Applicant,
W. P. THOMPSON & Co.,
6, Lord Street, Liverpool, and at
Bradford and London,
Chartered Patent Agents.

Redhill: Printed for His Majesty's Stationery Office, by Love & Malcomson, Ltd.—1914.

D7/553
D7/
553.4
GREAT BRITAIN DEC. 2,
#13,007 AD 1913

( 1 SHEET )

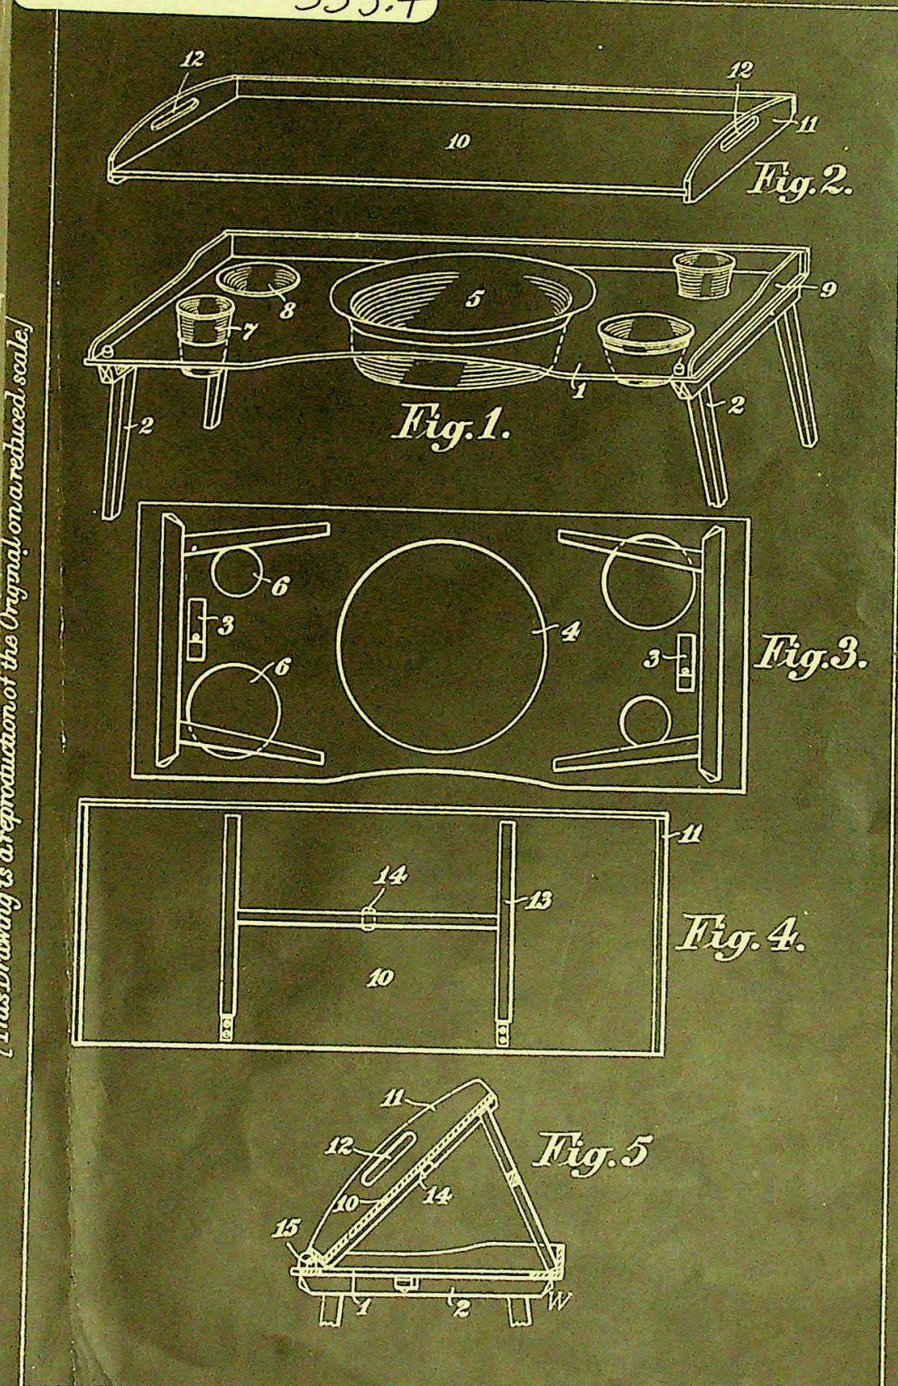


[This drawing is a reproduction of the Original on a reduced scale.]

Malby & Sons, Photo-Litho.

Dec. 7, 1929 French

[redacted] 92

D7/553.4

N° 677.125 M. Abramov Pl. unique

65/53-6

Fig. 1.

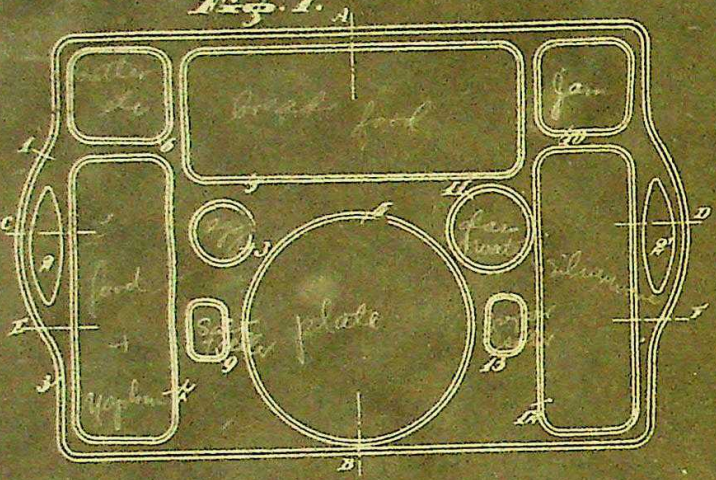


Fig. 2.



Fig. 3.

Fig. 4.



D7/553.4

Page 25 Premium Practice of June 1937.

# THIS *ALPHIDE* SERVING TRAY

*offers you Beauty, Utility and Pulling Power at*

**LOW COST!**

*This serving tray is typical of the values possible in Alphide. Easy to hold in one hand, leaving the other hand entirely free, it is just what the smart hostess has long wanted—an individual service with coaster, ash tray, spoon rest, food tray in one compact, easy-to-handle unit.*

• ALPHIDE PLASTIC gives you beauty and a wide variety of designs at low cost. It is manufactured in pure white, cream, ivory, grey, lemon yellow, orange, turquoise or azure blue; or any solid color or mottled true marble effects. It can be had in high gloss, dull or satin finish. • Because Alphide is a cold molded product, tool charges are extremely low, enabling you to procure fine plastic effects with a low premium allowance. Alphide articles can be produced in light or heavy weight at moderate prices. We do not make rods, sheets, or tubes, but solicit custom molding. • Investigate this new premium economy at once. A number of Alphide articles are available for premium use, or, if you prefer, we can submit plans for a winning premium item. Write to

## STANDARD PLASTICS CORPORATION

**Broadway and Wales Sts.** **Jersey City, N. J.**

07/553.4

MODERN PLASTICS ENCYCLOPEDIA
9-1959
p. 239

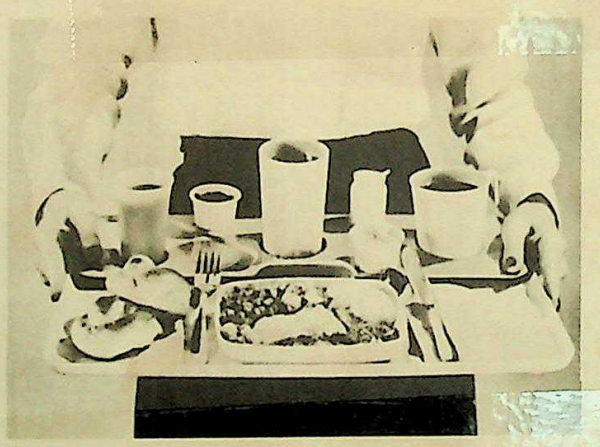

BAKELITE C-11 styrene-acrylonitrile copolymer is ideally suited for molding airline serving trays. The unique properties of C-11 result in reduced breakage and the elimination of serving utensils that are excessively hot. C-11 possesses exceptional chemical and impact resistance and can be molded in a wide range of colors.

D7 · 553.4

Giftwares

March 1961

Page 14

3rd row, left panel

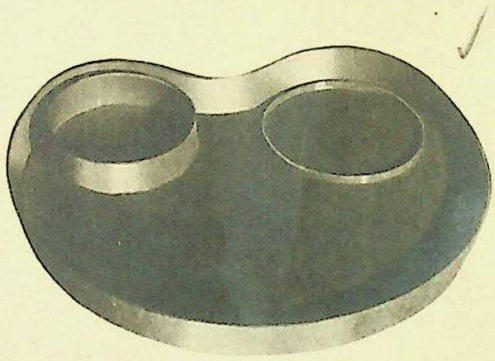

Partie Plates, retailing at $3.95 set of 4, boxed, are made of Melmac plastic and come in pastel colors. Box serves as point-of-sale display. Plates can go into dishwashers. R. A. Miller Industries, 1525 Marion St., Grand Haven, Mich.

D7/553.4

# Original Designs

## by ERNEST SOHN

## ENAMELS on COPPER

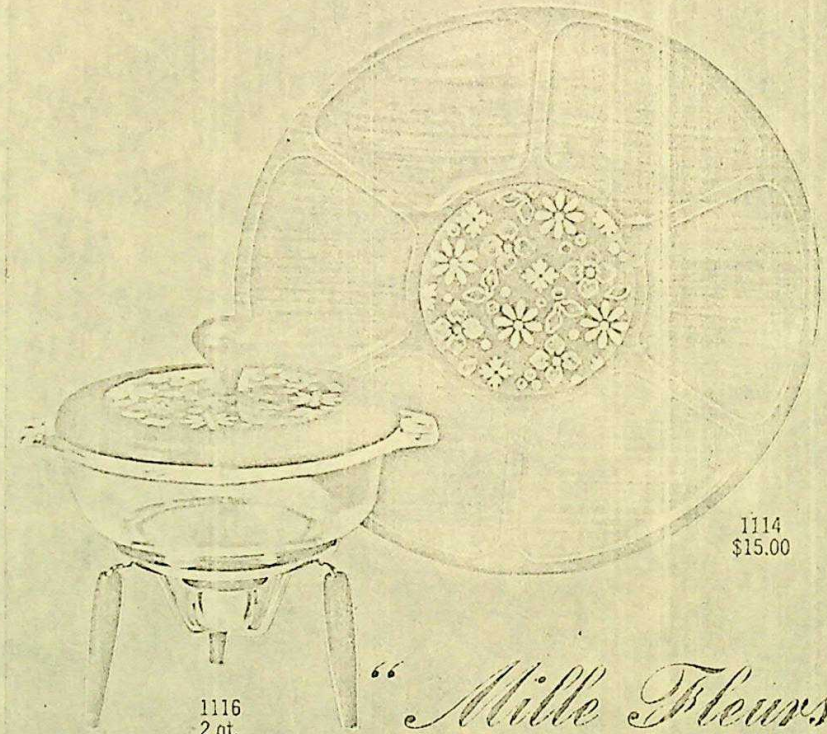

1114
$15.00

1116
2 qt.
$14.00

"Mille Fleurs"

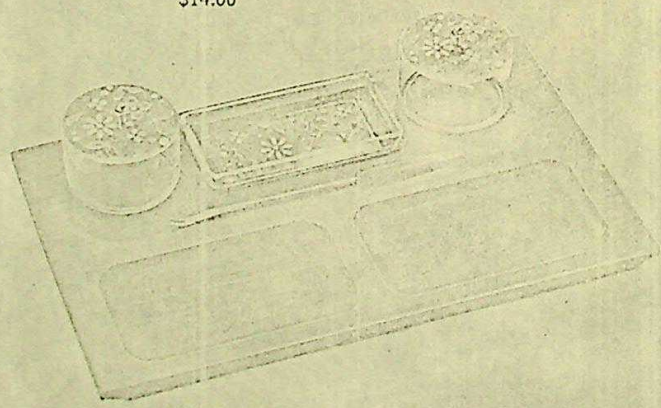

1127
$16.00
12½" x 20"

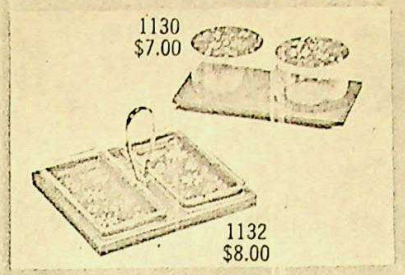

1130
$7.00

1132
$8.00

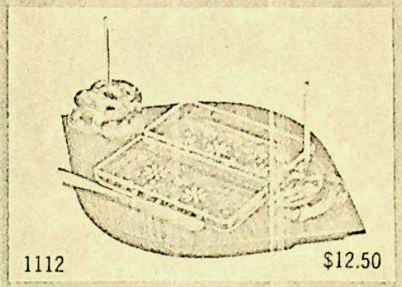

1112 $12.50

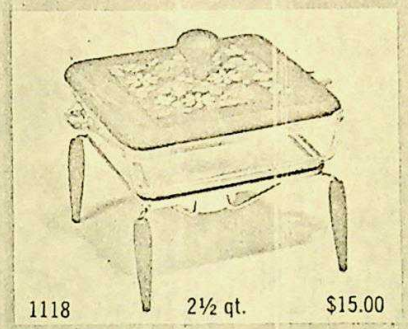

1118 2½ qt. $15.00

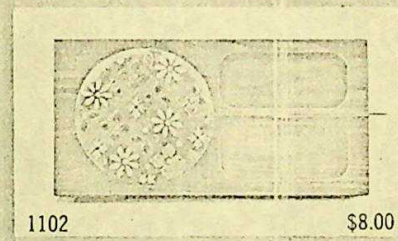

1102 $8.00

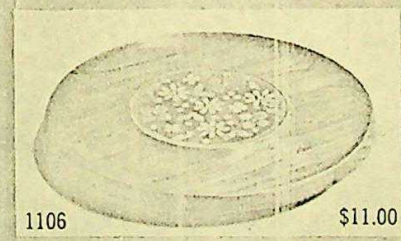

1106 $11.00

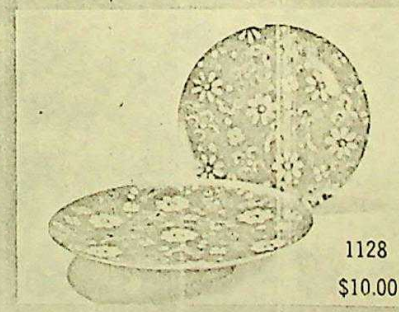

1128
$10.00

1101 $6.50

PRICES ARE SUGGESTED RETAIL SUBJECT TO USUAL TRADE DISCOUNTS

F.O.B. FACTORY, ELMHURST, L. I., N. Y. MINIMUM ORDER: $75.00

**Jack Orenstein Associates, Inc.**

225 Fifth Avenue New York 10, N.Y.

LOS ANGELES: 527 West 7th Street DALLAS: Trade Mart ATLANTA: Merchandise Mart

Exclusive Representative of ERNEST SOHN CREATIONS, INC.

92
#1,003,100
FRANCE
D7-553.5

M. Hinte

Pl. unique

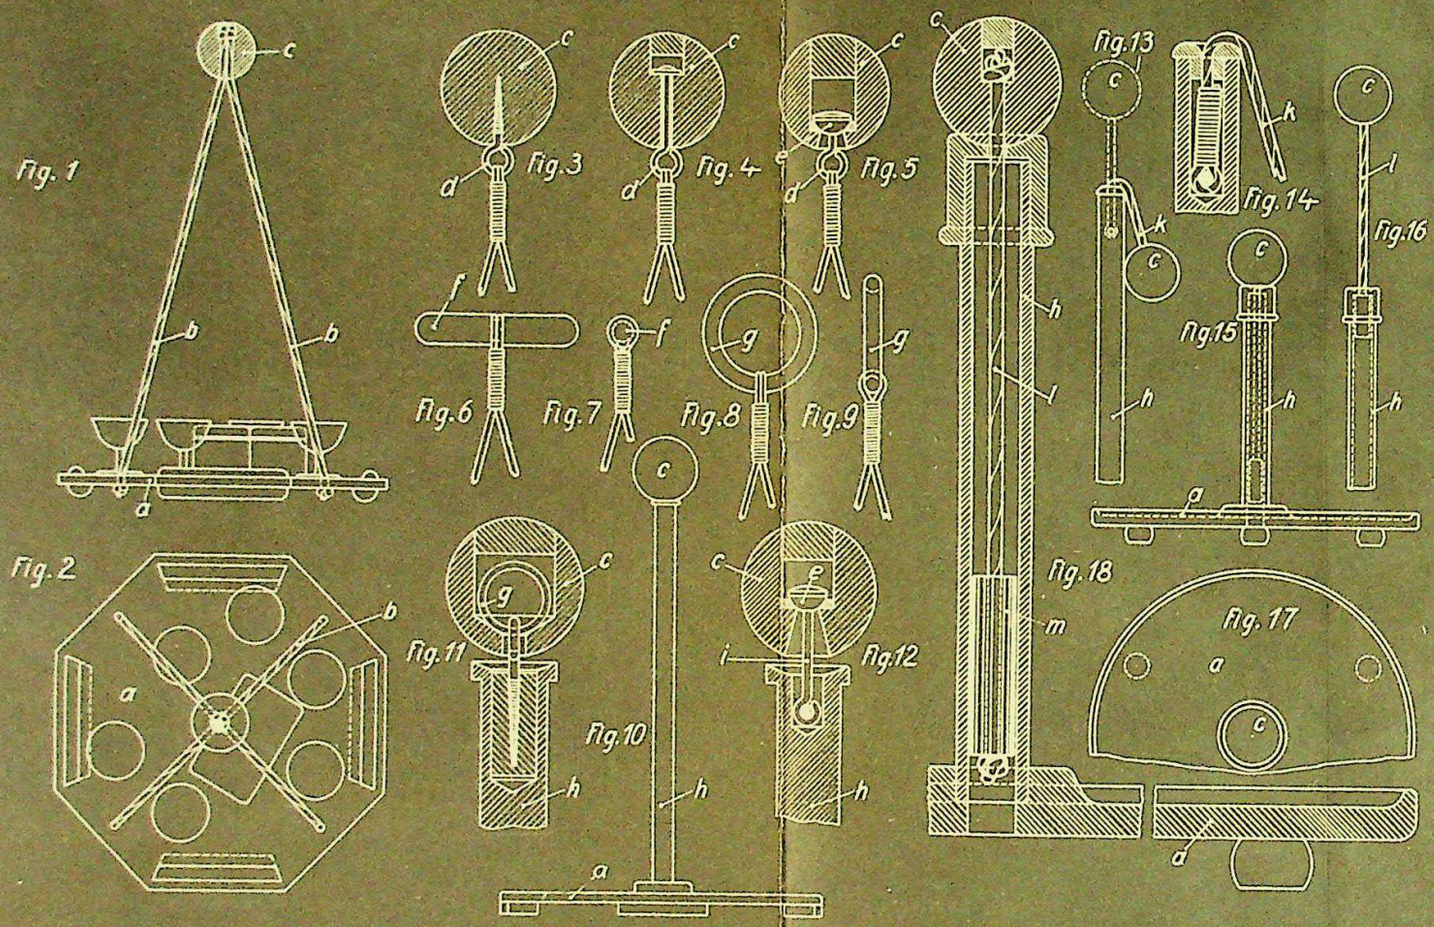

RÉPUBLIQUE FRANÇAISE

MINISTÈRE
DE L'INDUSTRIE ET DU COMMERCE

SERVICE
de la PROPRIÉTÉ INDUSTRIELLE

# BREVET D'INVENTION

Gr. 9. — Cl. 3.

N° 1.003.100

JUN 4 1952

## Plateau à servir.

M. GUSTAV HINTE résidant en Allemagne.

**Demandé le 4 décembre 1946, à 13h 37m, à Paris.**
Délivré le 14 novembre 1951. — Publié le 13 mars 1952.

*(Brevet d'invention dont la délivrance a été ajournée en exécution de l'article 11, § 7, de la loi du 5 juillet 1844 modifiée par la loi du 7 avril 1902.)*

Le plateau à servir destiné à recevoir des boissons, des plats, de la vaisselle ou autres, est en général porté avec les deux mains. Toutefois, on doit pouvoir libérer une main pour la mise en place ou l'enlèvement d'objets ainsi que pour ouvrir ou fermer des portes ou autres. A cet effet, on pose le plateau avec une main sur l'avant-bras. Lors de cette opération, il n'est pas toujours possible de faire suffisamment attention à la position du plateau de telle façon que les objets à servir tombent fréquemment. Ceci est notamment le cas lors d'une circulation dense.

L'invention a pour résultat de maintenir le plateau toujours en position horizontale. En outre lorsque le plateau reçoit un choc, les objets portés ne glissent pas, étant donné que le plateau s'efface devant le choc et n'offre qu'une faible résistance.

A cet effet, le plateau est suspendu d'une manière oscillante, ce qui peut être effectué de différentes façons.

Plusieurs modes de réalisation sont représentés aux dessins annexés, dans lesquels :

Les fig. 1 et 2 représentent le mode de réalisation le plus simple. Le plateau *a* est porté par quatre cordes *b* réunies à leur extrémité supérieure par un nœud à l'aide d'un bouton sphérique *c*. Le plateau est porté à l'aide de ce bouton.

Les fig. 3 et 4 montrent une construction similaire avec cette différence que la suspension des cordes est réalisée dans des œillets *d* fixés dans le bouton *c*. De cette façon, la suspension oscillante du plateau est favorisée. La suspension oscillante est encore plus marquée sur la fig. 5, où l'œiller *d* porte une demi-sphère *e* qui tourillonne dans le bouton *c* de façon à pouvoir exécuter des mouvements dans tous les sens.

Sur les fig. 6 et 7, la suspension est réalisée à l'aide d'un garrot *f*, tandis que les fig. 8 et 9 montrent la suspension à l'aide d'un anneau 9.

Suivant une autre variante représentée sur les fig. 10 et 11, le plateau *a* est porté par une tige *h*. Ici, aussi, on a prévu un bouton *c*, ce bouton étant creux et recevant dans sa partie interne l'anneau *g* de façon telle que celui-ci peut suivre tous les mouvements. La fig. 12 montre une construction similaire dans laquelle tourillonne une demi-sphère *e* suivant le mode représenté à la fig. 5. Cette demi-sphère est reliée à la tige *h* à l'aide d'un boulon articulé *i*.

Sur les fig. 13 et 14, la suspension de la tige *h* sur le bouton *c* est réalisée à l'aide d'une courte corde *k* sur laquelle peut osciller le plateau. La fig. 14 est un agrandissement de la représentation de la fig. 13.

Les fig. 15 à 18 comportent une tige creuse à l'intérieur de laquelle glisse une corde *l* munie d'un poids *m*. Cette corde se termine dans le bouton *c* dans lequel elle est fixée. Lorsque le plateau est posé, la corde est descendue de telle façon que le bouton *c* se pose sur l'extrémité de la tige. Bien entendu, on pourrait utiliser un ressort de rappel à la place d'un poids.

### RÉSUMÉ.

L'invention est relative à un plateau à servir, remarquable, notamment, par les caractéristiques suivantes considérées séparément ou en combinaison.

*a*. Le plateau comporte une suspension oscillante disposée dans son axe central.

*b*. La suspension est formée à l'aide de trois ou plusieurs cordes ou autres moyens de traction reliés à leur extrémité supérieure par un nœud.

*c*. Le nœud est réalisé à l'aide d'un œillet disposé dans un bouton, soit d'une manière fixe, soit à l'aide d'une rotule.

*d*. Le nœuf est réalisé à l'aide d'un anneau.

*e*. L'anneau peut pivoter ou osciller dans le bouton.

*f*. La suspension est réalisée à l'aide d'une

**Prix du fascicule : 100 francs.**

1 - 02156

tige montée dans l'axe central du plateau et portant un bouton à son extrémité supérieure.

*g*. Le bouton relié à la tige porte, dans un évidement un corps sphérique reposant dans celui-ci de façon à pouvoir pivoter et osciller.

*h*. La tige est reliée au bouton à l'aide d'une corde.

*i*. La tige forme un tube creux dans lequel la corde de suspension est rappelée par un poids ou la traction d'un ressort.

GUSTAV HINTE.

Par procuration :

H. GOUVERNAL.

Pour la vente des fascicules, s'adresser à l'IMPRIMERIE NATIONALE, 27, rue de la Convention, Paris (15e).

07/553.5

# Science Discovered It . . .

## Si Lite

PRESENTS A REVOLUTIONARY, NEW BOILABLE COMPARTMENT TRAY

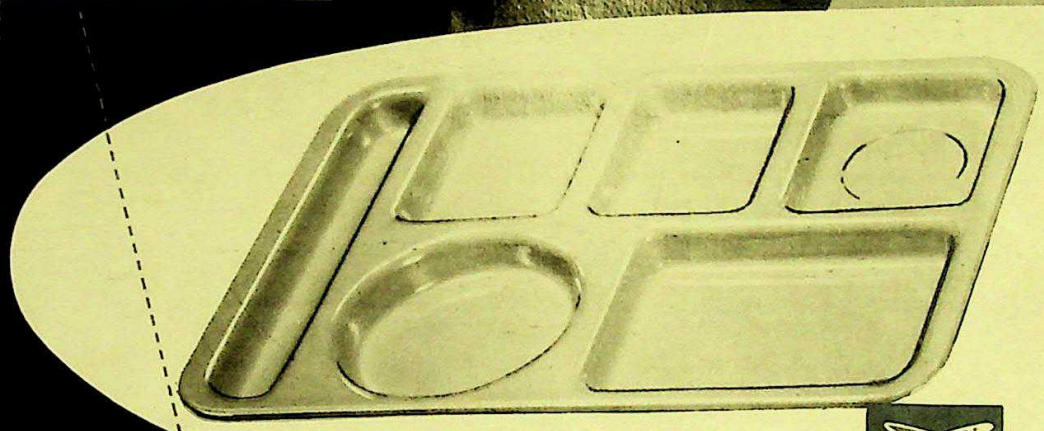

SIZE 14" x 10"

CYMAC METHYLSTYRENE PLAST BOILABLE

## Si Lite's NEW "CONTOUR-MOLDED" COMPARTMENT TRAYS

made of CYMAC®-201 Acrylonitrile-Methylstyrene Plastic . . .

**Makes all other compartment trays old-fashioned.**

Now you can enjoy all the advantages of compartment trays plus the many additional profitable benefits CYMAC brings.

## ✔ Check these features:

✔ **HEAT RESISTANT**—Si Lite trays are BOILABLE, permits faster washing and handling through any commercial washer. Positively will not lose shape or color.

✔ **DURABLE**—Si Lite trays slash replacement costs because they have longer life . . . greater composition strength to withstand hard usage . . . practically indestructible.

✔ **FUNCTIONAL DESIGN**—Si Lite trays are carefully engineered for even weight distribution and proper food compartment arrangement. High-styled for distinctive appearance in 4 most pleasing colors, BUFF TAN, MINT GREEN, PALE CORAL, PASTEL YELLOW.

✔ —Si Lite trays' hard surface [illegible] acids or alkalis. Sparkling new [illegible] after every use.

[illegible] LITE COMPARTMENT TRAYS [illegible] DESIRABLE SPECIFICATI[illegible]

at a lower [illegible]

## Si Lite

2511-31 W. 18th STREET
CHICAGO 8, ILL.

*Trays • Bowls • Tumblers • Dish Boxes*

[illegible]ted in U.S.A.

Restaurant Equipment Dealer
July 1958

(73)

07/553.5

Giftwares

March 1961

Page 14

second row, second panel from left

Chateau series in Woodland line includes brown-glaze ceramic dip bowls and tiles with walnut. Line is $6-$14 ret. Georges Briard, 225 Fifth Ave., N. Y.

07/553.5

Tableware June 1963 P. 446

Oneidacraft have introduced a new design in canteens. Known as the Aragon canteen it is made in Afromosia along modern lines, and lined in attractive tangerine material. 28

This unusual and interesting goblet is imported by Stewart & Corbett. It is made in Spain and is silver plated and the stem is in the figure of an ancient Egyptian. 29

A vase by the Danish designer, Bjorn Wiinblad, from Rosenthal China (London) Ltd. 30

Vase candlesticks in glass by Riedel of Bavaria, also from Rosenthal. 31

A meat carving board. In teak, it comes complete with carving knife and fork, which fit into their own compartments. Also, right, a teak cheese and biscuit board with two cheese knives. Both are made by Lumos & Co. Ltd. 32

28

29

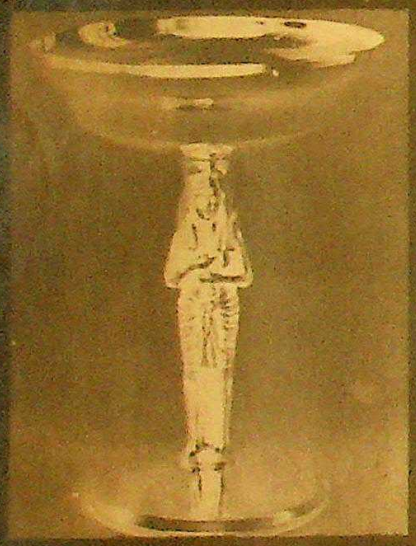

30

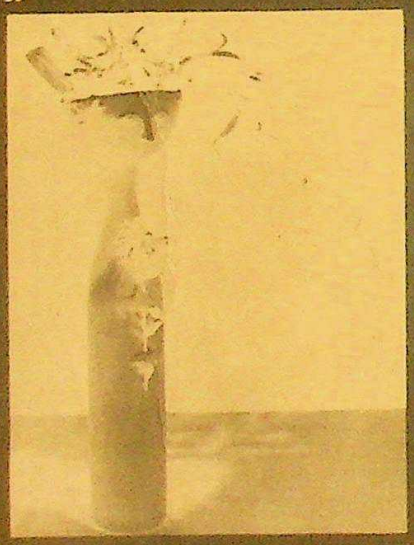

31

32

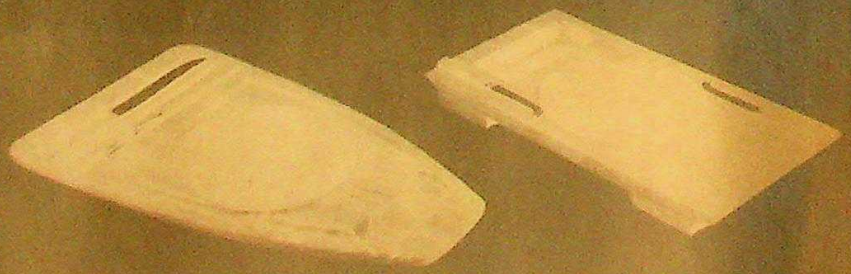

D7-[illegible] 5535

**OBLONG ONLY — 6 sizes**

- 24 color-and-pattern combinations
- 17 separate layers give many years of added use
- Clean-easy, satin-smooth surface
- Lightweight, noiseless, easy to handle
- Will not warp, split or stain
- Washable in mechanical dishwashers*
- Great drop- and heat-resistance
- Rounded edges minimize chipping

* Recommended temp. 180°F

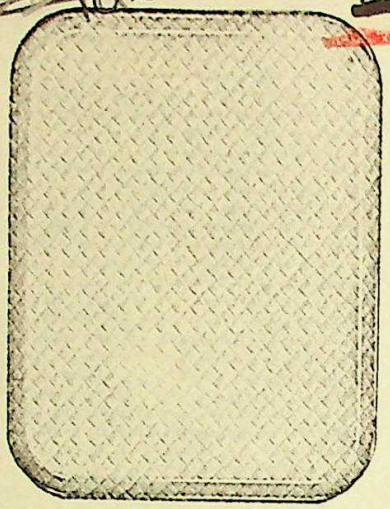

BASKETWEAVE Green



Red Blue Grey Yellow Tan

| OBLONG ONLY | | Packed |
|---|---|---|
| No. 810 | 9⅞″ x 8″ | 2 doz. per carton |
| No. 1014 | 13⅞″ x 10¾″ | 1 doz. per carton |
| No. 1216 | 16½″ x 12⅛″ | 1 doz. per carton |
| No. 1418 | 18⅛″ x 14⅛″ | 1 doz. per carton |
| No. 1520 | 20¼″ x 15⅛″ | 1 doz. per carton |
| No. 1622 | 21¾″ x 15¾″ | 1 doz. per carton |

| PATTERNS | COLORS |
|---|---|
| Basketweave | Red, Blue, Green, Grey, Yellow, Tan |
| Fine Linen | Red, Blue, Green, Grey, Yellow, Tan |
| Irish Linen | Red, Blue, Green, Grey, Tan |
| Frost | Red, Blue, Green, Grey, Yellow |
| Mahogany | Blonde |
| Myth | Charcoal |

**NOTE:** IN ORDERING, SPECIFY EXACT SIZE, COLOR AND PATTERN.

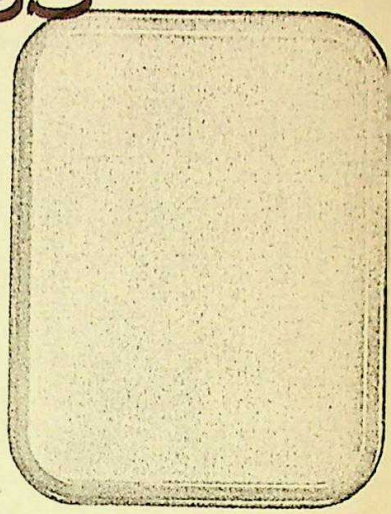

IRISH LINEN Blue



Red Green Grey Tan



FROST Grey



Red Blue Green Yellow

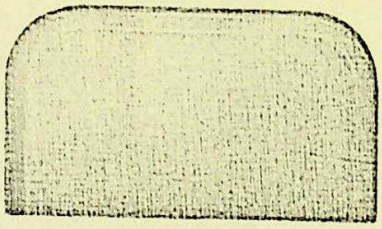

FINE LINEN Red



Blue Green Grey Yellow Tan



Blonde Mahogany



Charcoal Myth

## SPECIAL PLASTIC TRAYS

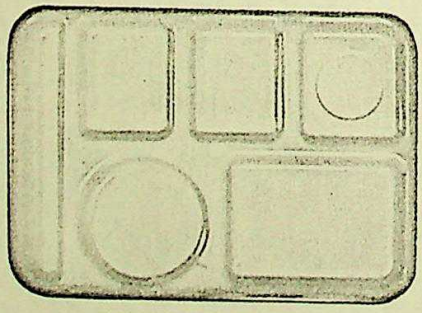

6-COMPARTMENT TRAY
Coral

Yellow

Foam Green

Desert Tan

No. T-150-I CARAFE TRAY 11″ Round—White Moire, Grey, Coral, Turquoise (matches No. 2001 Carafe).

No. T-810-I MONITOR TRAY 8 x 10 Oblong—White, Grey, Coral, Turquoise (to match Carafe). Also: Light Blue, Foam Green, Yellow, Desert Tan.

No. T-1216-I MONITOR TRAY 12 x 16 Oblong—Coral, Yellow, Light Blue, Foam Green, Desert Tan.

No. T-113-I MONITOR 6-Compartment 10 x 14 Oblong — Coral, Yellow, Foam Green, Desert Tan.

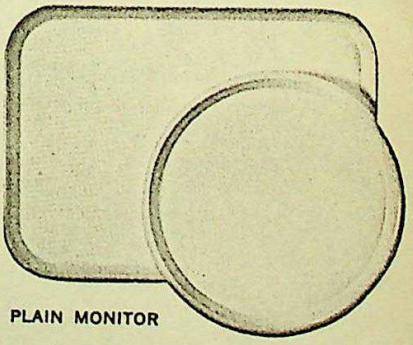

PLAIN MONITOR

p. 34 Rest. Equip. Dealer 10/63

XD 7/553.5


# sales information file

These facts will help you sell

## ARROWHEAD COMPARTMENT TRAYS

The reason we offer so many models makes dollars and sense.



For the customers who want the silverware compartment on the left, you have Arrowhead's ARR 140. (Stacks with Texasware 146, but it's heavier and longer wearing.)



For those who prefer the silverware on the right, there's the ARR 141. (Stacks with Dallasware P 71.)



If they want a labor saving tray that stacks either way and is portion controlled for type A lunches (no other tray like it), choose the Type A Tray.



For Nursing Homes and senior high schools, there's the adult size (12" x 16" not 10" x 14") tray.



And for the bargain hunters, we have the extra low priced (Yes, it's melamine and heavy duty) KL 113!

Full line of complementary bowls, cups, etc. *and* immediate delivery.

Write for samples.

ARROWHEAD

2600 NORTH PULASKI ROAD
CHICAGO, ILLINOIS 60639

Circle 3 on Reader Service Card



RESTAURANT EQUIPMENT DEALER

Published by

C-M PERIODICALS, INC.

B. P. Mast, *Chairman of the Board*
Harvey Conover, *President*
R. A. Gagney, *Secretary*
A. V. McLoughlin, *Controller*
L. R. Kingsland, *Publishing Director*
Jack Glenn, *Editorial Director*

EDITORIAL AND EXECUTIVE OFFICES

1 West Elm St., *Greenwich, Conn.* 06830 (203) 869-2270

BRANCH OFFICES

*Chicago, Ill. 60611*—737 North Michigan Ave. (312) WH 4-6612.
*Beverly Hills, Calif. 90211*—8500 Wilshire Blvd. (213) OL 5-9580 Glenn Dobyns
*Jacksonville, Fla. 32217*—4022 University Blvd. West. (305) 733-4800. Clarence Bracey, Clark Bloom.

Member NAFEM, MAPEI

C-M PERIODICALS, INC.

is a division of

CMM

CONOVER-MAST PUBLICATIONS, INC.

which also publishes

VOLUME FEEDING MANAGEMENT; BOATING INDUSTRY; CONOVER MAST PURCHASING DIRECTORY; CONSTRUCTION EQUIPMENT AND MATERIALS; ELECTRO-TECHNOLOGY; FOOD TOPICS; INTERNATIONAL SCIENCE & TECHNOLOGY; MILL & FACTORY; PURCHASING; SPACE AERONAUTICS

SUBSCRIPTION, CORRESPONDENCE, AND CHANGE OF ADDRESS: Write to Circulation Department, Restaurant Equipment Dealer, 1 West Elm St., Greenwich, Conn. 06830. Please give title and company affiliation in all correspondence. Notify us promptly of any change of address. Be sure to give old as well as new address; include postal zip code number, new company name and title. Enclose address label from a recent issue, if possible. Please allow 3 weeks for change. Subscription rates: one year $[illegible], single copy, $1.50. Canada and Foreign: one year, $[illegible], single copy, $[illegible]. RESTAURANT EQUIPMENT DEALER is published monthly by C-M Periodicals, Inc. Manuscripts, cartoons and photos accompanied by sufficient postage for their return are submitted at the owner's risk. Articles published in this magazine represent the opinion of the authors, not necessarily the opinion of the magazine.


© C-M Periodicals, Inc. [illegible]. Entire contents fully restricted [illegible] Periodicals, Inc. [illegible] West Elm St., Greenwich, Conn. 06830. Printed at [illegible] Printing Co., Sheepsheadville, Ky.


Controlled circulation postage paid Sheepsheadville, Ky.

D7- 553.5 XR

A.U. 293

2-1968

1103185 COMPLETE SPECIFICATION

2 SHEETS *This drawing is a reproduction of the Original on a reduced scale*

Sheets 1 & 2

#1,103,185 GREAT BRITAIN

Fig. 4.

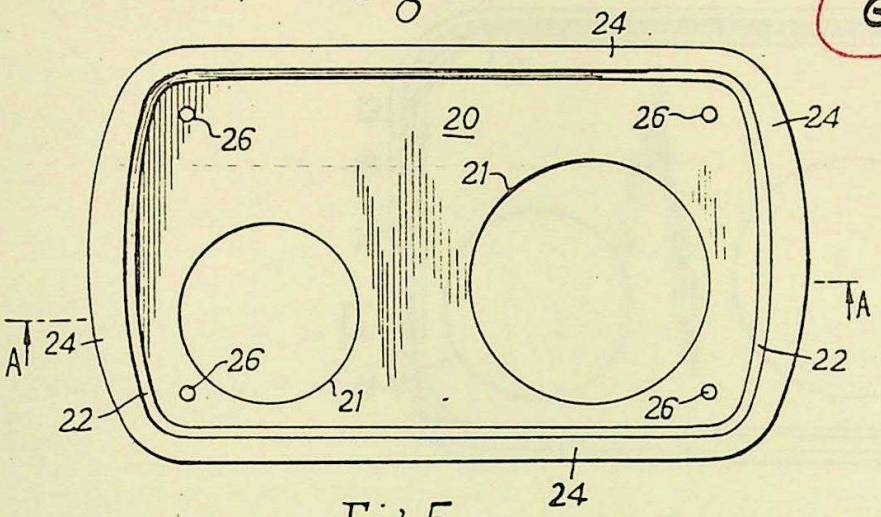


Fig. 5.




Fig. 6.

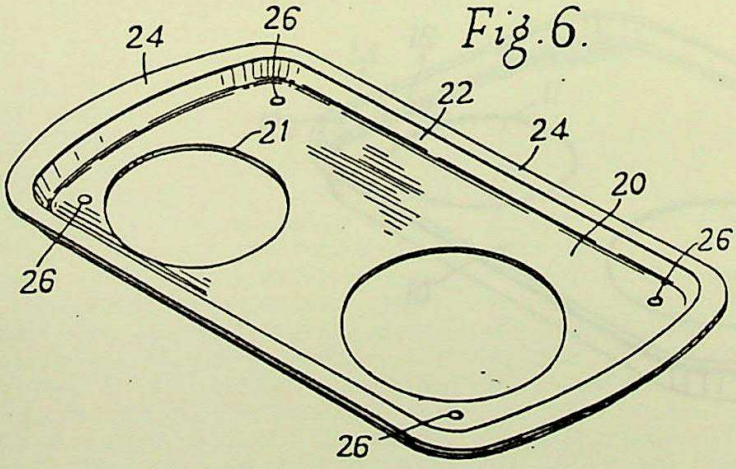


from 220/562 X in D1/549

1,103,185
GT. BRIT.

Fig. 1.

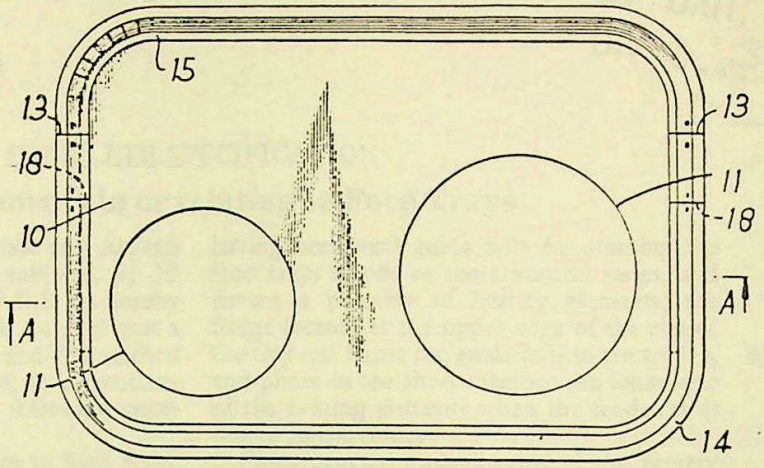


Fig. 2.

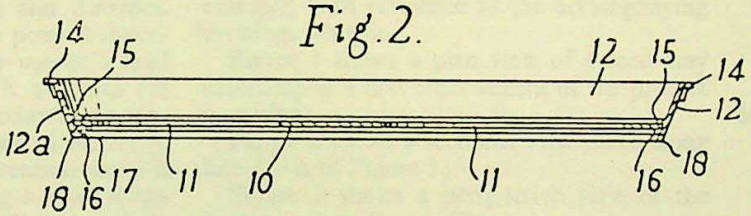


Fig. 3.

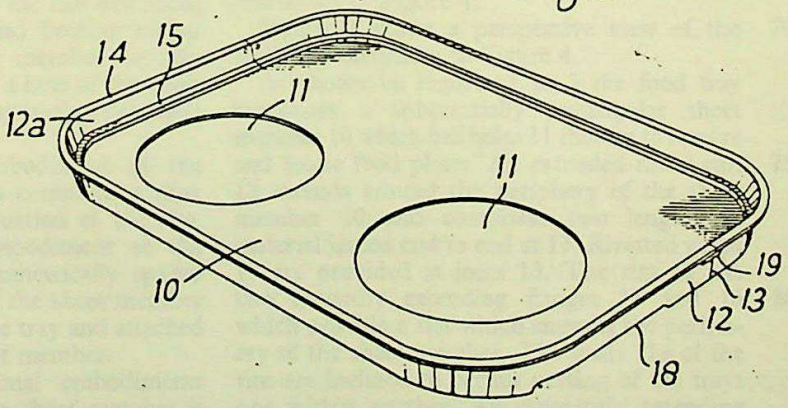

# PATENT SPECIFICATION

DRAWINGS ATTACHED

**1,103,185**

1,103,185

*Date of filing Complete Specification: 13 May, 1966.*
*Application Date: 14 May, 1965.* *No. 20509/65.*
*Complete Specification Published: 14 Feb., 1968.*
*© Crown Copyright 1968.*

GT. BRIT.
DIV. 310
220

**Index at acceptance:—A4 AC5B**

**Int. Cl.:—A 47 g 23/06**

COMPLETE SPECIFICATION

## Improvements in or relating to Food Trays

We, CYRIL HARRY BLACKBURN and ALFRED HARRIS BODY, both British subjects, of 10 Gray's Inn Road, London, W.C.1, do hereby declare the invention for which we pray that a patent may be granted to us, and the method by which it is to be perfermed, to be particularly described in and by the following statement:—

The present invention relates to food trays, and its object is to provide a tray that is suitable for serving meals in hospitals and canteens. The food tray according to the present invention is particularly suitable for use in a food trolley which is provided with a means for heating the food and which is adapted to contain a plurality of such trays nested vertically.

According to the present invention there is provided a food tray comprising a sheet member having one or more holes therein each to receive and locate a food plate, a rim extending along the periphery of the sheet member, the walls of the rim being inclined to permit nesting of trays one within another, a flange located at the upper edge of the rim extending outwardly from the rim, and bearing means projecting below the sheet member so that when a food plate located in a hole of the sheet member it will not contact any surface on which the tray is placed.

According to a first embodiment of the invention the bearing means comprises a skirt portion formed as a continuation of the rim. According to a second embodiment of the invention four feet are symmetrically spaced one adjacent each corner of the sheet member and made separately from the tray and attached to the lower face of the sheet member.

According to constructional embodiments of the present invention the sheet member is flat and substantially rectangular. The rim may be formed from two lengths of material joined end to end or formed integral with the sheet member.

The food tray according to the invention is particularly suitable for use in a food trolley having horizontal guide rails for stacking the food trays in one or more vertical series, and having a plurality of heating elements, the flange located at the upper edge of the rim of the tray can locate the guide rails in the trolley, and plates in the sheet member can locate one of the heating elements when the food tray is placed in the trolley.

Constructional embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings wherein:

Figure 1 shows a plan view of a food tray according to a first embodiment of the present invention:

Figure 2 shows a sectional view taken along line A—A of Figure 1;

Figure 3 shows a perspective view of the food tray according to Figure 1;

Figure 4 shows a plan view of a food tray according to a second embodiment of the present invention;

Figure 5 shows a sectional view taken along line A—A of Figure 4;

Figure 6 shows a perspective view of the food tray according to Figure 4.

As shown in Figures 1 to 3 the food tray comprises a substantially rectangular sheet member 10 which has holes 11 therein to receive and locate food plates. An extruded metal rim 12 extends around the periphery of the sheet member 10 and comprises two lengths of material joined end to end at 13. Rivetted strips 19 are provided at joins 13. The rim 12 has two inwardly extending flanges 15 and 16 which provide a slot which engages the periphery of the sheet member. The walls 12*a* of the rim are inclined to permit nesting of the trays one within another. An outwardly extending flange 14 is provided at the upper edge of the rim 12. The rim 12 has a bearing surface in the form of the lower edge of a skirt portion 17 formed as a continuation of the rim. The skirt portion 17 is preferably about 0.2 to 0.3 inches below the lower flange and has gaps 18

cut therein at the short sides to allow plates in the sheet member 10 to locate a heating element when the food tray is placed in a trolley. The gaps 18 are in line with each other and with the holes 11. The gaps 18 preferably extend from the bottom edge of the skirt portion 17 to almost the lower flange. The gaps preferably extend from near one long edge of the tray to about one third to one half the width of the tray. The food tray according to Figures 1 to 3 is suitable for mass production processes, the finished tray comprising two major parts, namely the rim and the sheet member, which could be manufactured and worked separately. The final process thus being the attachment of the rim to the sheet member. The rim could be made from a single length of material or from more than two lengths of material as shown in the drawings. The joins 13 in the rim may be secured by means other than the rivetted strips 19, for instance they could be welded or glued.

As shown in Figures 4 to 6 the food tray comprises a substantially rectangular sheet member 20 which has holes 21 therein to receive and locate food plates. A rim 22 extends around the periphery of the sheet member 20. The walls 23 of the rim 22 are inclined so as to permit nesting of the trays one within another. An outwardly extending flange 24 is provided at the upper edge of the rim 22. Cylindrical feet 25 are provided on the lower face of the sheet member 20 so that their lower surfaces constitute a bearing surface for the tray. The feet 25 may be secured to the sheet member 20 by means of rivets 26 or by any other suitable method. The feet 25 are preferably arranged symmetrically on the sheet member 20 with one of the feet adjacent each corner of the sheet member.

The food tray according to Figures 4 to 6 could be made advantageously from a synthetic plastics material. The food tray could be formed from a single piece of material which could be pressed into shape by conventional techniques. Thereafter the holes 21 could be cut into the sheet member 20 and the feet 25 which are made separately from the tray are attached thereto. The feet could also be made from a synthetic plastics material.

The food tray according to both constructional embodiments is particularly suitable for stacking in a food trolley having horizontal guide rails.

The flanges 14, 24 can locate the guide rails of the trolley and a plurality of food trays could be nested in one or more vertical tiers. The food trolley preferably has heating elements which locate plates in the sheet member.

The heating elements are preferably arranged so that they each locate at least one plate in the sheet member of a tray and lift it, or them clear of the tray. If desired one plate in a tray may be heated whilst another remains cold.

The food tray according to both constructional embodiments has a bearing surface; in one case the skirt portion 17, in the other case the feet 25, which ensures that food plates located in the sheet member will not contact any surface onto which the tray is placed. This is particularly desirable when the food plates are hot and would be likely to damage a heat-sensitive surface onto which the tray is put.

In the example above described the tray has two holes but it may have only one hole or may have more than two holes.

WHAT WE CLAIM IS:—

1. A food tray comprising a sheet member having one or more holes therein each to receive and locate a food plate, a rim extending along the periphery of the sheet member, the walls of the rim being inclined to permit nesting of trays one within another, a flange located at the upper edge of the rim extending outwardly from the rim, and bearing means projecting below the sheet member so that when a food plate is located in a hole in the sheet member it will not contact any surface onto which the tray is placed.

2. A food tray as claimed in claim 1, wherein the bearing means is a skirt portion formed as a continuation of the rim.

3. A food tray as claimed in claim 2 wherein the rim is provided with two inwardly extending flanges which form a slot for engaging the periphery of the sheet member.

4. A food tray as claimed in claim 3 wherein gaps are cut into the skirt portion to allow plates located in the sheet member to contact heating means said gaps extending from the bottom edge of the skirt portion to almost the level of the lowest flange.

5. A food tray as claimed in any one of claims 1 to 4 wherein the rim is formed from a length of material having its ends abutting.

6. A food tray as claimed in any one of claims 1 to 4 wherein the rim is formed from a plurality of lengths of material joined end to end.

7. A food tray as claimed in any one of the claims 1 to 6 wherein the sheet member is flat and substantially rectangular.

8. A food tray as claimed in any one of the claims 2 to 7 and made from metallic material.

9. A food tray as claimed in claim 1 wherein the bearing means consist of feet made separately from the tray and attached to the lower face of the sheet member.

10. A food tray as claimed in claim 9, wherein the sheet member is flat and substantially rectangular.

11. A food tray as claimed in claim 10, wherein four feet are provided, one adjacent each corner of the sheet member.

12. A food tray as claimed in claim 11 wherein the feet are cylindrical.

13. A food tray as claimed in any of claims 9 to 12 and made (apart from the feet) of a one-piece moulded synthetic plastics material.

14. A food tray substantially as described

with reference to either of the embodiments shown in the accompanying drawings.

15. A plurality of food trays as claimed in any of claims 1 to 14 in combination with a food trolley, having horizontal guide rails for stacking food trays in one or more vertical series and having a plurality of heating elements wherein said guide rails in the trolley are capable of locating on the said flange, and, wherein plates in the sheet member can locate one of the heating elements when the lowermost food tray of the stack is placed in the trolley so that when said food tray is placed on the trolley said element locates a plate in said food tray and causes the plate to be raised from said tray so that the plate no longer contacts said tray.

For the Applicants:
MATTHEWS, HADDAN & CO.,
Chartered Patent Agents,
31/32 Bedford Street,
Strand, London, W.C.2.

Printed for Her Majesty's Stationery Office by the Courier Press, Leamington Spa, 1968.
Published by the Patent Office, 25 Southampton Buildings, London, W.C.2, from which copies may be obtained.

design reduced tooling costs by
e rather than the steel materials
odels. Because of the reduced
styling changes are less limited. Rigid ure-
ne cover, steel platform and base.
gn: Steve Unger Design, S. Unger.
nt: Borg Erikson Corporation.

tray and tumbler set is inexpensive and
kable. Raised filleted edge retains spills and eat-
ensils; raised edge around plate area will sup-
and position paper plate if desired. Styrene.
gn: Client's staff, T. Bell.
nt: Fesco Operations, Cities Service Company.

20
PS pulsating feminine douche / bidet works directly off bathroom faucets eliminating need for electricity and a water reservoir. The faucet adapter is integral and designed to reduce number of parts. Designers developed adaptor, eliminating need for expensive plumbing attachments. Cycolac.
Design: Lee Payne Industrial Design Inc., L. Payne, V. Gambello.
Client: Pulsatron Corporation.

21
Cutlery features polycarbonate handles which provide a high degree of toughness, resistance to chemicals encountered in the kitchen and dishwashing machine, and high heat resistance. Extensive research led to handle design that is comfortable thus reducing fatigue and increasing safety. Polycarbonate handle, stainless steel blade.
Design: Don Wallance; client's staff, W. Hublitz.
Client: H.E. Lauffer Company Inc.

INDUSTRIAL DESIGN p. 51
DECEMBER, 1973

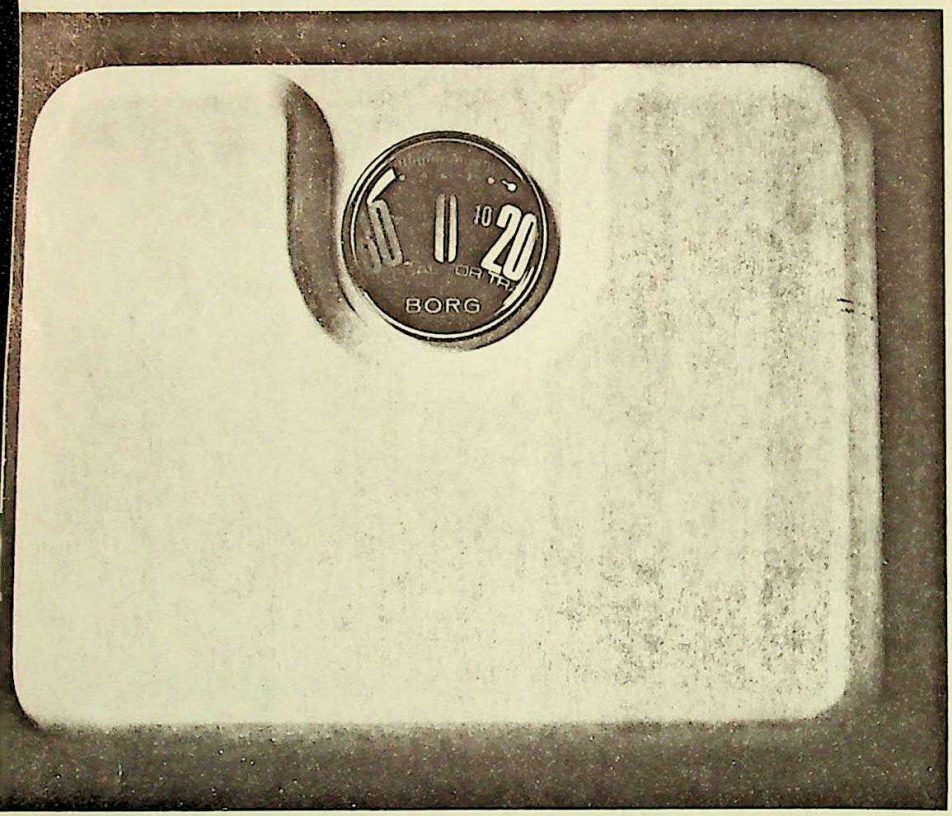


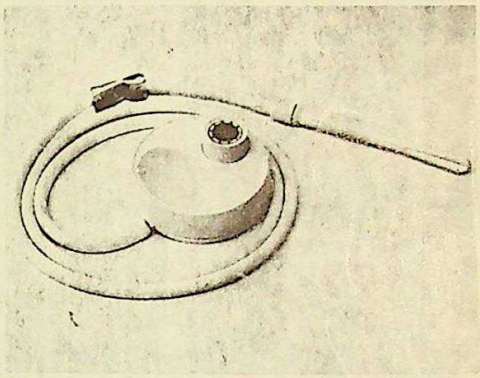

20

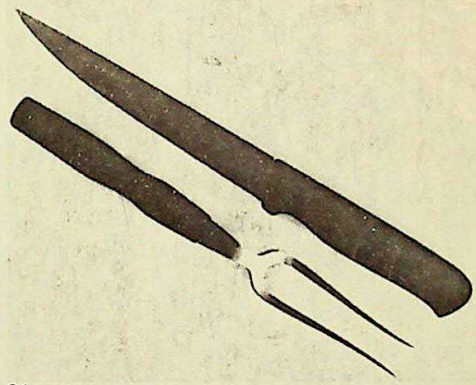

21

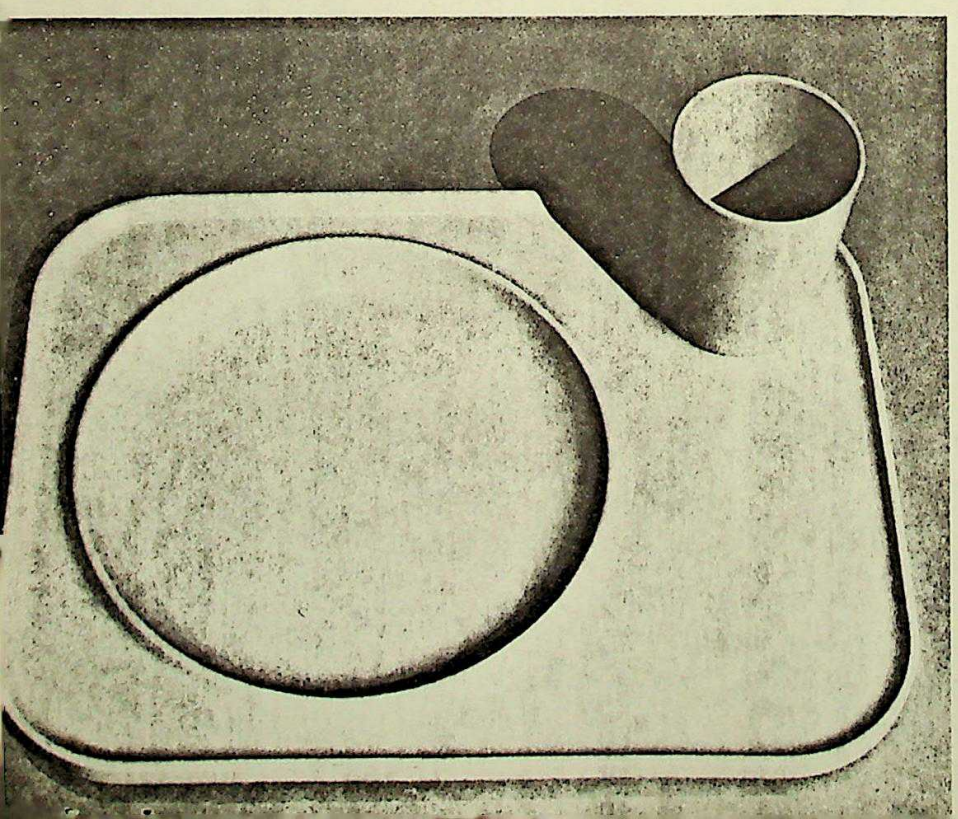

D7-553.5

D-7-553

18
Borg Milano scale design reduced tooling costs by specifying urethane rather than the steel materials found in previous models. Because of the reduced costs, styling changes are less limited. Rigid urethane cover, steel platform and base.
Design: Steve Unger Design, S. Unger.
Client: Borg Erikson Corporation.

19
Patio tray and tumbler set is inexpensive and stackable. Raised filleted edge retains spills and eating utensils; raised edge around plate area will support and position paper plate if desired. Styrene.
Design: Client's staff, T. Bell.
Client: Fesco Operations, Cities Service Company.

20
PS pulsating feminine douche/bidet works directly off bathroom faucets eliminating need for electricity and a water reservoir. The faucet adapter is integral and designed to reduce number of parts. Designers developed adaptor, eliminating need for expensive plumbing attachments. Cycolac.
Design: Lee Payne Industrial Design Inc., L. Payne, V. Gambello.
Client: Pulsatron Corporation.

21
Cutlery features polycarbonate handles which provide a high degree of toughness, resistance to chemicals encountered in the kitchen and dishwashing machine, and high heat resistance. Extensive research led to handle design that is comfortable thus reducing fatigue and increasing safety. Polycarbonate handle, stainless steel blade.
Design: Don Wallance; client's staff, W. Hublitz
Client: H.E. Lauffer Company Inc.

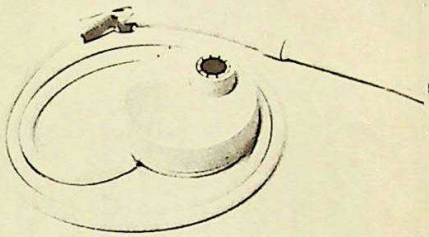

20

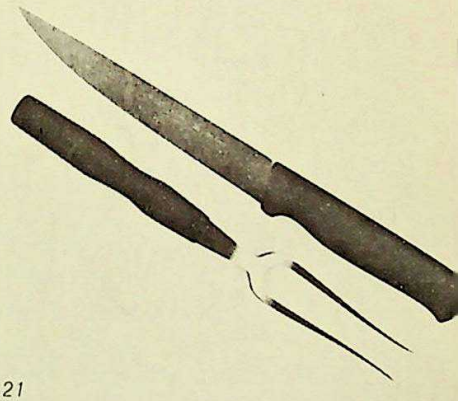

21

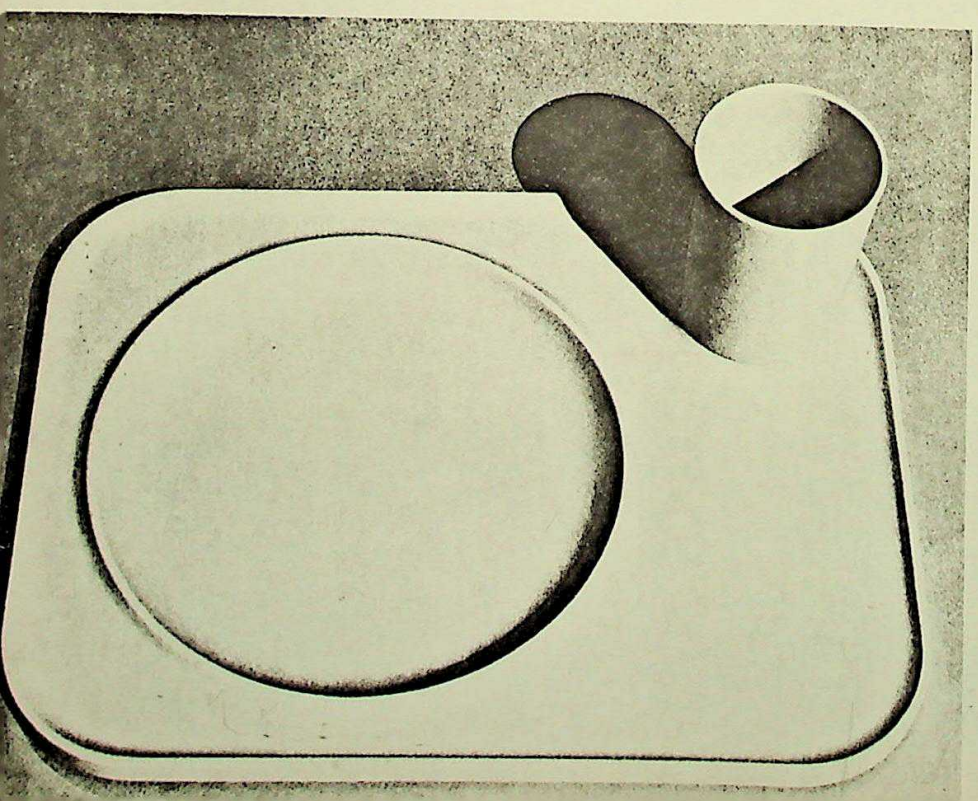

INDUSTRIAL DESIGN
P. 51
DECEMBER, 1973

D7/553.5

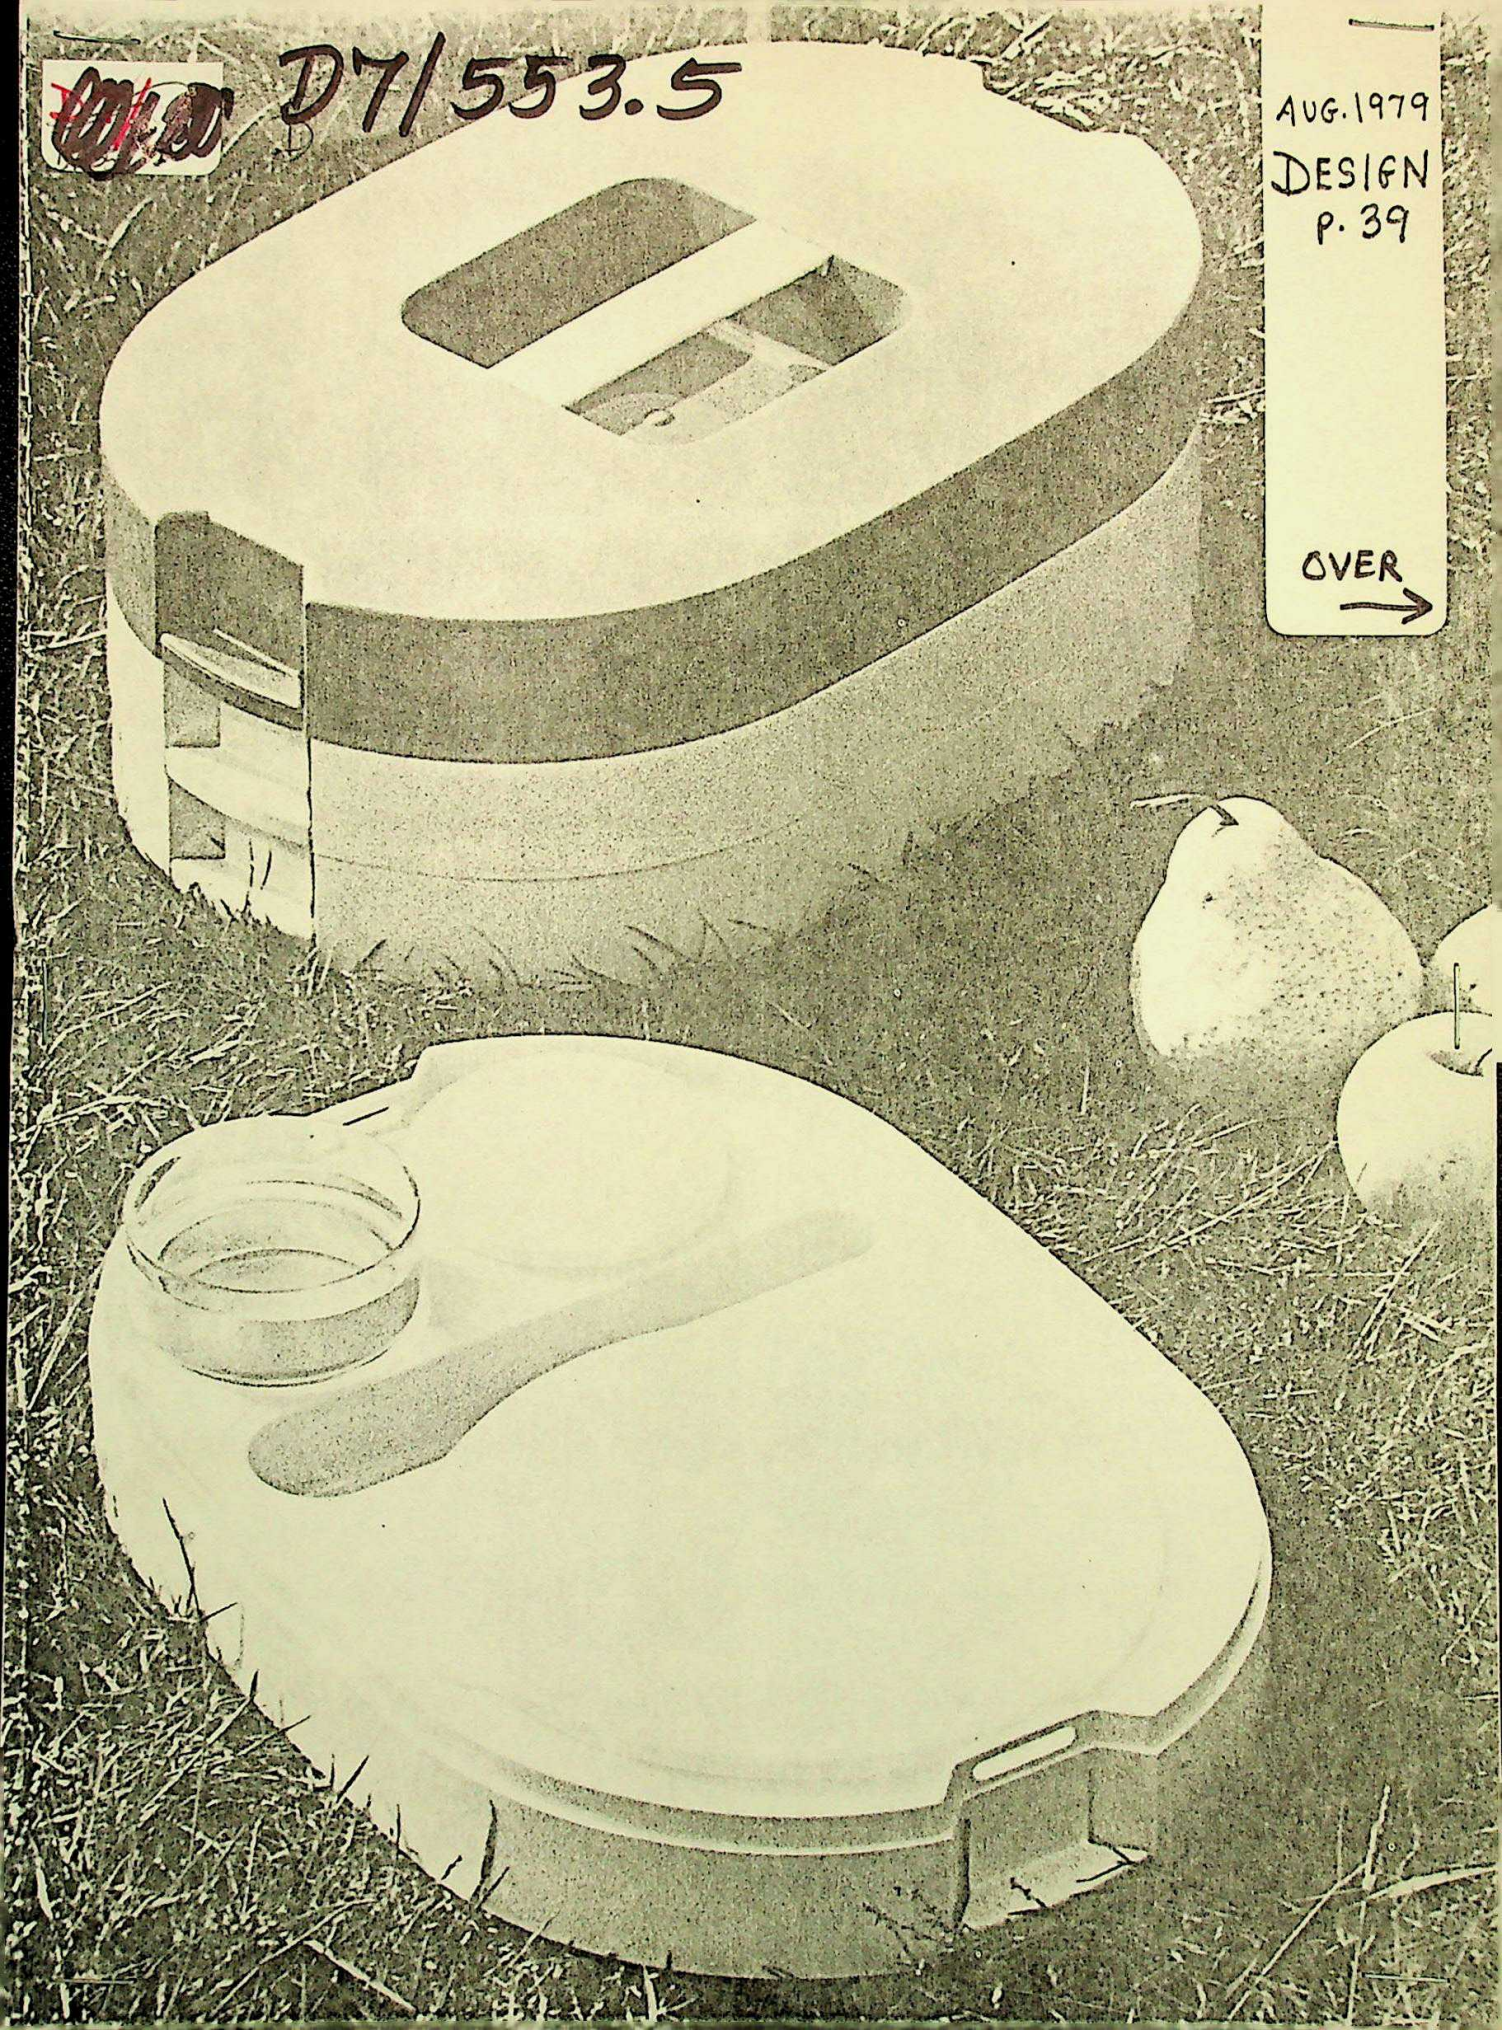

AUG. 1979
DESIGN
p. 39

OVER →

Cumberland Graphics
Designed by John Calvert, 1973.
Production began in 1974.

The Art Rollers range substitutes polypropylene handles for the wood handles of its predecessor, reducing costs by one third. Main parts are hollow polypropylene and stainless steel.

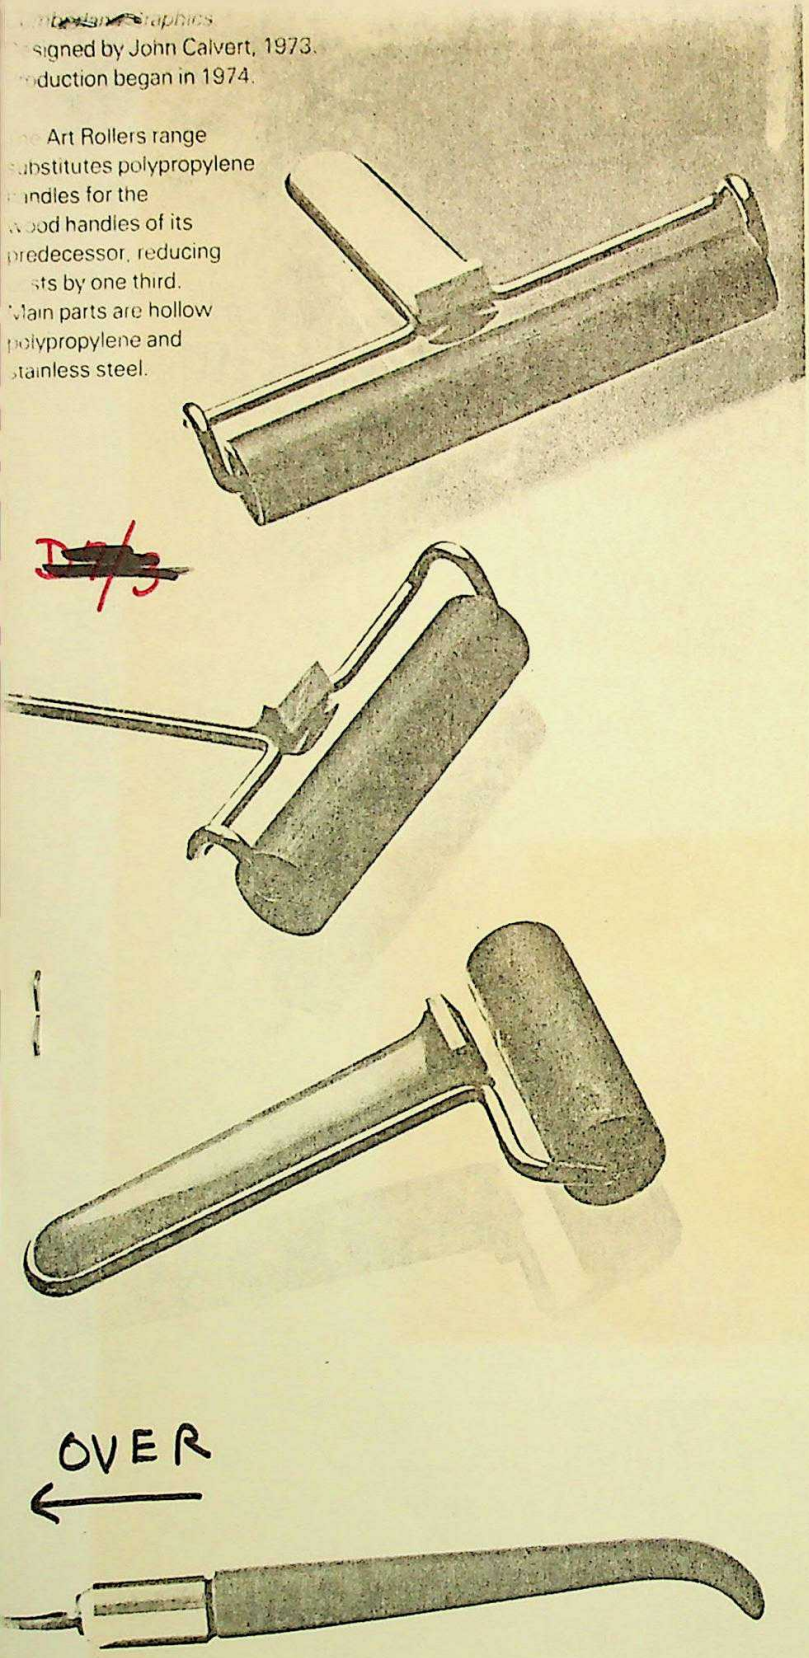

OVER

MARTYN ROWLANDS DESIGN CONSULTANTS
•Lino cutting tool for *Cumberland Graphics*
Designed by John Calvert, 1974.
Production began in 1975.

The Lino Cutting Handle features an acetal clutch mechanism to grip the cutting blade. The handle is moulded in polycarbonate and the acetal clutch is enclosed in an aluminium ferrule.

MARTYN ROWLANDS DESIGN CONSULTANTS
•Stacking picnic tray system for *Insulex*.
Designed by Martyn Rowlands, 1977.
Production began in 1979.

The Insulex Tray Boxes clip together in stacks of up to four, with a clip-on top cover, for carrying. Trays and cover are polypropylene. Internal lids in low density polythene. Illustration shows cross section of handle.

DESIGN
p. 38
AUG.
1979

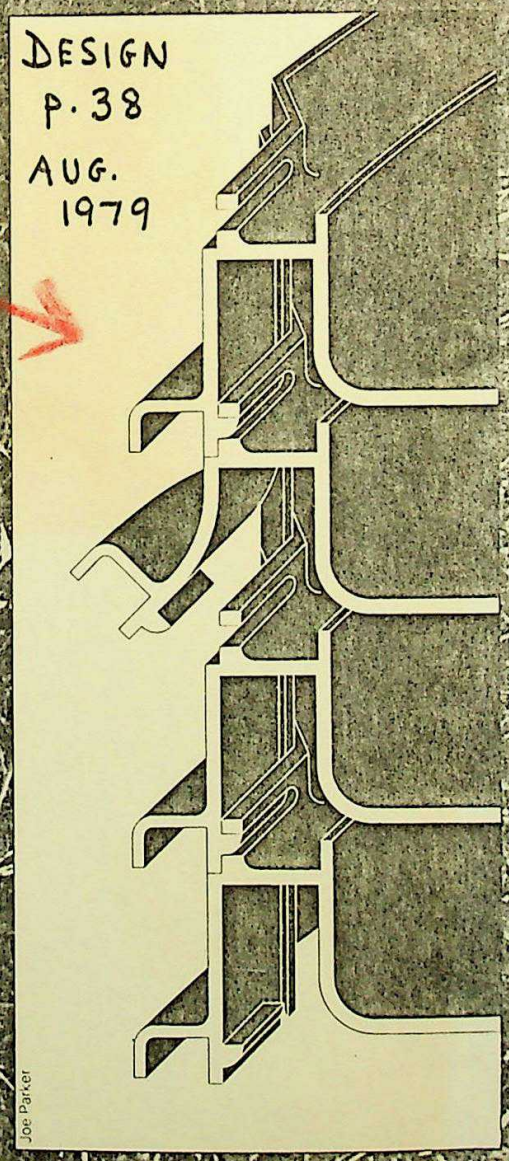

Joe Parker

07/38

D7.553.6

Page 24
July 16, 1958

Home Furnishings Daily

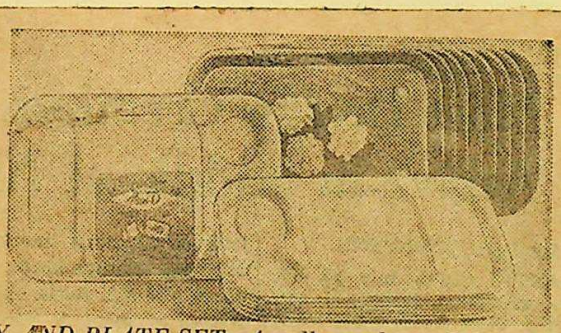

*TRAY AND PLATE SET: An all metal tray lithographed in full color with a gardenia pattern holds grease and moisture resistant disposable plates. With five deep compartments, it is introduced by Schiller & Asmus, Inc., 1525 Merchandise Mart, Chicago. Plate refills available in convenient packages. Tray is offered at suggested retail of 50 cents with refills at 90 cents per package of 15.*

RETURN TO
DESIGN DIV.

RETURN TO
DESIGN DIV.

RETURN TO
DESIGN DIV.

# 77 JULY HOUSEWARES SHOW

## Woodenware

**VERMILLION INC. (Springfield, Mo.):**
Party Tray, model 373, is made of extra thick pieces of laminated, southern oak and is called Klunky Oak. The tray is 12 x 16 in., with space for a carafe and two wine glasses, deep routing for crackers and food services, and a built-in wire cheese slicer. Suggested retail price is $25. Also new is an oak serving tray at a suggested price of $14, a cheese tray at the same price and cheese keeper with a glass dome that comes with a suggested retail price of $9.

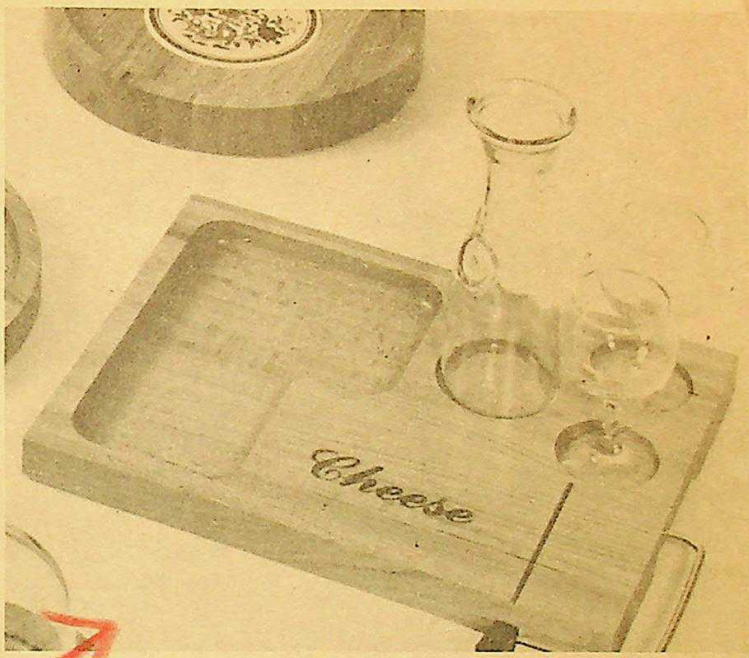

D7.553.6

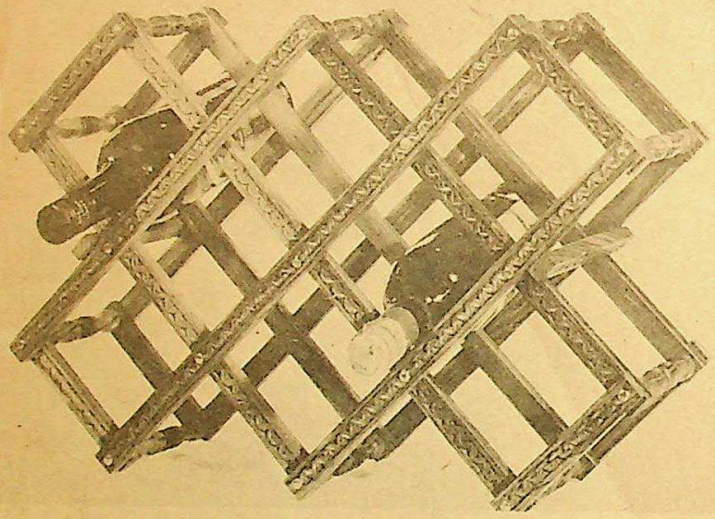

**OVERSEAS MARKETS, INC. (New York):**
Hand-carved wood wine rack at $7.50 heads a list of eight new handcrafted wood and metal items from India being shown by the firm. Other items include brass candle holders at $3.95 and $9.95; hand-carved wood wall shelf, $5.95; hand carved plant stand, $2.95; hand carved coaster set, $4.95; hand carved trivets, 95 cents retail, and woven, reversible, multicolored checkerboard door mats, $1.95 each.

**WOODFOLD-MARCO MFG. INC. (Forest Grove, Ore.):**
Marco Gourmet cart is made of 1½-in. edge grain hardwood.

The $200 retailer is on casters, has slatted shelf and what the producer claims is a lifetime washable finish.

The firm's new Marco Block Top table has solid 4-in. thick end grain hardwood top with the same washable finish. Casters with brakes are optional extras. The unit retails at $266.

**CARDWELL INDUSTRIES (Mount Carmel, Pa.):**
Walnut woodgrain finished fiberboard library bookcase comes with three shelves, each divided for book storage. The 25-in. high unit retails at $4.98.

New walnut and white stacking cubes for storage are also available at $12.98 for a set of four. Individual fiberboard cubes are 13⅜ inches square.

**LONDONAIRE LTD. (Chicago):**
Portable Pub, a travel bar holds three bottles. Molded of Uniroyal's Royalite, it is fully equipped with four 8-ounce tumblers, chromed mixing spoon and openers plus cocktail mixes. Carries a $33.50 retail.


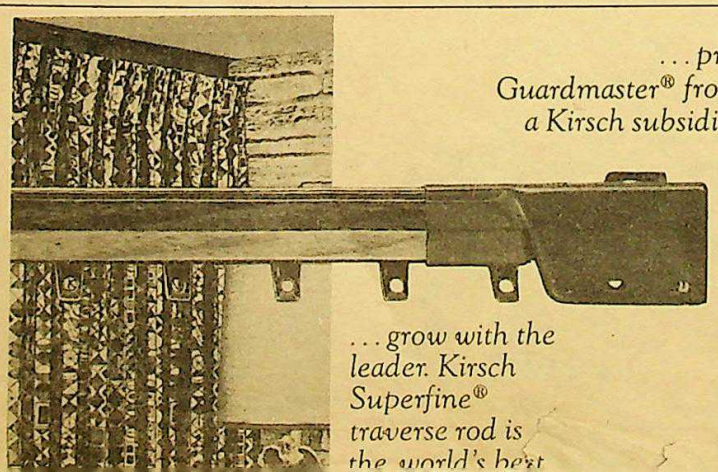

*. . . profit with ideas like Guardmaster® from Worldsbest, a Kirsch subsidiary.*

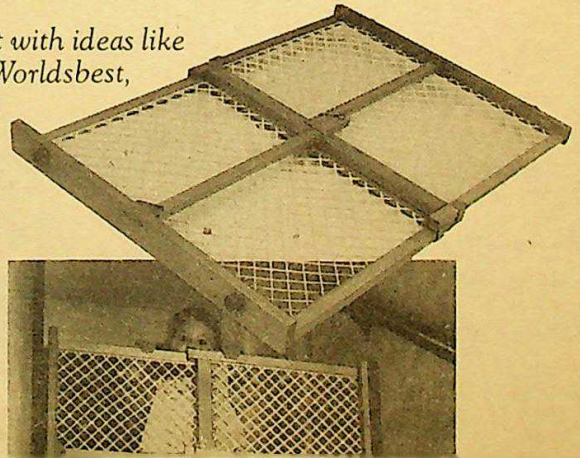

*. . . grow with the leader. Kirsch Superfine® traverse rod is the world's best*

# 13,288
~~D44-15-K~~ 92
[redacted] GREAT BRITAIN

D7-553.7

(65/15-4)

# N° 13,288 A.D. 1909

*Date of Application, 7th June, 1909—Accepted, 30th Sept., 1909*

## COMPLETE SPECIFICATION.

### Dish or Plate.

I, ALFRED LUST, a citizen of the United States, a resident of the Borough of Manhattan, City, County and State of New York, No. 949 Broadway, New York City, Restaurateur, do hereby declare the nature of this invention and in what manner the same is to be performed, to be particularly described and ascertained in and by the following statement:—

The invention relates to that type of plate or dish which is divided into compartments for holding various kinds of food by means of straight and parallel or curved partitions.

According to the present invention I employ a dish of foliated or quatrefoil shape and I form the partitions so that they join opposite cusps.

My invention is illustrated in the accompanying drawings in which
Fig. 1 is a plan view of a dish or plate embodying my invention.
Fig. 2 is a section on the line A—B of Fig. 1 and
Fig. 3 is a plan of a modified form of dish.

In all of the views like parts are designated by the same reference characters.

A dish made according to my invention may be made of crockery ware, porcelain, glass, metal or any other suitable material. As shown in the plan views the plate is made of foliated form such as the quatrefoil shape shown and is provided with a raised rim 1. One large compartment 2 is provided for holding the meat or fish, releve or entrée and a plurality of smaller compartments 3, 3, for holding vegetables, sauce and the like. The large compartment 2 preferably extends from side to side across the width of the dish as shown.

Additional compartments are formed by means of partitions 4 which rise up from the bottom of the plate or dish to a height approaching the height of the rim 1. In Fig. 1 these partitions are shown as straight, and as connecting two of the cusps 5 on the inside of the rim. A third partition divides the arc of the dish into a smaller compartment above by connecting two of the cusps, so that three small and one large compartments are produced according to the structure illustrated in Fig. 1. In Fig. 3 but two partitions are shown, which divide the dish into three compartments. If desired the bottom of the compartment 2 may be elevated in respect to the bottom of the compartments 3, 3, as in other divided plates and dishes.

This will render the contents of the centre compartment more accessible which in connection with meats or fish may be carved or otherwise served, the smaller compartments containing sauces or vegetables will require no such manipulation and therefore may be of the full depth resulting in increased capacity. The partitions 4, 4, may be straight and parallel as shown in Fig. 1, or they may be curved or irregular as shown dotted in Fig. 3 but they always connect two opposite cusps. The sides of the partitions are preferably inclined so that sharp corners in the compartments are avoided and cleansing rendered easy. For the same reason the employment of the foliated shape of the entire dish prevents sharp corners with a consequent reduction of breakage.

[*Price 8d.*]

(British) Lust 13,288 6/7/09

A.D. 1909. JUNE 7. N° 13,288.
LUST'S COMPLETE SPECIFICATION.

(1 SHEET) 2 pp. Spec

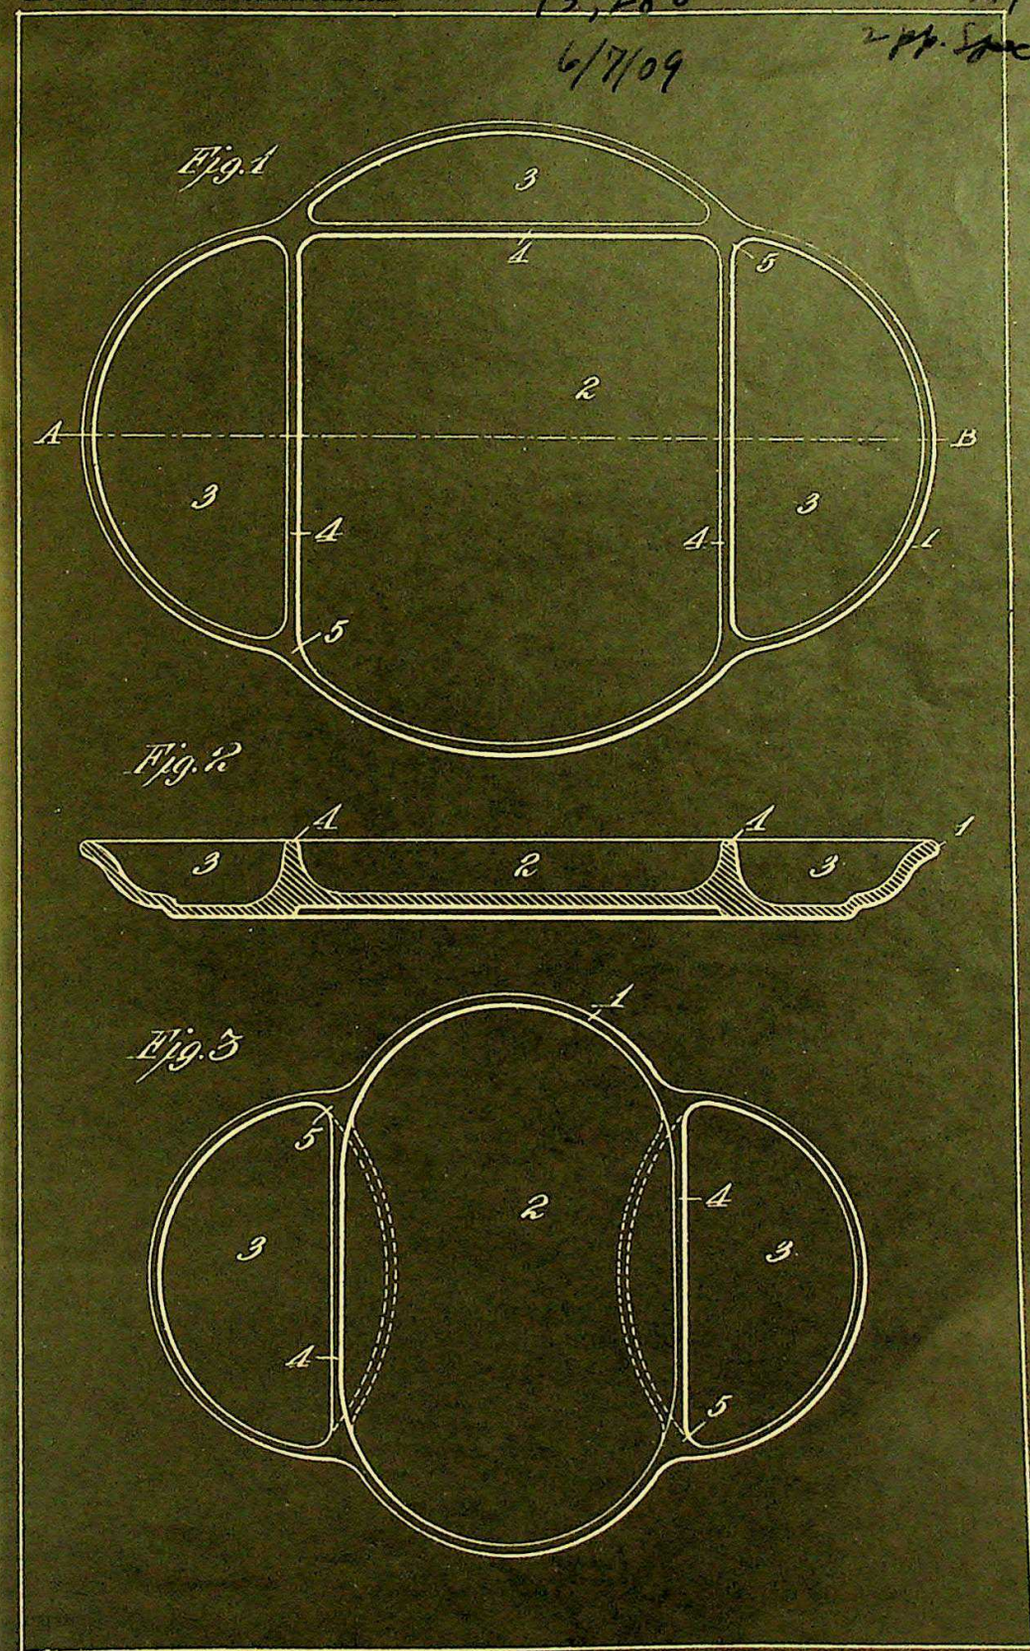


Malby & Sons, Photo-Litho.

Having now particularly described and ascertained the nature of my said invention, and in what manner the same is to be performed, I declare that what I claim is:—

1. A dish of the shape of a quatrefoil with a raised rim and dividing partitions each partition joining two opposite cusps.

2. A dish, as in Claim 1 in which the partitions are straight and parallel.

3. A dish, as in Claim 1, in which the smaller compartments are of greater depth than the largest compartment.

4. A dish or plate constructed, arranged and adapted to be used as hereinbefore described, with reference to the accompanying drawings, for the purposes specified.

Dated the 28th day of May, 1909.

HARRIS & MILLS,
Agents for the Applicant,
23, Southampton Buildings, London, W.C., and
72, Queen Street, Sheffield.

Redhill: Printed for His Majesty's Stationery Office, by Love & Malcomson, Ltd.—1909.

Dd/553.7
Page 91 - March 1944 - Modern Plastics Army Mess Tray

maintain accurately the radii in the compartments, so that trays made by the various molders could be neatly stacked and nested. Matching of the punches and cavities required considerable handwork to obtain the close tolerances required. Molds were also finished with a good polish in order to produce trays with a high luster.

## Molding

These trays are compression molded on 500-ton semi-automatic presses. It was found that preheating the compound which had been compressed into preforms approximately the size of the tray, reduced the curing cycle. The material is preheated for about 8 min. at a temperature of approximately 180° F. This operation practically assures thoroughly cured parts which consistently pass the Quartermaster Corps Specifications concerning water absorption which is not to exceed 2.5 percent. Preformed and preheated charges can be cured in from 2 to 2½ min., while bulk charges require a curing cycle of from 4 to 5 minutes. When molding bulk charges, a loading box with a sliding bottom is used. Molding temperatures which started at around 300° F. were increased during test runs, and it was finally determined that temperatures of 340 to 350° F. produce trays that satisfactorily pass all tests. In order to produce dense, thoroughly cured parts, pressures of 5000 to 6000 p.s.i. were found to be most practical. Because of the design of the part, no difficulty is experienced in removing the parts from the mold, but it was found necessary to use shrink fixtures in order to eliminate warpage. After the trays are removed from the mold they are placed in a simple wood clamping fixture for about 20 minutes. This process holds the tray flat during cooling and shrinking. After they have set, the trays do not lose their form even after alternate periods of immersion in boiling and cold water.

## Tests

Although many requirements were established governing the inspection and tests of these trays, the most important concerned odor, resistance to boiling water, warpage and water absorption. The odor test is (*Please turn to page 172*)

2

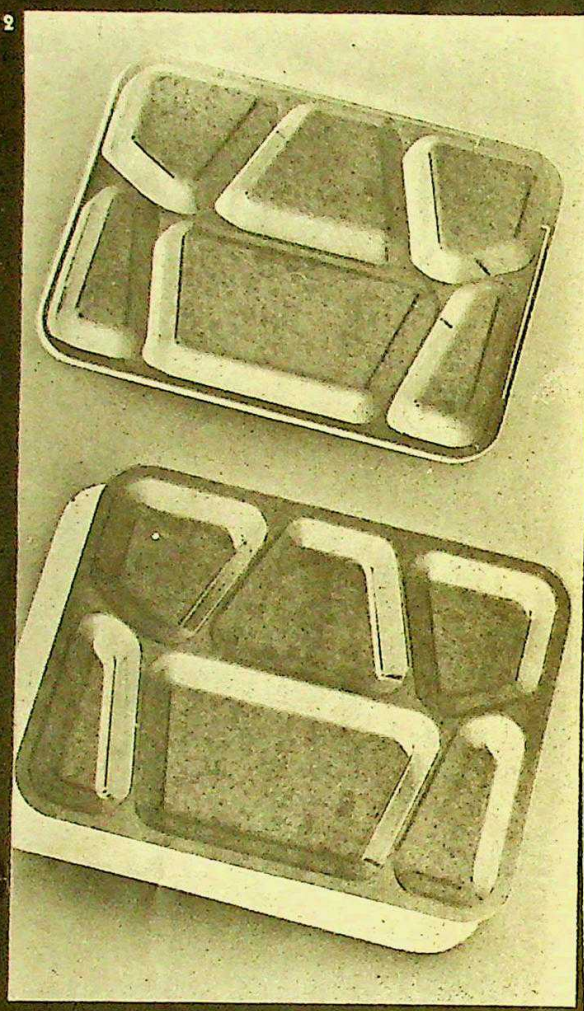

DRAWING, COURTESY ECLIPSE MOLDED PRODUCTS CO.

3

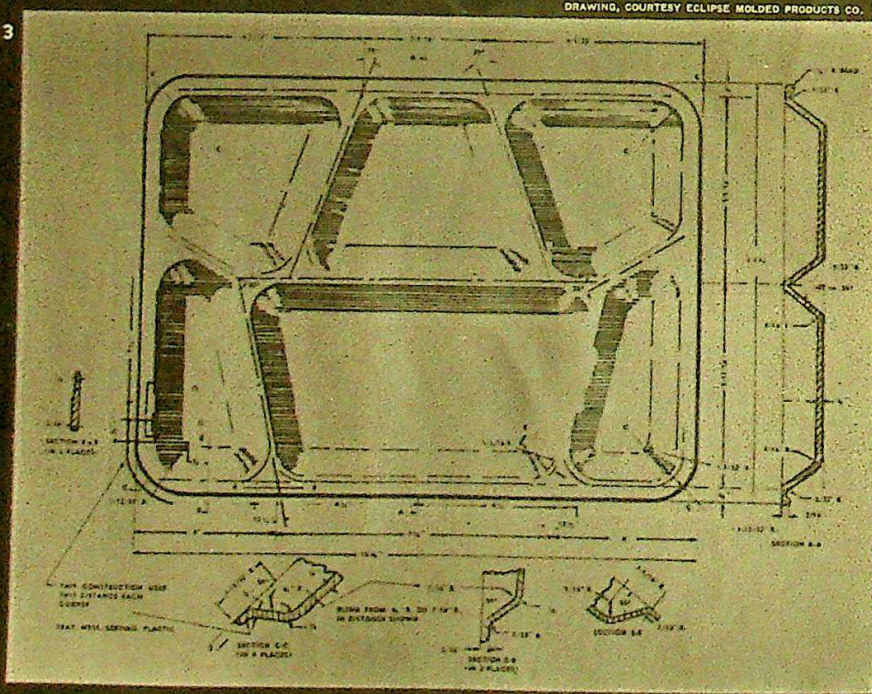

*2—Back and front views of the mess tray show how the compartments are designed to accommodate any type of meal. 3—This sectional diagram illustrates the 30° taper in the compartments. A ⅛ in. R beading enables the tray to fit into Army serving truck racks*

D7
553.7

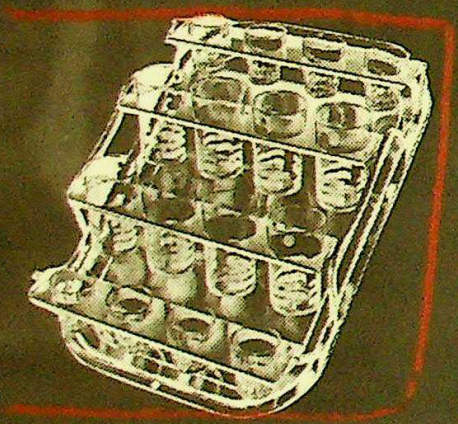

ABOVE:

SPECIAL GIFT is this new electric grill which can be used either for grilling right at the point of service or for keeping food warm while it is being served. Can also be used as a bar or tea wagon. The frame is available in either polished brass or super-plated chrome. The wood shelf below comes in either walnut or bleached oak. It lists for $135. From the National Silver Deposit Ware Co., Inc., 44 West 18th St., New York.

LEFT: Top to Bottom:

COME AND GET IT, a new bell in the barbecue line, is one of the groups of bells designed and manufactured by the California Bell Co., 708 S. Narengo Ave., Alhambra, Calif. Measuring 5½ inches in diameter, it is wholesale priced at $3.25 each in verdi green; $4 in antique bronze; and $4.50 in antique polished bronze, with hooks (in the same finishes) ranging from $10.50 to $13.50 a dozen.

PICNIC TIME IS BASKET TIME. Mexican hand-woven palm leaf baskets are offered by Henry S. Beach, El Paso, Texas. The large picnic basket, lacquered in brilliant colors, measures 11½ inches long, 8½ inches wide and 6 inches deep. Has strong handle, and tight fitting cover. Priced at $15 a dozen. The little round basket comes in assorted, vivid colors. It is 6 inches in diameter and 5½ inches deep, and has a durable handle and tight fitting cover. Priced at $5 a dozen. The shoulder bag is 8 inches long, 4 inches wide and 6 inches deep. Has extra long straps. Priced $7.50 a dozen.

SPILLPROOF is the Til-Tray, which can be tilted to a perfectly vertical position without spilling a drop of liquid. The tray can be used flat, tilted, or hung on the wall to make a convenient bar rack. Finished in chrome, it is equipped with eight beverage and eight whiskey glasses, each fitted into a separate pocket. Retails for $8.95. From the Adams Mfg. Co., 911 Filbert St., Philadelphia, Pa.

SNACKS mean business. These hand-painted plastic snack trays in sets of four come in assorted pastel colors. Ornamented with floral designs. Priced at $3.60 a dozen. From the studios of Morton A. Netter, 1017 North Front St., Philadelphia.

Z. & A. B. May,
Page 44
May, '49

Copy of U.S. Patent Office
For Examiners Use Only

MODERN PLASTICS 10-1953 P. 123

D7/553.7

Ideal for serving small parties is a space-saving swivel buffet tray molded of Dow styrene. When open, the tray presents seven separate wells that can be used to hold different foods. Handles are removable so the unit can be disassembled. The four individual serving trays may be used separately. Colors include forest green and chartreuse; pearl gray and forest green; pearl gray and burgundy. Molded by Loma Plastics, Inc., 3000 W. Pafford St., Fort Worth, Texas.

D7.553.7

Page 28
Aug. 5, 1957
117

Home Furnishings Daily

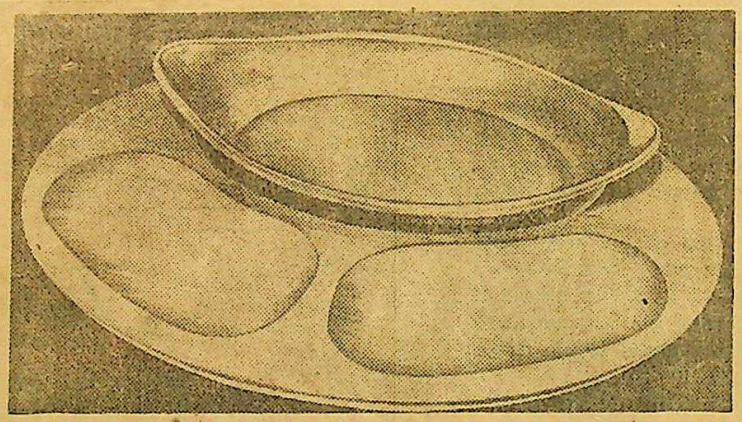

*SMART SIZZLER: Contemporary lines are emphasized on this 10x14-inch serving piece by Gladmark Woodenware, Burbank, Cal. With a cast aluminum cassesrole and hardwood platter, birch model will retail at $7.95, walnut style for $8.95.*

RETURN TO
DESIGN DIV.

RETURN TO
DESIGN DIV.

RETURN TO
DESIGN DIV.

D7-553.7

HOUSEWARES REVIEW
6-1960
p. 44



KING-SIZE "Dip-Dish" of polyethylene is 10½" in dia. x 3" deep, has scalloped edges. Deep-set center bowl holds generous portion. White, pink, turq., lemon-yellow. $1.80 ret. Blisscraft of Hollywood, Box 47607, Los Angeles 47.

D7/553.7

For everyday elegance
— the choice is 'Staybrite' Stainless Steel

This attractive dish from the Chichester range of tableware is another fine example of British craftsmanship in Stainless Steel

p. 86

TABLEWARE FEBRUARY 1964

FIRTH-VICKERS STAINLESS STEELS LIMITED · STAYBRITE WORKS · SHEFFIELD

Stainless Steel

PAGE TOP ↑

D7.5537
GIFT & TABLEWARE REPORTER FEB., 1974 p.45

**BLOOMING BEAUTIES**
Lotus bowls make any food more appealing. Four functional sizes are a delight to the eye.

ROYAL KRONA
SWEDEN

ROYAL KRONA
Glassmakers of
Sweden, Ltd.
225 Fifth Avenue
New York, N.Y. 10010
(212) 685-3935

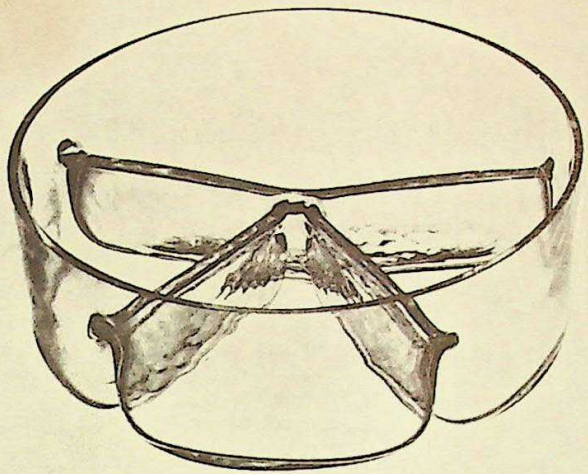

**SNACK-SATIONALS**
Hors d'oeuvres bowls in 3 sizes. Lightweight, yet sturdy . . . a welcome addition to any cocktail table.

ROYAL KRONA
SWEDEN

ROYAL KRONA
Glassmakers of
Sweden, Ltd.
225 Fifth Avenue
New York, N.Y. 10010
(212) 685-3935

**CONVERSATION PIECES**
Truly unusual square dishes. Colorful toasts from around the world highlight this new excitement in glassware. Available in 4 sizes.

ROYAL KRONA
Glassmakers of
Sweden, Ltd.
225 Fifth Avenue
New York, N.Y. 10010
(212) 685-3935

ROYAL KRONA
SWEDEN

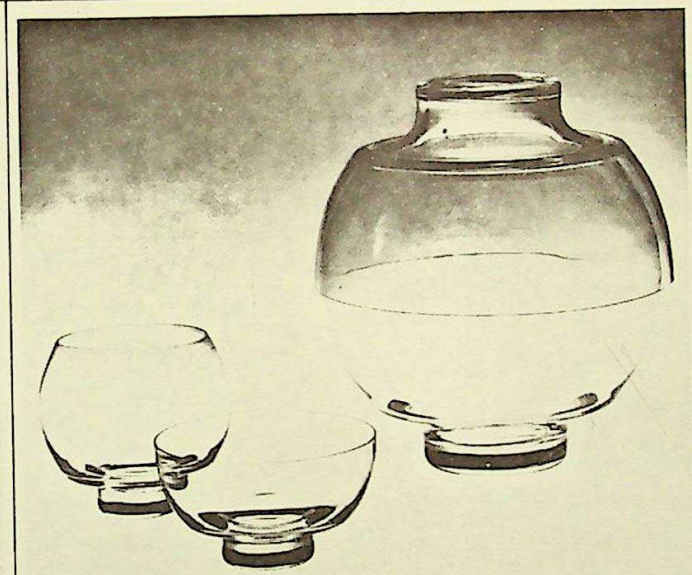

**TWICE THE BEAUTY**
Magnificent double bowls in 2 sizes. A masterpiece of the art of Swedish glassmaking.

ROYAL KRONA
SWEDEN

ROYAL KRONA
Glassmakers of
Sweden, Ltd.
225 Fifth Avenue
New York, N.Y.
10010
(212) 685-3935

# On Display at 225 Fifth Avenue, New York

FEBRUARY 16 — MARCH 1

MORE NEWS ● MORE OFTEN

D7.553.7

FLYER RECEIVED
JANUARY 6, 1988

Rec'd. JAN. 6, 1988

# Plates With Shapes . . .
## Can Make Mealtime Fun!

Watch their faces light up at this exciting new children's dinnerware that makes eating a happy time. Bright, colorful sectioned plates of heavy dishwasher safe melamine.

Coordinated placemat, cup and flatware complete the set.

***Your child will love them!***

**$19.95**
COMPLETE SET

**#20**
**Lucky No. 7 Race Car**

**#30**
**Giant Ice Cream Cone**

See Other Side for Hardcover Book Selection

**MYRTLE BEACH MARKETING, INC.**
**P.O. Box 8462, Myrtle Beach, SC 29578**

Send _____ set(s) of RACE CAR DINNERWARE at $19.95 plus $2.00 per set for postage and handling. ($21.95) **#20**

Send _____ set(s) of ICE CREAM CONE DINNERWARE at $19.95 plus $2.00 per set for postage and handling. ($21.95) **#30**

S.C. residents add 5% Sales Tax. Enclose this coupon with check or money order. For additional orders use separate sheet.

Name _____

Address _____

City _____ State _____ Zip _____

☐ I am ☐ I am not a grandparent.

Birthdate: month _____ /day _____ /year _____ DCWD18

Copyright by Myrtle Beach Marketing, Inc. 1987

© BY MYRTLE BEACH MARKETING, INC. 1987

BRUSHES & ARTISTS MATERIAL
D7-553.8
p.265



# ARTISTS' CHINAWARE

## FINE QUALITY, GLAZED CHINAWARE

Fine quality, white glazed China for water colors, photo-retouch colors, drawing inks, photo-tinting colors, etc.



**No. 933 Oblong Palette**

| Sizes: | 4" x 6" | 5" x 7" | 6"x9" |
|---|---|---|---|
| Price each | $0.40 | .50 | .80 |



**No. 934 Oval Palette**

| Sizes: | 4" x 6" | 5" x 7" | 6" x 9" |
|---|---|---|---|
| Price each | $0.40 | .50 | .80 |



**No. 932 China Ink Slab**

Size: 1½" x 2¾"

Price each $0.20

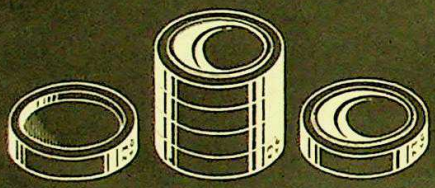

**No. 930 China Water Color Nests**

| | Size 0 | Size 1 | Size 2 |
|---|---|---|---|
| Diameter | 2⅝" | 3⅞" | 3⅜" |
| Price each | $0.80 | 1.00 | 1.20 |

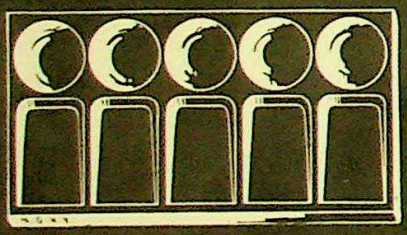

**No. 929 China Slant with Wells**

Size: 4" x 7½" 5 slants with 5 wells.

Price each $0.40

**No. 928 China Color Slants**

Size: 3 slants 2½" x 4" 6 slants 3⅛" x 8"

Price each $0.20 .40

**China Recessed Slab Palette**

No. 931 Size 6⅛" x 7¼" 28 wells with 2 slants. Price each $1.00

# Your Reliable Source for Quality Houseware

HONG KONG ENTERPRISE PAGE 353 Nov. 1987

D7-554.8

838

801

802

705

8009

8010

703

A

B

C

D

E

701

FOR BARBECUES, COCKTAILS, PICNICS

Nov. 1987
p. 353

707

A

E

B

C

D

## WAH ON CO.

ROOM 505A CHEUNG KEE BUILDING, 84-86 DES VOEUX ROAD, CENTRAL, HONG KONG.
G.P.O. BOX: 5313, HONG KONG TEL: 5-416083, 416987 TELEX: 66627 WAONY HX FAX: 5-8153503
BANK: SHANGHAI COMMERCIAL BANK LTD.